



**Ledaks<sup>®</sup>**






**LED LIGHTING PROFILES & ACCESSORIES**

**2026**

- \* İç Mekan, LEDBAR-Işık bandı, Led Aydınlatma Alm. Prf. ve Aksesuarları sf ; 1-15 aralığı
- \* Indoor, Led Lighting Aluminium Profiles and Accessories pg; 1-15
- \* Dokunmatik ve Hareket Sensörleri sf ; 7-8
- \* Touch - Motion Switches pg; 7-8
- \* İç dış Mekan Led Aydınlatma, Plastik Prf. ve Aksesuarları sf ; 16
- \* Indoor-Outdoor Plastic Profiles and Accessories sf; 16
- \* Led Aydınlatma, SİLİKON NEON LED Profil ve Aksesuarları sf ; 17-18
- \* Led Lighting Silicone Neon led Tubes, Profiles and Accessories sf; 17-18
- \* Dış Mekan, Silikon-Neon Lede Uygun Alüminyum Prf. Kasaları sf ; 19
- \* Aluminium Cases For Outdoor Neon Led Tubes sf; 19
- \* İç Mekan, L KÖŞE ( 45° ) Alüminyum Prf. ve Aksesuarları sf ; 21-22
- \* Indoor Corner ( 45° ) Aluminium Profiles and Accessories pg; 21-22
- \* İç mekan, Led Aydınlatma Alüminyum prf. ve aksesuarları sf ; 23-31 aralığı
- \* Indoor, Lighting Aluminium Profiles and Accessories pg; 23-31
- \* Polikarbon YUVARLAK Profiller - Alüminyum Kaynak Telleri sf ; 32
- \* Polycarbon round Profiles - Aluminum welding wires sf; 32
- \* İç mekan, Led Aydınlatma Akvaryum Prf. ve Aksesuarları sf ; 34-35
- \* Indoor, Led Lighting AQUARIUM Aluminium Profiles and Accessories pg; 34-35
- \* İç Mekan, Led AVİZE Profil ve Aksesuarları sf ; 36-44 aralığı
- \* Indoor, Led Chandelier Profiles and Accessories pg; 36-44
- \* İç Mekan, Ledli Merdiven Aydınlatma, Alm. prf. ve Aksesuarları sf ; 45
- \* Indoor, Led Stair Lighting Aluminium Profiles and Accessories pg; 45
- \* İç Mekan, Ledli SÜPÜRGE LİK Aydınlatma, Alm. prf. ve Aksesuarları sf ; 46-48 aralığı
- \* Indoor, Led Skirt Lighting Aluminium Profiles and Accessories pg; 46 and 48
- \* İç Mekan, KARTONPİYER Alüminyum Prf. ve Aksesuarları sf ; 49-52 aralığı
- \* Indoor, Led Lighting Alm. Profiles and Accessories pg; 49-52
- \* İç Mekan, Islak Zemin SERAMİK Alüminyum Prf. ve Aksesuarları sf ; 53
- \* Indoor, Ceramic Led Lighting Alm. Profiles and Accessories pg; 53
- \* İç Mekan, Sıva Altr-ALÇIPAN, Led Aydınlatma Alm. Prf. ve Aksesuarları sf ; 54-60 aralığı
- \* Indoor Drywall, Aluminium Profiles and Accessories pg; 54-60
- \* İç Mekan, Sıva Altr-ANKASTRE, Led Aydınlatma Alm. Prf. ve Aksesuarları sf ; 61-69 aralığı
- \* Indoor Recessed, Ankastr Aluminium Profiles and Accessories pg; 61-69
- \* İç Mekan, Sıva Üstü LİNEER, Led Aydınlatma Alm. Prf. ve Aksesuarları sf ; 70-99 aralığı
- \* Indoor Lineer - Over Plaster Aluminium Profiles and Accessories pg; 70-99
- \* İç Mekan, ETANJ, Led Aydınlatma Alm. Prf. ve Aksesuarları sf ; 100-105 aralığı
- \* Indoor, Etange Aluminium Profiles and Accessories pg; 100-105
- \* İç-Dış Mekan, Led Aydınlatma Alm. Prf. ve Aksesuarları sf ; 106-115 aralığı
- \* Indoor, Outdoor, Led Lighting Aluminium Profiles and Accessories pg; 106-115
- \* Dış Mekan, WALLWASHER Alm. Prf. ve Aksesuarları sf ; 116-122 aralığı
- \* Outdoor Wall Washer Aluminium Profiles and Accessories pg; 116-122
- \* Dış Mekan, SOKAK ARMATÜR Kasaları sf ; 123-124 aralığı
- \* Outdoor Street Lighting Cases pg; 123-124
- \* Dış Mekan, PROJEKTÖR Kasa Alm. Prf. ve AKSESUARLARI sf ; 125-131 aralığı
- \* Outdoor Projector-Flood Light Cases of Aluminium Profiles and Accessories pg; 125-131
- \* REKLAM Profilleri sf ; 33 ve 132
- \* Advertisement Profiles pg; 33 and 132
- \* KUTU-SÜRÜCÜ-SİGMA-BORU Alüminyum Profilleri sf ; 133-134 aralığı
- \* Box - Driver - Sigma - Tube Aluminium Profiles pg; 133-134
- \* DAİRESEL Alüminyum Soğutucu Profiller sf ; 135-147 aralığı
- \* Aluminium Round Heatsink Profiles pg; 135-147
- \* DÜZ-KOMPENENT Alüminyum Soğutucu Profiller sf ; 148-162 aralığı
- \* Aluminium Component Flat Heatsink Profiles pg; 148-162

### NEW PRODUCTS - YENİ ÜRÜNLER

sf.9 YA-041 / sf.11 YA-026 Y / sf.15 YA-043, YA-044 / sf.16 YP series / sf.17 YPL Silicone Neon Led series / sf.18 YP Silicone Tube series /  
sf.19 YA-036, YA-037, YA-038, YA-039, YA-040 / sf.22 YA-030 / sf.29 MD-685B / sf. 30 GO-25, GO-26 / sf.34 YA-AK03 / sf.38 AVZ-008 /  
sf.39 AVZ-013 / sf.40 AVZ-22 / sf.41 AVZ-018 / sf.44 AVZ-041, AVZ-042 / sf.48 YA-ALS 01, YA-ALS-02 / sf.49 YA-KP 01, YA-KP 01 D /  
sf.50 YA-KP 002 / sf.51 YA-KP 009 / sf.52 YA-KP 010 / sf.53 YA-SR 15 / sf.56 YA-ALC 02 / sf.57 YA-ALC 03, YA-ALC 04 / sf.58 YA-ALC 25 /  
sf.66 YA-212 / sf.68 YA-G75 EKO / sf.73 YA-227 / sf.74-79 Custom Shaped Pendant Lighting Cases / sf.84 YA-229 R, YA-G40 R /  
sf.85 YA-230 R, YA-G30 R / sf.86 YA-228 / sf.102 YA-1206 Y / sf.105 EP-102 / sf.107 YA-046







YA-001 A PC.

YA-001 C PC.

YA-001 E PC.

YA-001 F PC.







YA-001 ALU. YA-001 A PC.

YA-001 ALU. YA-001 C PC.

YA-001 ALU. YA-001 E PC.

YA-001 ALU. YA-001 F PC.




PC.DIFFUSER-ALU.PRF. 610 cm

PC.DIFFUSER, OPAL - TRANSPARENT



Application of YA 001 A1-YA 001 A2 - YA 001 S

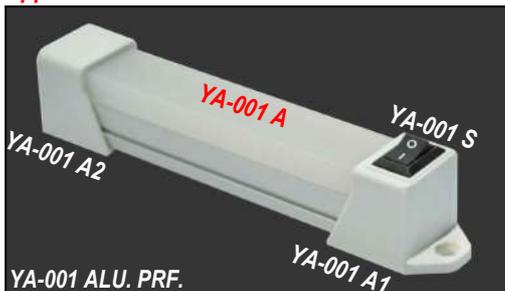

Application of YA 001 F2-YA 001 F3 - YA 001 S



All cutting dimensions and surface coatings can be done according to requirements

YA-001 A3


Alu.End Cap



Suitable for YA 001 A

YA-001 D

Alu. Wall Mounting Acces.



Aluminium Length; 2 cm

YA-001 D 1

Wall Mounting Acces.



Stainless Steel


YA-001 D 2

Wall Mounting Acces.




Stainless Steel


APPLICATION OF YA-001, YA001 A PC DIFFUSER

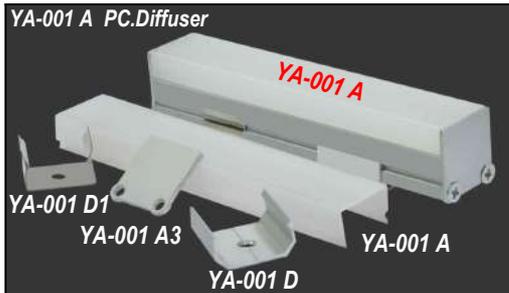

APPLICATION OF YA-001, YA001 C PC DIFFUSER

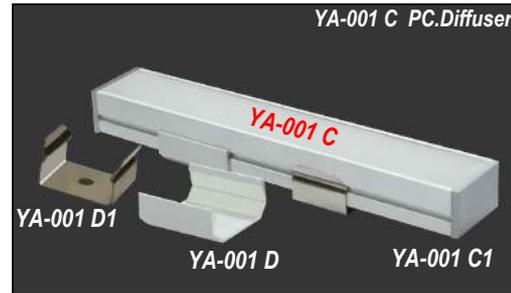


APPLICATION OF YA-001, YA001 E PC DIFFUSER

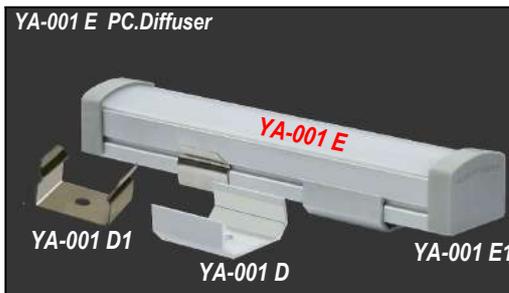

APPLICATION OF YA-001, YA001 F PC DIFFUSER





Length of YA-001 D ; btw. 2 - 610 cm

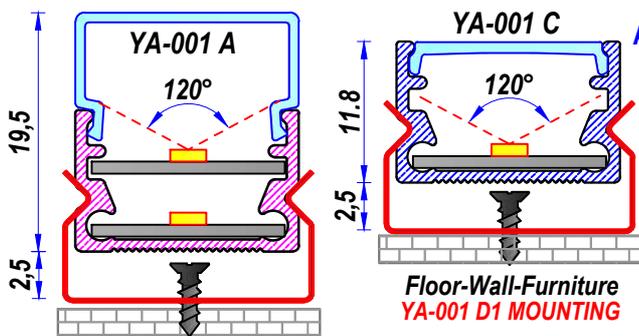



















Angular App. of YA 001 & YA 001 F PC Dif. with YA-001 D2









Light Beam Angle Application

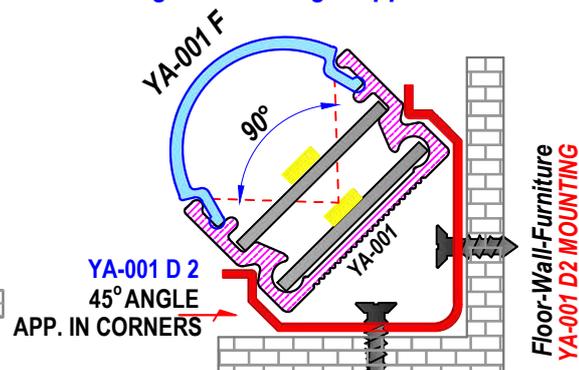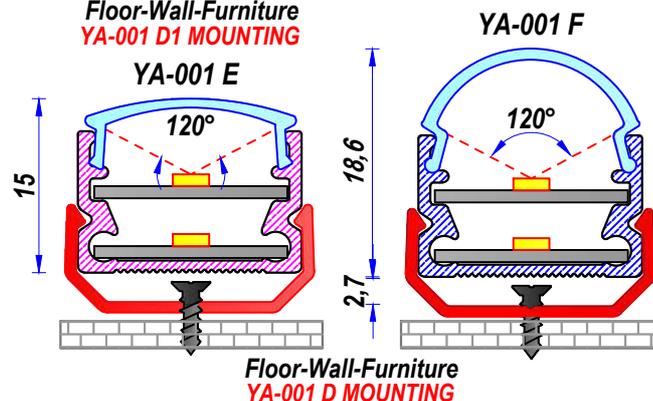



All cutting dimensions and surface coatings can be done according to requirements

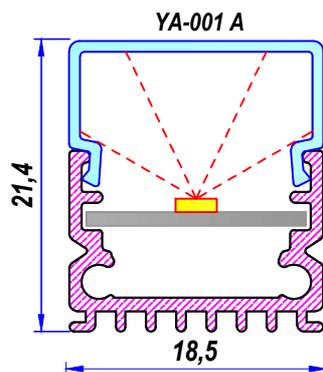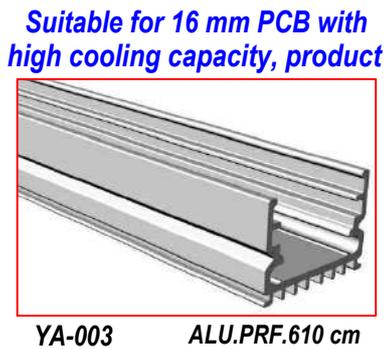

All cutting dimensions and surface coatings can be done according to requirements



PC. DIFFUSER - ALU.PRF. 610 cm



YA-005

YA-001 E

YA-005

YA-001 F

5 Different Pls. End Cap for 3 Different P.C. Diffusers







Application Of YA-001 E PC. Diffuser




Application Of YA-001 F PC. Diffuser



5 different Pls. End Cap are in stock suitable for YA-001 E, YA 001 F, YA-001 C

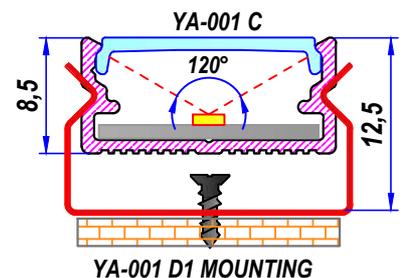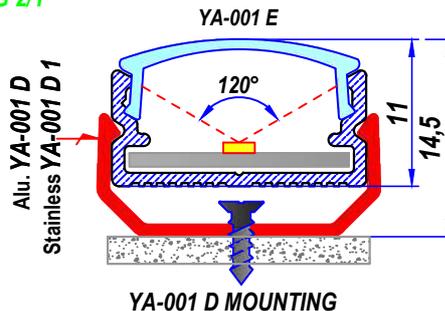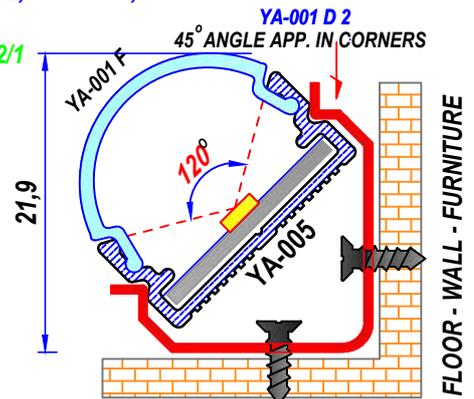


All cutting dimensions can be done according to requirements



**YA-006** IP 65  
Alu.Led Case

Suitable for outdoor applications  
Suitable for 12 mm PCB  
High cooling capacity IP 66



**YA-006 A**  
PC.Diffuser

Opal - Transparent




**YA-006 B**  
Plastic End Cap

Light Gray



**YA-006 C**  
Plastic End Cap

Light Gray

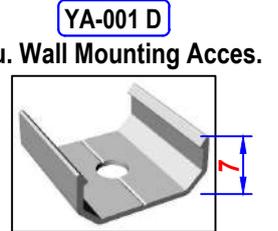


**YA-001 D**

Alu. Wall Mounting Acces.

Length; 2 cm




YA 006

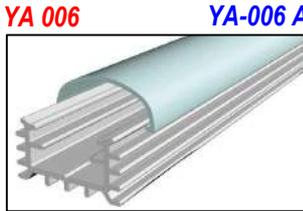

YA 006

YA-006 A

PC.DIFFUSER - ALU.PRF. 610 cm

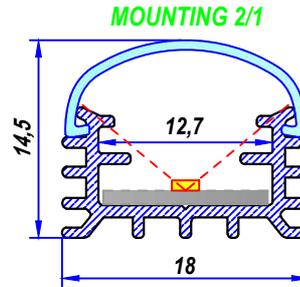


MOUNTING 2/1



**YA-001 D 1**


Wall Mounting Acces.

Stainless Steel

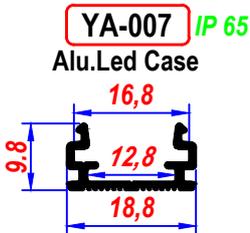

**YA-007** IP 65  
Alu.Led Case

Suitable for outdoor applications  
Bottom; Suitable for 12 mm PCB  
Top; Suitable for 16 mm PCB



**YA-006 A**  
PC.Diffuser

Opal - Transparent



**YA-007 A**  
Plastic End Cap

Light Gray



**YA-007 B**  
Plastic End Cap

Light Gray




**YA-001 D**

Alu. Wall Mounting Acces.

Length; 2 cm




YA 007

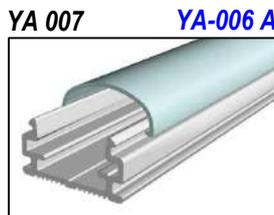

YA 007


YA-006 A

PC.DIFFUSER - ALU.PRF. 610 cm

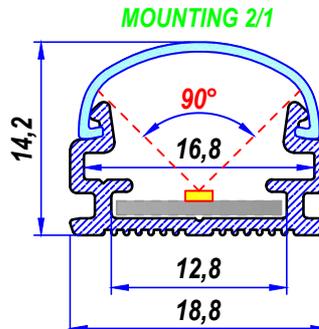


MOUNTING 2/1

**USAGE AREAS;**  
Furniture, Kitchen, Floor, Wall etc.  
Suitable for 12-16 mm PCB  
Decorative Surface Mount Led Prf.



**YA-008**  
Alu.Led Case

Bottom; Suitable for 12 mm PCB  
Top; Suitable for 16 mm PCB

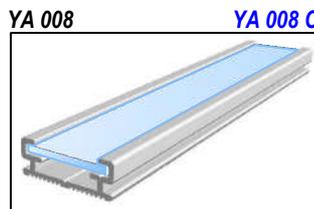

YA 008

YA 008 C


**USAGE AREAS;**  
Furniture, Kitchen, Floor, Wall etc.  
Suitable for 12-16 mm PCB  
Decorative Surface Mount Led Profile




**YA-001 D**

Alu. Wall Mounting Acces.


Width; 2 cm



**YA-008 C**  
PC.Diffuser

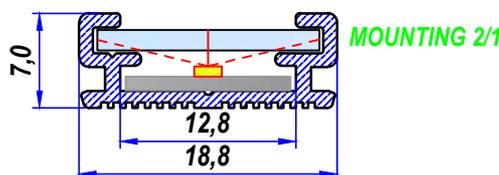

MOUNTING 2/1








**YA-001 D 1**


Wall Mounting Acces.







Stainless Steel  
Width; 1,9 cm

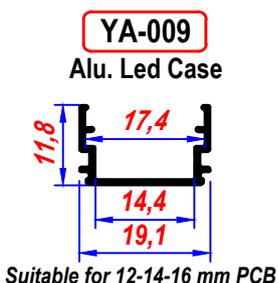


Suitable for use as cable duct and wall mounting accessories by attaching to each other

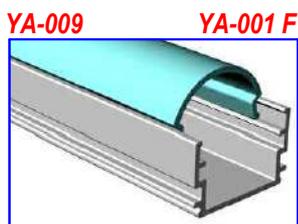

ALU. & PC.DIFFUSER 610 cm

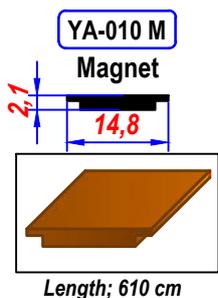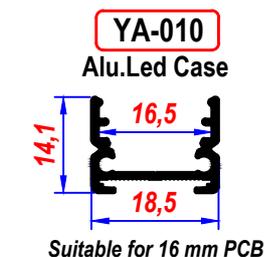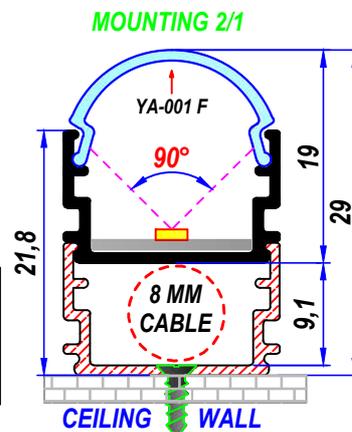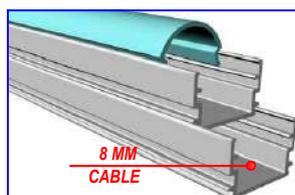


Application of Magnet Profile





Easy installation on metal surfaces with an interference-fit magnetic profile without the need for wall mounting hardware  
Areas of use: Furniture, Kitchen, Floor, Wall,


**YA 010 Alu.Prf. & Accessories**







PC.DIFFUSER-ALU.PRF. 610 cm  
OPAL - TRANSPARENT

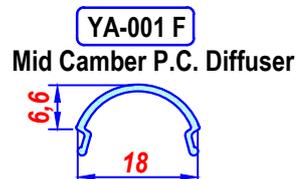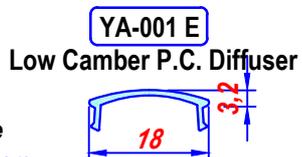

**YA-001 E 1** Low Camber Plastic End Cap **YA-001 F 1** Mid Camber Plastic End Cap



Suitable for YA 001 A

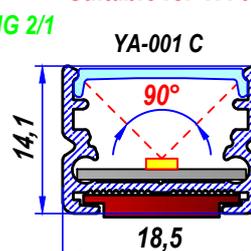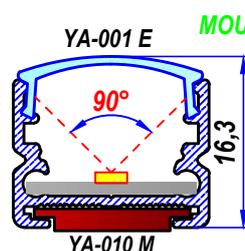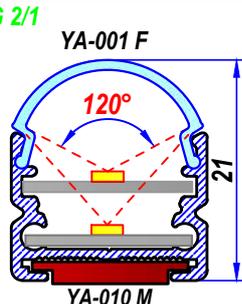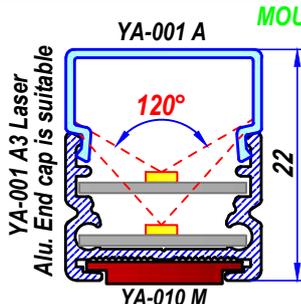

**YA-004 D Touch Sensor**

Operating Range ; 12 volt - 3 Amp

Power ; 36 W

Dimensions ; 40 x 13 mm

Max. sensor cable length: 3 meters.

For stable operation of the product, used with New Model Adapter (Switch Mode Power) and grounding is necessary.

Be careful not to let the sensor tip cable, touch the metal casing.

Suitable with YA-001, YA-005, YA-016, YA-102, YA-1002 etc.

**YA-004 H1 Digital Motion Sensor**

Operating Range ; 5-30 volt - 3 Amp

Range of flashing ; 30 sec, 1 mn, 2 mn

Sensing distance ; 5 mt

Output Current can increased to 10 Amp


Dimensions ; 43 x 18,5 mm

Suitable with YA-030 & YA-045 and other big size products.



Motion sensor eye can be positioned separately from the card up to a maximum distance of 20-25 cm

The blinking time begins after detecting the last movement.

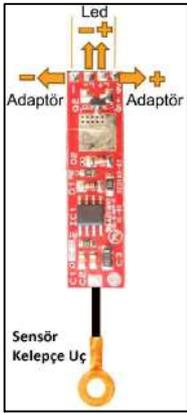**YA-004 D1 Dimmer Touch Sensor**

Operating Range ; 12 V - 3 A

1.stage; %33

2.stage; %66

3.stage; %100

4.stage; %0

Dimensions ; 41 x 11 mm

Power ; 36 W

Suitable for YA-016, YA-019, YA-001, YA-005, YA-009, YA-002 YA-1002 etc

**YA-004 H Motion Sensor**

Operating Range ; 5-30 volt - 4 Amp

Range of flashing ; btw. 5 sec - 5 mn

Sensing distance ; 3 mt


Dimensions ; 40 x 11,5 x 15 (H) mm

Suitable with YA-001 & YA-002 & YA-003 & YA-005 & YA-006 & YA-007 & YA-010 & YA-016 and other big size products.



Motion sensor eye can be positioned separately from the card up to a maximum distance of 20-25 cm

The blinking time begins after detecting the last movement.

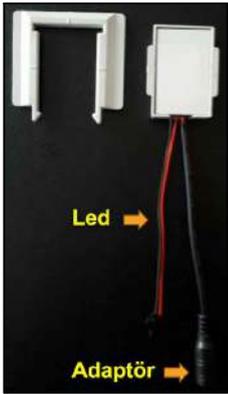**YA-004 D2 Mirror Touch Sensor**

Operating Range ; 12-24 volt - 10 Amp

Sensing distance ; 1 cm

Used in mirror, glass, etc.


Output Current can increased to 20 A

Area for Glass touch sensor is 2-3 mm.

Blue light indicates that the sensor is off, white light indicates that the sensor is on.

Dimensions ; 46 x 30 mm

Suitable with YA-016 & YA-019 & YA-020 & YA-1002

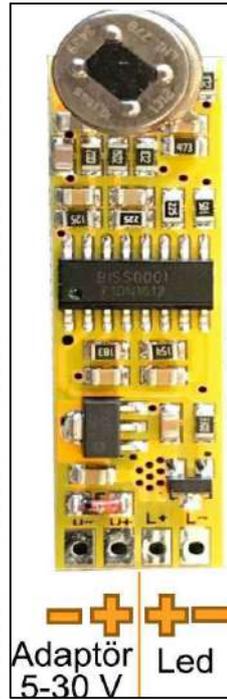**YA-004 D3 Led Driver Protection Device**



Operating Range ; 6-30 volt

Output Current ; 100mA - 1 A

Positioned between driver - led

Dimensions ; 20 x 20 mm

It prevents fuse failure that may occur when the poles are connected incorrectly.

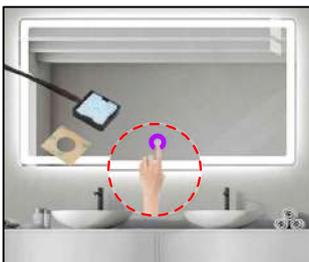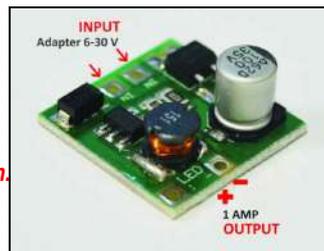**YA-004 D21 Dimmer Touch Mirror Sensor**


Features are the same as the mirror touch.

The light turns on w/ a fingertip touch.

When you touch it for an extended period, dimmer function is activated.

The intensity of the light can be adjusted.

When motion-sensitive lighting is requested in the mirror, YA-004 H2 ON/OFF IR Sensor can be used.

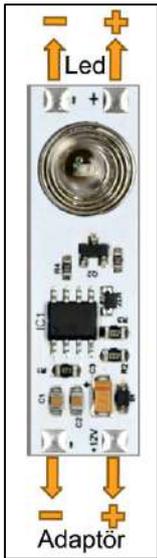

**YA-004 D11 Spring-loaded Dimmer Touch Sensor**


Operating Range ; 9V - 20 V / 3 Amp  
 Power ; 30W  
 Standby Current: 10mA  
 Standby Power Consumption: 0,1 w  
 Operating Temperature ; -20°C~65°C  
 Dimension ; 40 x 10 mm

When you press your finger on the spring, the intensity of the light gradually increases or decreases.

Suitable with YA-016, YA-019, YA-020, YA-1002

**YA-004 H3 Single-Stage IR Motion Sensor**

Operating Range ; 12 V / 3 Amp Power ; 36 W  
 Dimension ; 51 x 10 mm Sensing distance ; 5 cm  
 If there is an obstacle, the light is off;  
 if there is no obstacle, the light is on.

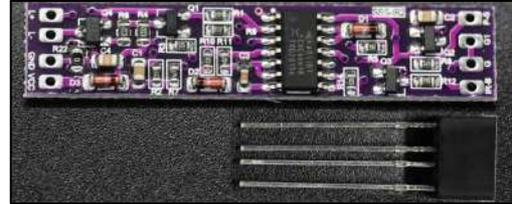

**YA-004 H4 IR Motion Sensor**

Operating Range ; 12 V / 3 Amp Power ; 36 W  
 Dimension ; 51 x 10 mm Sensing distance ; 5 cm  
 If there is an obstacle, the light is off;  
 if there is no obstacle, the light is on.  
 It automatically shuts off after 12 minutes in case of forgetting or power outage.





**YA-004 H2 ON /OFF IR Motion Sensor**

Operating Range ; 12 V / 3 Amp Power ; 36 W  
 Dimension ; 51 x 10 mm  
 Opens with the first movement, closes with the second move.  
 It can be used as a sensor in mirror lighting.





**EDGE / SECTION LIGHTING FOR GLASS AND ACRYLIC**


**YA-011**  
Alu. Led Case

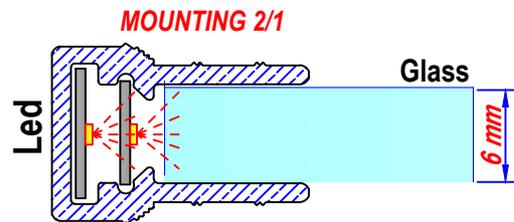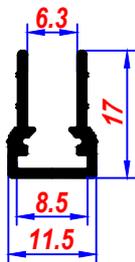


**YS - 925**  
Alu. Led Case

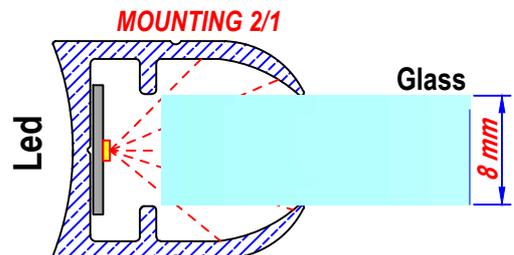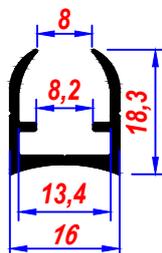

**YA-021**  
PVC Led Case

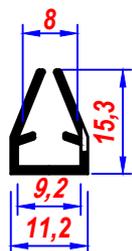


Light Gray, Opal, Transparent

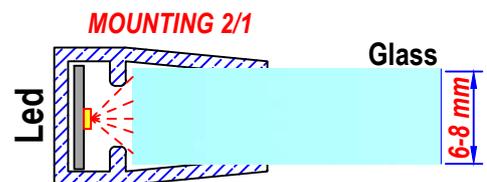


**MINIMAL ECONOMIC, SURFACE MOUNTED ALU. LED PROFILE AND ACCESSORIES**

**NEW YA - 041**

Alu.Led Case




Suitable for 6,4 mm PCB

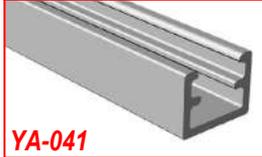


YA-041

**YA-041 C**

P.C. Diffuser




**MOUNTING 2/1**



**SUPER MINI ECONOMY PRODUCT**

YA-041


YA-041 C

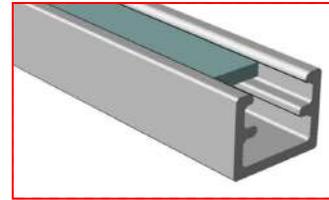


PC.DIFFUSER-ALU.PRF.610 cm

**NEW YA - 032**

Alu.Led Case



Suitable for 8,2 mm PCB

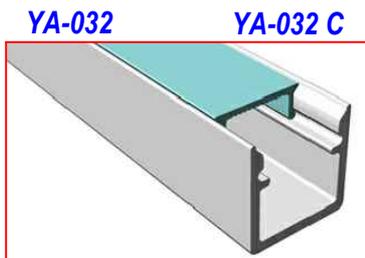

PC.DIFFUSER - ALU.PRF. 610 cm


**NEW**

**YA-032 C**


P.C. Diffuser



Opal-Transparent

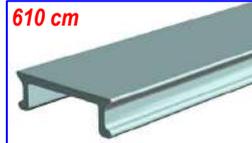

610 cm



**NEW**

**YA-032 T**

Pls. End Cap




**RECESSED FOR LIGHTING COUNTERTOP**




**YA - 019**

Alu.Led Case



Suitable for 11 mm PCB

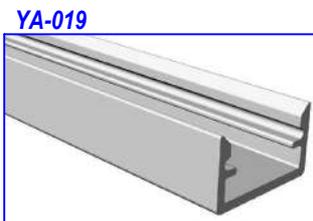


ALU.PRF. 610 cm

**USAGE AREAS;**

*Chandelier-Furniture (Inside cabinet & drawer), Ceramic, Wall, Floor, Stair and decorative surface*

YA-019

YA-019 C

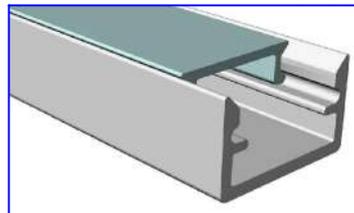

PC.DIFFUSER - ALU.PRF. 610 cm


**NEW**

**YA-019 C**

P.C. Diffuser



Opal-Transparent



YA-019 C 610 cm


**YA-012 D**

Wall Mounting Acces.



STAINLESS STEEL

**MOUNTING 2/1**




**YA-019 T**

Pls. End Cap





Light Gray

**ECONOMIC LED BAR PROFILE**






PC. DIFFUSER - ALU. PRF. 610 cm

**YA 012 ALU. LED CASE & ACCESSORIES**



**INDOOR, MINIMAL DECORATIVE SURFACE MOUNT ALU. LED PROFILE AND ACCESSORIES**




YA-023 B Wall Connection Profile, creates different kinds of minimal linear lighting by using two different PC.Diffuser and mounting accessory.

**USAGE AREAS;**

Chandelier-Furniture (Inside cabinet & drawer), Ceramic, Wall, Floor, Stair and decorative surface

YA-019 T End Cap is suitable for, YA-012 C P.C.Diffuser

**YA-023 B ALU. LED CASE & ACCESSORIES**

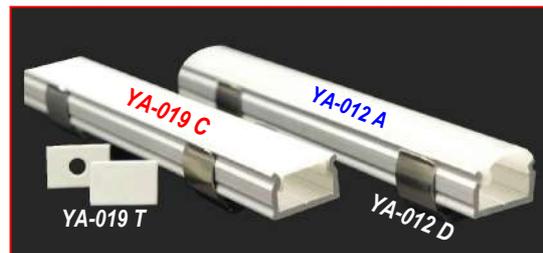

REFRIGERATOR - COLD STORAGE AND WET AREAS

**YA-013**  
P.C.Led Case Diffuser  
9,3  
12,1  
13,3  
IP 67

**YA-013 A**  
Pls.End Cap  
White

MOUNTING




SCALE 2/1  
9,3  
12,1  
13,3  
TRANSPARENT

**YA-012 D**  
Wall Mounting  
2,7  
STAINLESS STEEL

ECONOMIC LED BAR PROFILE

**YA-014**  
Alu.Led Case  
Suitable for 12 mm PCB  
3,2  
12,7  
16,9



PC.DIFFUSER- ALU.PRF. 610 cm

**YA-006 A**  
P.C. Diffuser  
7,1  
Opal - Transparent  
External Mounting

SCALE 2/1  
3,2  
120°  
8,0  
12,7  
16,9

**YA-001 D 1**  
Wall Mounting Acces.



Stainless Steel


**YA-014 T**  
Pls.End Cap  
Light Gray



USAGE AREAS;  
Furniture, Kitchen, Floor, Wall etc.  
Stretch Ceilings  
Concealed Ceiling Lighting  
Economic Led Profile

ECONOMIC LED BAR PROFILE

**YA-015**  
Alu.Led Case  
Suitable for 12-14 mm PCB  
5,4  
14,8  
17



PC.DIFFUSER- ALU.PRF. 610 cm

**YA-006 A**  
PC. Diffuser  
7,1  
Opal - Transparent  
External Diffuser  
MOUNTING 2/1

5,4  
120°  
10,7  
14,8  
17

**AVZ-001 P**  
PC. Diffuser  
16,2  
Opal  
Internal Diffuser  
MOUNTING 2/1

120°  
7,8  
14,8  
17

**YA-015 T**  
Pls.Kenar Tapa  
White  
SUITABLE FOR YA-006 A PC DIF.


**YA-001 D 1**  
Wall Mounting Acces.




Stainless Steel

ECONOMIC LED BAR PROFILE

**NEW YA-026 Y**  
Alu.Led Case  
4  
16,5  
19,5  
Suitable for 14-16 mm PCB




**YA-001 A**  
U PC.Diffuser  
8  
18,5




Total Height ; 12 mm

**YA-001 C**  
Straight PC.Dif.  
16,4



Total Height ; 4,5 mm

**YA-001 E**  
Low Camber PC.Dif.  
3,2  
18



Total Height ; 6,9 mm


**YA-001 F**  
Mid Camber PC.Dif.  
6,6  
18




Total Height ; 11 mm


PC Diffuser – Aluminum Profiles; 610 cm – Opal / Transparent


**SMALL (8 x 13.5 MM) ECONOMICAL RECESSED ALUMINUM LED PROFILE & ACCESSORIES**

**YA-020**  
Alu.Led Case  
  
 Suitable for 11,5 mm PCB

**YA-019 C**  
P.C. Diffuser  
  
 Opal-Transparent-Black

**Y-019 C**  
  
 PC. Diffuser 610 cm




**ECONOMIC RECESSED LED PRF.**  
**YA-020 ALU.** **Y-019 C PC.**  
  
 PC.DIFFUSER-ALU.PRF. 610 cm

**YA-020 T**  
Pls. End Cap  
  
 Light Gray


**Application Areas: Furniture, Kitchens, Flooring, Walls**

**Suitable for the furniture industry, especially for in-cabinet and drawer interior lighting**

**YA-002**  
Recessed Alu. Led Case  
  
 Suitable for 12 mm PCB


**YA-002 A**  
P.C. Diffuser  
  
 Opal-Transparent

**YA-002 P**  
P.C. Diffuser  
  
 Opal-Transparent

**YA-002 ALU.** **Y-002 A-P PC.**  
  
 PC.DIFFUSER-ALU.PRF. 610 cm


**PC.DIFFUSER-ALU.PRF. 610 cm**

**IN-CABINET APPLICATION**

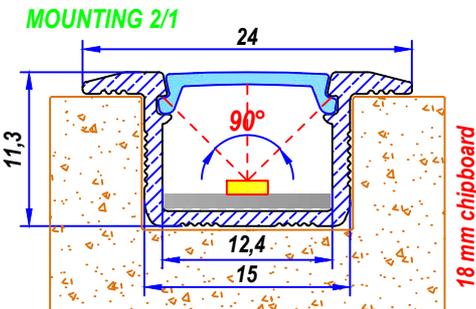


**YA-002 B**  
Plastic End Cap  
  
 Light Gray

**Application Areas: Furniture, Kitchens, Flooring, Walls**

**YA-1002**  
Recessed Alu. Led Case  
  
 Suitable for 16 mm PCB


**YA-1002 A**  
P.C. Diffuser  
  
 Opal-Transparent




**PC.DIFFUSER 610 cm**

**YA-1002 T**  
Plastic End Cap  
  
 Light Gray

**YA-1002 ALU.** **Y-1002 A PC.**

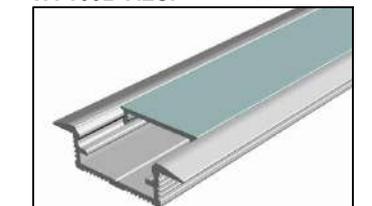







**PC.DIFFUSER-ALU.PRF. 610 cm**

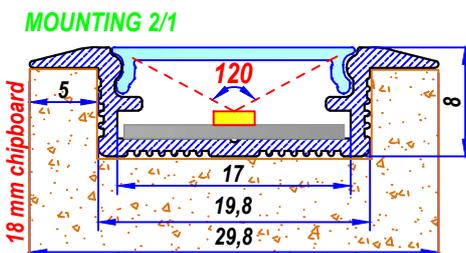


**Decorative Recessed Led Profile**  
**Application Areas: Furniture, Kitchens, Flooring, Walls**  
**Low Height, H=8 mm**

All cutting dimensions and surface coatings can be done according to requirements




RECESSED ALUMINUM LED PROFILE & ACCESSORIES

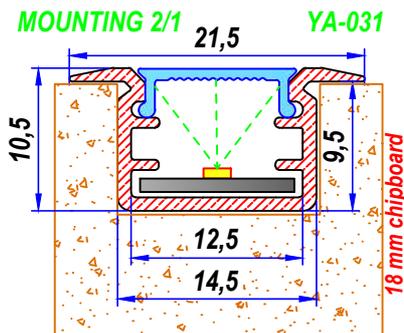

**APPLICATION AREAS:**  
suitable for various surfaces including furniture (in-cabinet) ceramic, walls, floors, stairs, wood decorative, economical, compact recessed products






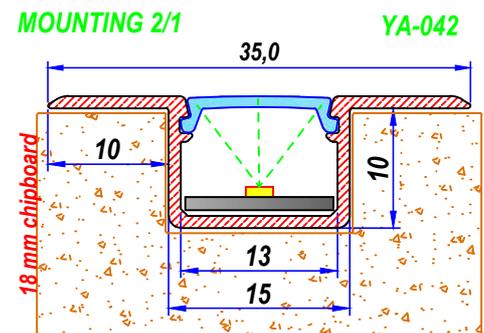


RECESSED ALUMINUM LED PROFILE & ACCESSORIES

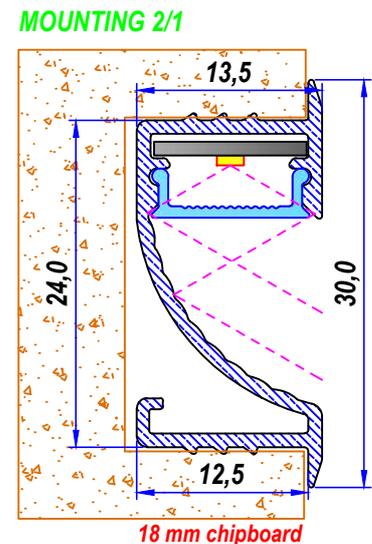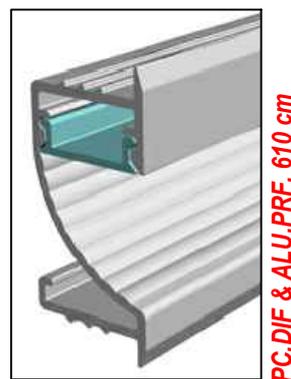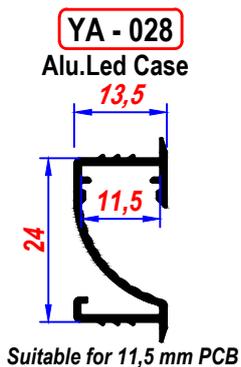


**APPLICATION AREAS:**  
suitable for various surfaces including furniture (in-cabinet or drawer) ceramic, walls, floors, stairs, wood decorative, economical, compact recessed, non-visible light source (indirect lighting)

All cutting dimensions and surface coatings can be done according to requirements

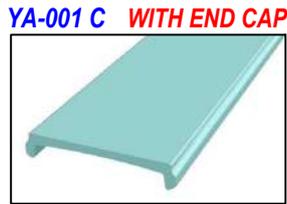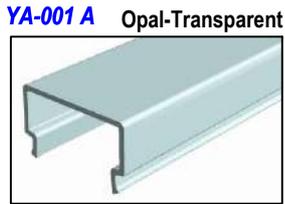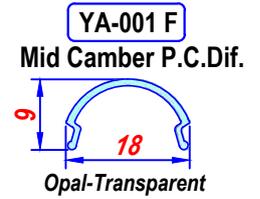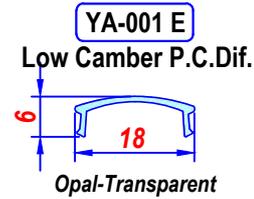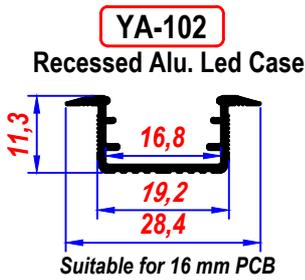


**PC.DIFFUSER-ALU.PRF. 610 cm**


**PC.DIFFUSER, OPAL-TRANSPARENT**

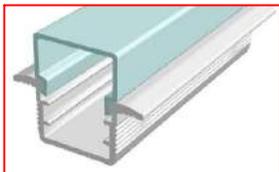


**YA-102 YA-001 A**

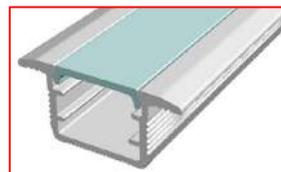

**YA-102 YA-001 C**

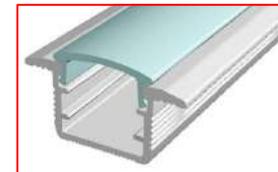

**YA-102 YA-001 E**

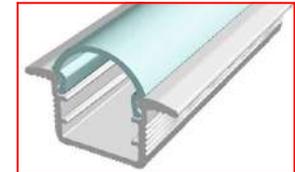

**YA-102 YA-001 F**

**Decorative Recessed Led Profile**




Usage Areas; Furniture, Kitchen, Floor, Wall etc.

**YA-102 T**  
Plastic End Cap



Light Gray

Suitable for YA-001 C PC

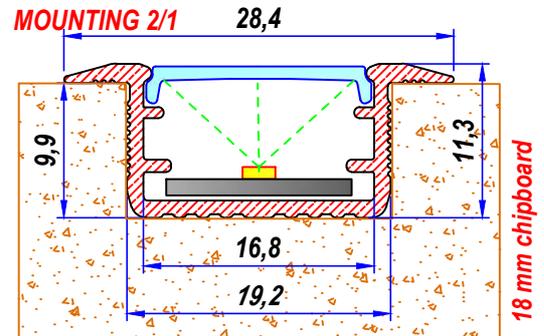

**YA-102 ALU. LED CASE APPLICATION**





**YA-102 ALU. LED CASE and ACCESSORIES**




All cutting dimensions and surface coatings can be done according to requirements


**25 MM RECESSED ALUMINUM LED PROFILE & ACCESSORIES**

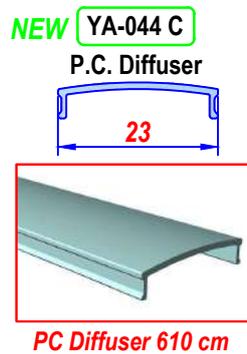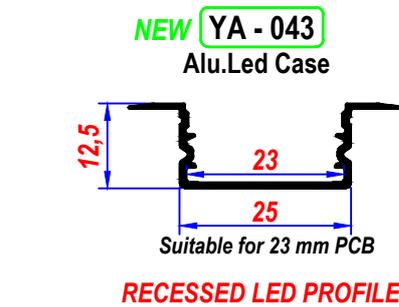


ALU. Prf.- PC Diffuser 610 cm

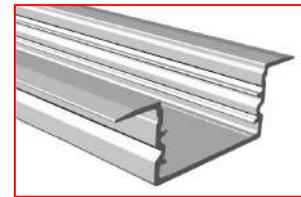


YA-043 Alu. YA-044 C Diffuser

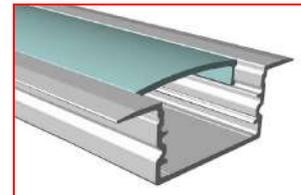


Plastic end caps and wall mounting accessories can also be used with YA - 043 aluminum profile.  
New, economical recessed product suitable for use on surfaces such as furniture (under cabinet), drywall, walls, and floors.

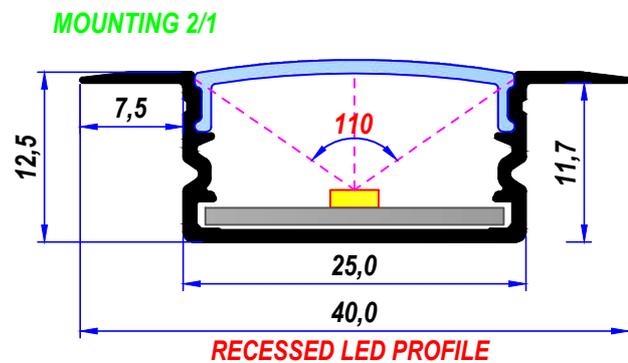


**25 MM SURFACE-MOUNT ALUMINUM LED PROFILE & ACCESSORIES**

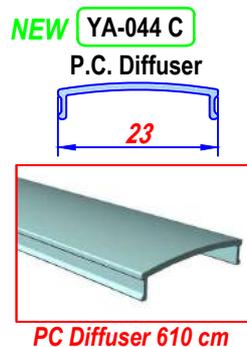


ALU. Prf.- PC Diffuser 610 cm

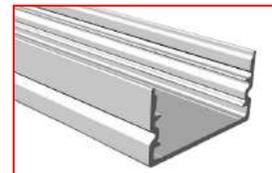

YA-044 Alu. YA-044 C Diffuser

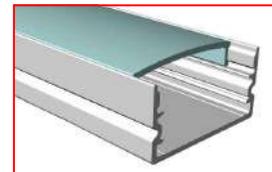

Plastic end caps and wall mounting accessories can also be used with YA - 044 aluminum profile.

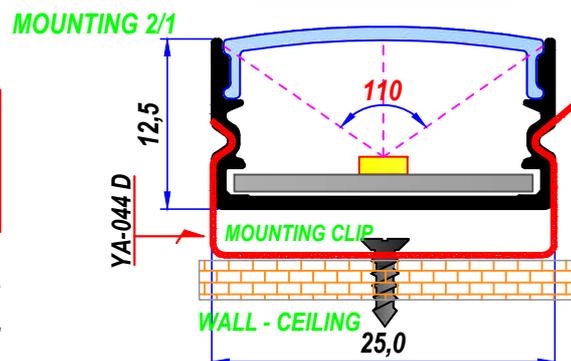


All cutting dimensions and surface coatings can be done according to requirements


**ECONOMIC PLASTIC RECESSED AND SURFACE MOUNTED LED LIGHTING PROFILE**

**NEW YP - 001**

Plastic Recessed Led Prf.



**IP 66 MOUNTING**



**SOFT**



18 mm chipboard application  
Flexible in all directions.  
100 mt Rolled - OPAL


**APPLICATION AREAS**

Suitable for use in furniture, cabinets, ceramic surfaces, walls, floors, stairs, wooden applications. this economical product features a soft finish and is manufactured for recessed installation. suitable for IP66 applications.


**NEW**

**YP - 002**

Soft Flexible Led Profile  
**IP 66**

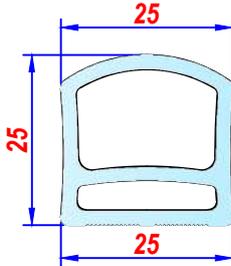

Flexible in all directions.





100 mt Rolled - OPAL

**APPLICATION AREAS**

NEW IP66 product suitable for both indoor and outdoor use. Suitable for applications such as walls and floors. This economical product features a soft finish and is manufactured for surface-mount installation.

**GP-001 P**

Plastic Recessed Led Prf.  
Flanged - Open




**HARD**  
PROFILE 305 cm - OPAL



18 mm chipboard application

**NEW GP-001 K**

Plastic Recessed Led Prf.  
Flanged - Open




**HARD**  
PROFILE 305 cm - OPAL




18 mm chipboard & surface mounted application

**GP-002 P**

Plastic Recessed Led Prf.  
Flanged - Open



**MOUNTING**




**HARD**  
PROFILE 305 cm - OPAL



18 mm chipboard application

**GP-030**

Plastic Recessed Led Prf.




**HARD**  
PROFILE 305 cm - OPAL




18 mm chipboard application

**GP-020**

Plastic Recessed Led Prf.  
Flanged - Close



**MOUNTING**



**HARD**  
PROFILE 305 cm - OPAL



18 mm chipboard application



**NEW**

**GP-021**

Plastic Recessed Led Profile



**MOUNTING 2/1**




**HARD**

Suitable for 5 mm Led Strip Application

New product suitable for; kitchens, furniture, cabinets, drawers. Suitable for IP66 applications on wet floors.


**GP-031**

Plastic Recessed Led Prf.  
Headboard Lighting

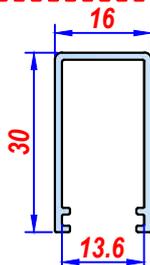

**HARD**  
PROFILE 305 cm - OPAL

**MOUNTING**

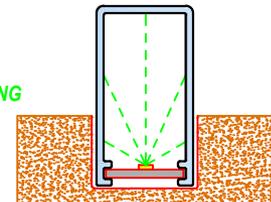


18 mm chipboard application

FLEXIBLE CO-EX SILICONE LED LIGHTING PROFILES




NEW WITH LED

**YPL-4x8**  
Silicone Neon Led  
IP 66-24 V



Suitable for YA-036  
Soft and Flexible



APPLICATION


Cuttable every 5 cm  
3000-4000 K (Kelvin)  
Perforated / Non-perforated,  
50 mt / Rolled




WATERPROOF

NEW WITH LED

**YPL-6x12**  
Silicone Neon Led  
IP 66-24 V



Suitable for YA-035  
Soft and Flexible



APPLICATION


Cuttable every 5 cm  
3000-4000 K (Kelvin)  
Perforated / Non-perforated,  
50 mt / Rolled




WATERPROOF

NEW WITH LED

**YPL-8x8**  
Silicone Neon Led  
IP 66-24 V



Suitable for YA-032  
Soft and Flexible



APPLICATION


Cuttable every 5 cm  
3000-4000 K (Kelvin)  
Perforated / Non-perforated,  
50 mt / Rolled




WATERPROOF

NEW WITH LED

**YPL-8x16**  
Silicone Neon Led  
IP 66-24 V



Suitable for YA-018  
Soft and Flexible



APPLICATION


Cuttable every 5 cm  
3000-4000 K (Kelvin)  
Perforated / Non-perforated,  
50 mt / Rolled




WATERPROOF

NEW WITH LED

**YPL-10x10**  
Silicone Neon Led  
IP 66-24 V



Suitable for YA-037 and YA-038  
Soft and Flexible



APPLICATION


Cuttable every 5 cm  
3000-4000 K (Kelvin)  
Perforated / Non-perforated,  
50 mt / Rolled




WATERPROOF

NEW

**YP-12x10**  
Silicone Tube



Suitable for YA-039  
Soft and Flexible



APPLICATION


LED-free. With internal pull string  
for pulling the LED strip through.




End caps: perforated /  
non-perforated  
100 mt / Rolled

NEW

**YP-12x12**  
Silicone Tube



Suitable for YA-038  
Soft and Flexible



APPLICATION


LED-free. With internal pull string  
for pulling the LED strip through.



End caps: perforated /  
non-perforated  
100 mt / Rolled

NEW

**YP-8x8 G**  
Silicone Tube



100 mt / Rolled


Soft, Recessed Product



Opal diffuser with white housing.


NEW

**YP-10x10 G**  
Silicone Tube



100 mt / Rolled


Soft, Recessed Product



Opal diffuser with white housing.


NEW

**YP-15x10 G**  
Silicone Tube



100 mt / Rolled

Soft, Recessed Product



Opal diffuser with white housing.

FLEXIBLE CO-EX SILICONE LED LIGHTING PROFILES

**NEW**  
**YP-16x16 U**  
Silicone Tube  
16  
16  
IP 66

**NEW**  
**YP-16x16D**  
Alu. Wall Connection Prf.  
14  
17,6  
Length; 100 cm  
YP-16x16 D  
APPLICATION

**YP-16x16 U**  
↓  
**WATERPROOF**  
Soft product - 100 mt Rolled



**NEW**  
**YP-20x20U**  
Silicone Tube  
20  
20  
IP 66

**NEW**  
**YP-20x20D**  
Alu. Wall Connection Prf.  
YP-20x20 U  
22  
Length; 100 cm  
Soft product - 100 mt Rolled

**NEW**  
**YP-20x20Z**  
Silicone Tube  
20  
20  
IP 66

**YP-20x20Z**  
Soft product - 100 mt Rolled  
APPLICATION  
FLOOR  
**SUITABLE FOR FLOOR**

**NEW**  
**YP-30x20Z**  
Silicone Tube  
19,5  
30  
IP 66

**YP-30x20Z**  
APPLICATION  
Soft product - 100 mt Rolled  
FLOOR  
**SUITABLE FOR FLOOR**

**NEW**  
**YP-25x10 G**  
Silicone Tube  
11,5  
25  
IP 66

Soft product - 100 mt Rolled  
APPLICATION  
**SUITABLE FOR FLOOR**


**NEW**  
**YP-25x17**  
Silicone Tube  
17  
25  
IP 66

**NEW**  
**YP-25x17D**  
Alu. Wall Connection Prf.  
14,7  
26,4  
Length; 100 cm

**YP-25x17**  
↓  
**WATERPROOF**  
YP-25x17 D  
APPLICATION


**YP-16x16 U**  
↓  
**WATERPROOF**  
Soft product - 100 mt Rolled

**NEW**  
**YP-14x4**  
Silicone Diffuser-Housing  
14  
4  
0,5  
IP 66  
Transparent  
Without Tape



100 mt Rolled

**NEW**  
**YP-14x4 B**  
Silicone Diffuser-Housing  
14  
4  
Transparent  
With Double-sided Tape

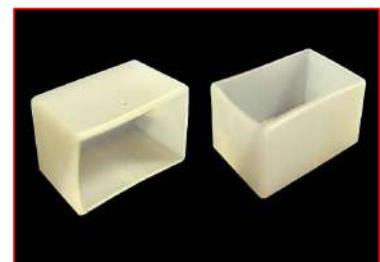


Silicone end caps with hole - without hole


OUTDOOR ALUMINUM PROFILES FOR LED NEON & ROPE LIGHT APPLICATIONS

**YA-018**

Alu. Led Case for Neon


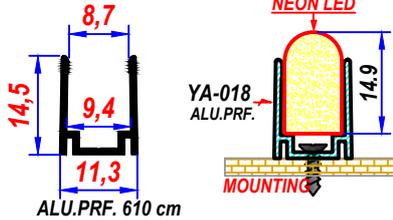


YA-018




INSTALLATION ON FLOOR / WALL / CEILING / FURNITURE

YA-035



**YA-035**

Alu. Led Case for Neon




ALU.PRF. 610 cm


NEW

**YA-036**

Alu. Led Case for Neon


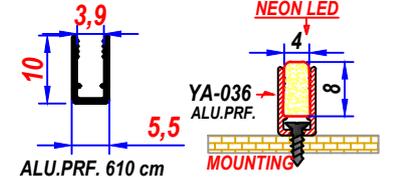


YA-036



INSTALLATION ON FLOOR / WALL / CEILING / FURNITURE


YA-037



YENİ

**YA-037**

Alu. Led Case for Neon




ALU.PRF. 610 cm


NEW

**YA-038**

Alu. Led Case for Neon


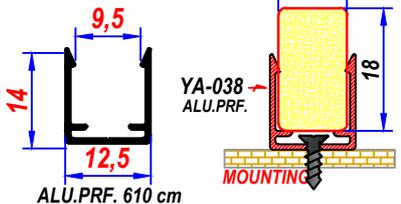


YA-038



INSTALLATION ON FLOOR / WALL / CEILING / FURNITURE


YA-039



NEW

**YA-039**

Alu. Led Case for Neon




ALU.PRF. 610 cm


NEW

**YA-040**


Alu. Led Case for Neon



YA-040




INSTALLATION ON FLOOR / WALL / CEILING / FURNITURE



NEON LED ve ALU. CASE



NEON LED ve ALU. CASE

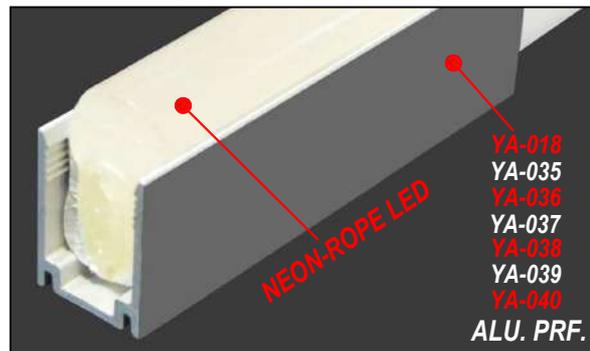


- YA-018
- YA-035
- YA-036
- YA-037
- YA-038
- YA-039
- YA-040
- ALU. PRF.

All cutting dimensions and surface coatings can be done according to requirements

**INDOOR DECORATIVE LIGHTING PROFILES**

**YA-017**  
Alu.Led Case



**YA-017 A**  
P.C. Diffuser



Opal - Transparent

**YA-017 B**  
Alu.Laser Cut End Cap



**YA-017 Alu.Prf. and PC Diffuser**




**PC.DIFFUSER-ALU.PRF. 610 cm**



**STAIRS LIGHTING APPLICATION**

18 mm CHIPBOARD APPLICATION

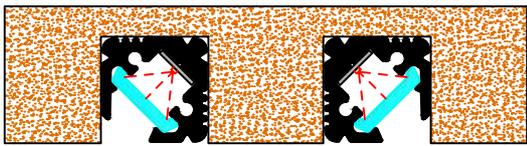


PCB Width : 6,4 mm


**INDOOR SURFACE-MOUNTED LED PROFILES & ACCESSORIES**

**YA-034**

Alu. Led Case



**YA-034**



**APPLICATION AREAS**

Decorative, cost-effective surface-mounted product, suitable for use on surfaces such as furniture, walls, floors, stairs, and wood. Matching end cap for the product, coming soon.

**YA-045 A**


PC Diffuser



Opal - Transparent




**PC.DIFFUSER 610 cm**



**PC.DIFFUSER-ALU.PRF. 610 cm**


**YA-034 D**

Wall Fixing Bracket



Stainless Steel

**MOUNTING 2/1**

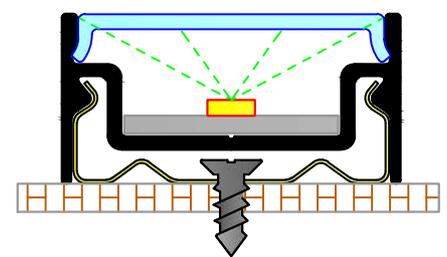

**Wall / Floor / Furniture**

**ALUMINIUM FLAT LED PROFILE FOR LED STRIPS**

Aluminum profiles designed for use with adhesive LED strip lights for 10, 12, 15, 16 mm widths.

**YA - 025**

Alu.Led Case



Suitable for 12 mm PCB



**YA-025 ALU. PRF. 610 cm**

**YA-025 A**

Alu.Led Case




Suitable for 15 mm PCB



**YA-025 A ALU. PRF. 610 cm**

**YA-025 B**

Alu.Led Case



Suitable for 10 mm PCB




**YA-025 B ALU. PRF. 610 cm**

All cutting dimensions and surface coatings can be done according to requirements

**45° L CORNER ALUMINUM PROFILE & ACCESSORIES**


YA-016



ALU.PRF. 610 cm

YA-016


Alu.Led Case



L - ANGLE Profile  
Suitable for 12-14 mm PCB

YA-016 A

Alu. Wall Mounting Acces.



YA-016 A



Length; 2 cm - 610 cm

YA-016 B



P.C. DIFFUSER 610 cm

YA-016 B


Oval P.C. Diffuser



Opal - Transparent


YA-016 C

L - P.C. Diffuser



Opal - Transparent

YA-016 C



P.C. DIFFUSER 610 cm

YA-016 B 1

Plastic End Cap



Light Gray

**USAGE AREAS;**

Where 45 degree light is required such as;  
under cabinet lighting, drawer, floor,  
wall and used in corner joints.

YA-016 C 1


Plastic End Cap



Light Gray

**YA-016 ALU. LED CASE and ACCESSORIES**

YA-016 YA-016 A YA-016 B




PC.DIFFUSER-ALU.PRF. 610 cm  
Suitable for 12-14 mm PCB



YA-016 ALU LED CASE


YA-016 YA-016 A YA-016 C



PC.DIFFUSER-ALU.PRF. 610 cm  
Suitable for 12-14 mm PCB

**KITCHEN COUNTER TOP 45° ANGEL LIGHTING**

**OVAL DIFFUSER APPLICATION**

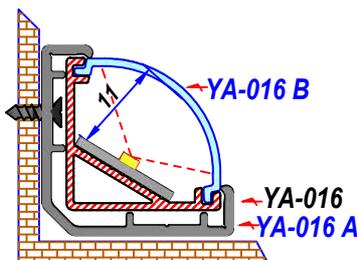


WALL-FLOOR-FURNITURE



SUITABLE FOR ALL SENSORS





**L - DIFFUSER APPLICATION**

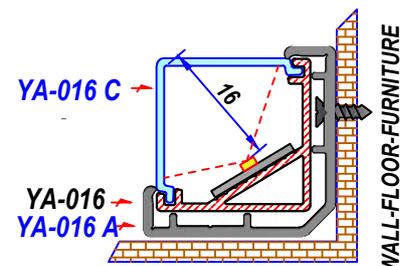

WALL-FLOOR-FURNITURE






All cutting dimensions and surface coatings can be done according to requirements

**MINI, 45° L CORNER ALUMINUM PROFILE & ACCESSORIES**

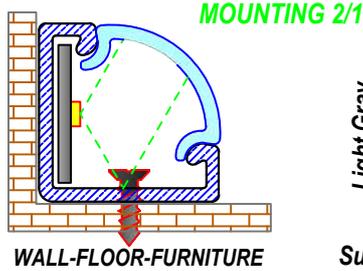




**USAGE AREAS;**  
Furniture (Inside cabinet & drawer),  
Ceramic, Wall, Floor, Stair  
Suitable for use as recessed

**MAXI, 45° L CORNER ALUMINUM PROFILE & ACCESSORIES**

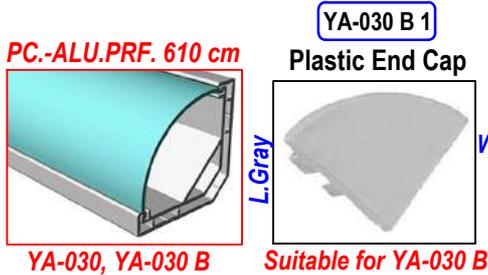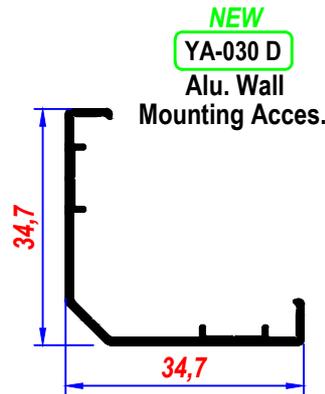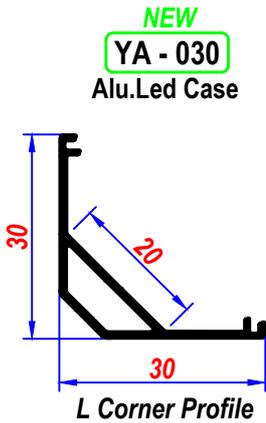


**USAGE AREAS;**  
Where 45 degree light is required such as;  
under cabinet lighting, drawer, floor,  
wall and used in corner joints.

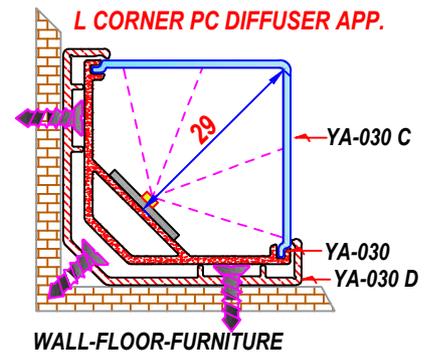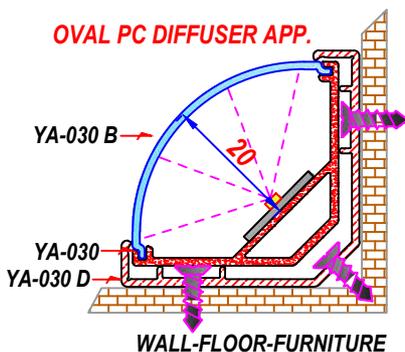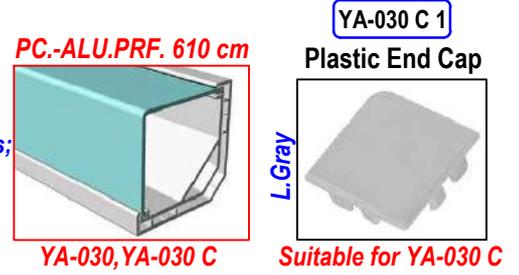

**DECORATIVE SURFACE MOUNTED LED PROFILE AND ACCESSORIES**

<p><b>YA-1006</b> Alu. Led Case</p> <p>Suitable for 12 mm PCB and Strip LEDs Easy mounting with double sided tape</p>	<p><b>YA-001 C</b> PC. Diffuser</p> <p>Opal-Transparent</p>	<p><b>YA-001 E</b> Low Camber P.C. Diffuser</p> <p>Opal-Transparent</p>	<p><b>YA-1006 E1</b> Alu. Laser End Cap</p> <p>Suitable for YA-001 E PC</p>
---	---	---	---

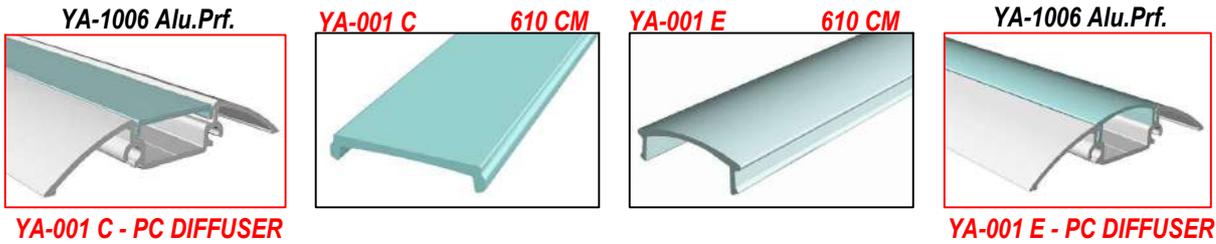


<p><b>YA-1005</b> Alu. Led Case</p> <p>Suitable for 12 mm PCB</p>	<p><b>YA-002 A</b> PC. Diffuser</p> <p>Opal-Transparent</p>	<p><b>YA-1005 A</b> Wall Fixing Bracket</p>	<p><b>YA-1005 T</b> Alu. Laser End Cap</p> <p>Suitable for YA-002 A PC The product is installed using adhesive.</p>
<p><b>MOUNTING 1/1</b></p> <p>12 mm lik PCB uygun Decorative Surface-Mount LED Profile</p>	<p>YA-002 A</p> <p>Application areas: furniture, kitchen, floor, wall PC.DIFFUSER-ALU.PROF. 610 cm</p>	<p>YA-1005 A</p>	<p>YA-1005 YA-002 A YA-1005 A</p>

**VEHICLE TOP MOUNTED LED PROFILE AND ACCESSORIES**

<p><b>YA-055</b> Alu. Led Case</p> <p>Suitable for outdoor use</p>	<p><b>YA-055 A</b> Plastic End Cap – Gasket</p> <p>Color : Black</p>	<p><b>YA-055 B</b> Alu. Laser End Cap</p>	<p><b>YA-055 C</b> Alu. Laser End Cap</p> <p>Laser-Cut – With Tabs</p>
<p><b>YA-016 B</b> PC. Diffuser</p> <p>Opal-Transparent</p>	<p><b>YA-LS 1</b> Polycarbonate Lens</p> <p>transparent</p> <p>Beam Angle 45° Ø 21 mm, H=14 mm</p> <p>LENS: Suitable for use in wall washer, projector, street lighting fixture housings</p>	<p><b>YA-055 Aluminum LED Profile &amp; Accessories</b></p> <p>YA-055 ALU.PROF. 610 cm</p> <p>GASKET YA-055 C YA-055 B</p> <p>Ideal for traffic vehicles, emergency warning systems, and linear lighting applications.</p>	


**IN-VEHICLE & CABINET INTERIOR LIGHTING PROFILE AND ACCESSORIES**

**YA-093**  
Alu.Led Case

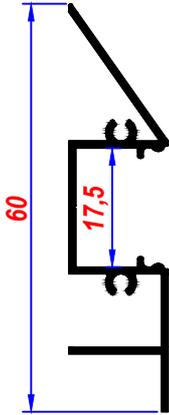


16 mm PCB suitable

**YA-093 Alu. Profile**

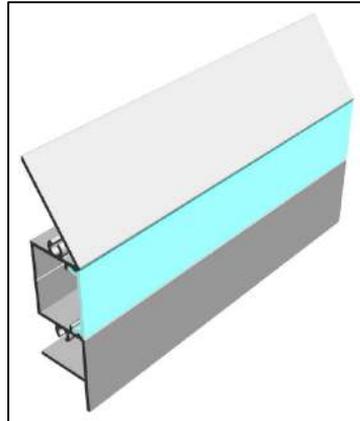

Plastic End Cap  
will be released soon

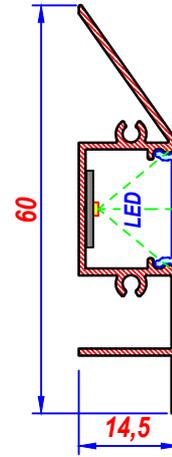


**YA-093 T**  
Alu.Laser End Cap



**YA-1002 A**  
P.C. Diffuser  
Opal - Transparent



**Y-1002 A** Opal - Transparent




P.C.DIFFUSER 610 cm

**Led skirting board**  
Usage Areas; Minibus, Midibus,  
Autobüs, vipauto, Floor


Usage Areas;  
In-vehicle lighting & Led skirting board

**YA-094**  
Alu.Led Case

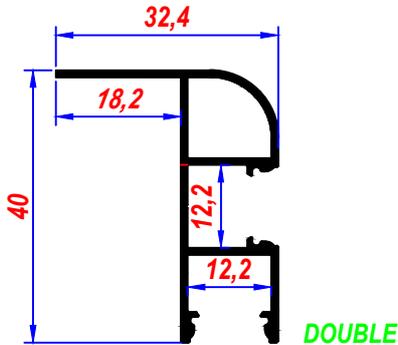


12 mm PCB & Led Strip are suitable

**YA-094 Alu. Profile**




**YA-019 C**  
PC.Diffuser








**YA-019 C** Opal - Transparent


Double Sided Led Lighting

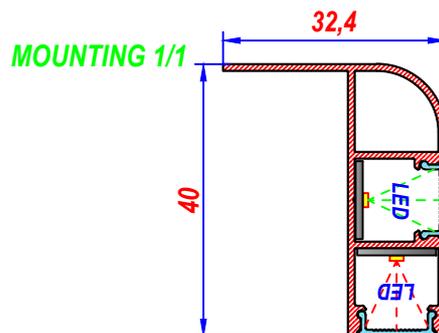

All cutting dimensions can be done according to requirements






SUITABLE FOR LINEER APPLICATIONS



SUITABLE FOR YA-057 / YA-058



All cutting dimensions can be done according to requirements



YA-062 MOUNTING



**YA-062 A**  
Plastic End Cap




YA-063



**YA-063 A**  
Plastic End Cap




**YA-061 B**  
PC. Diffuser




**MOUNTING**





Suitable for YA 061-YA 063-YA 200  
Opal-Transparent

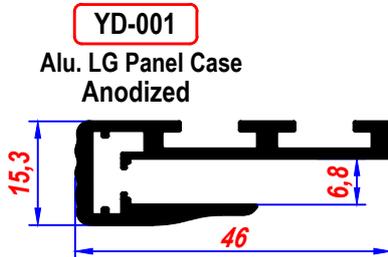

**YD-001 A**  
Alu. Prf.

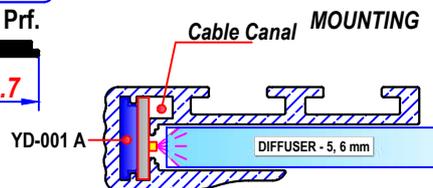


**YD-001 MOUNTING**

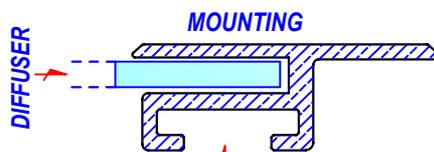


Connection field for 45° angle cutting  
CORNER CONNECTOR IS AVAILABLE

**YD-002 MOUNTING**






**MOUNTING**

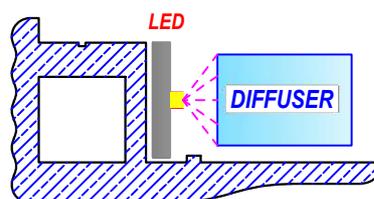

**YD-006 MOUNTING**




All cutting dimensions can be done according to requirements

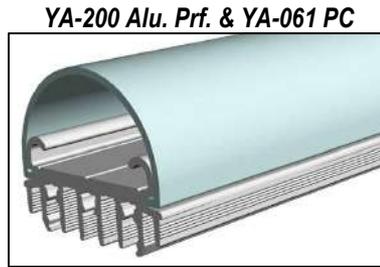



ALU. PRF. 610 cm

*More functional than similar  
Three different diffuser options  
Three different laser end cap options  
Well designed product with high cooling capacity*




Suitable for YA 061-YA 063-YA 200



**YA-061 B** Opal-Transparent




**YA-001 A** Opal-Transparent



**YA-001 F** Opal-Transparent




**YA-200** **YA-061 B**




ALU.PRF. - PC. DIF. 610 cm

**YA-200** **YA-001 A**



ALU.PRF. - PC.DIF. 610 cm


**YA-200** **YA-001 F**



ALU.PRF. - PC.DIF. 610 cm



**ALU.PRF. - PC. DIFFUSER APPLICATION**  
**YA-061 B, YA-001 A, YA-001 F**

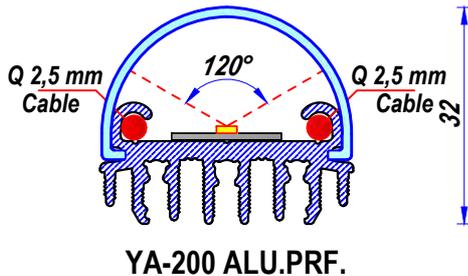


**YA-200 ALU.PRF. AND ACCESSORIES**




*All cutting dimensions and surface coatings can be done according to requirements*


**LED LIGHTING HANGER PROFILES AND ACCESSORIES**

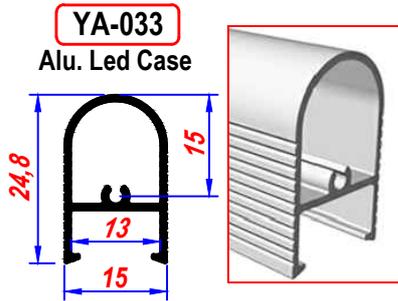

**MOUNTING**

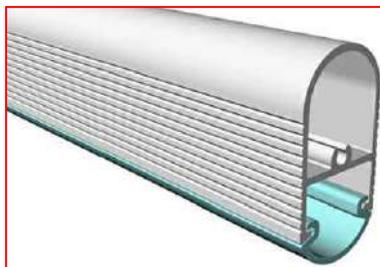

PC.DIFFUSER-ALU.PRF. 610 cm



Aluminium



Zamak

**LED LIGHTING, SENSOR-CONTROLLED HANGING SYSTEM (FINISH PRODUCT)**

It is prepared in requested dimensions with hanger flanges between 38-130 cm

- RDM 97-40** LIGHT LANGER PIPE-WITH BATTERY 40 cm
- RDM 97-60** LIGHT LANGER PIPE-WITH BATTERY 60 cm
- RDM 97-80** LIGHT LANGER PIPE-WITH BATTERY 80 cm
- RDM 97-100** LIGHT LANGER PIPE-WITH BATTERY 100 cm
- RDM 97-120** LIGHT LANGER PIPE-WITH BATTERY 120 cm
- RDM 97-140** LIGHT LANGER PIPE-WITH BATTERY 140 cm



**CONTACT US FOR DIFFERENT LENGTHS**






- \* Led lighting systems provide good lighting compared to ordinary lighting systems and maintain their brightness for many years.
- \* Due to these features, they save a lot of energy compared to ordinary lighting systems.
- \* For those who do not want an electrical connection, battery-powered lighting is the ideal solution.
- \* The light turns on when the door is opened (detects movement) thanks to the motion-sensitive sensor inside. When the door is closed, the light turns off automatically after 30 seconds.

All cutting dimensions and surface coatings can be done according to requirements

**NEW FURNITURE HIDDEN WITH LED HANDLE -  
SHELF PROFILE AND ACCESSORIES**


**NEW MD-685 B Aluminum Hidden L-Handle  
Dual-Sided LED Handle**

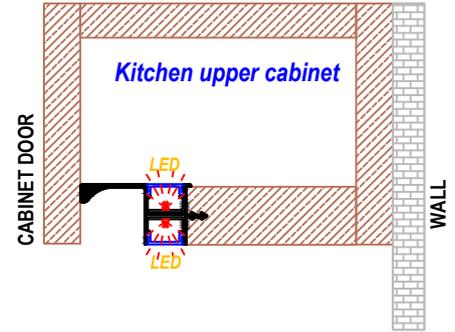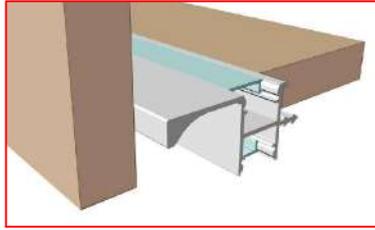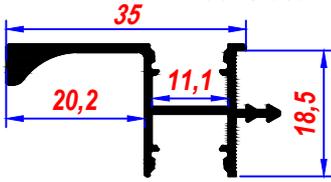

**YA-019 C  
PC. Diffuser**




**NEW MD-685 A Single-Sided  
Led Handle**

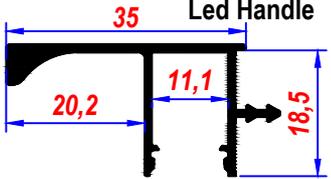

*In kitchens: for countertop, backsplash (counter wall) and toe-kick (base) lighting applications,  
Both handle profile with double-sided LED Case,  
Easy installation with snap-fit wedge system for 18 mm chipboard panels.*


**MD-687 B**

**Alu. Concealed Handle  
With Led Case**

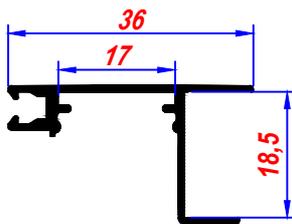


*Suitable for 16 mm PCB*

**MD-687 B**

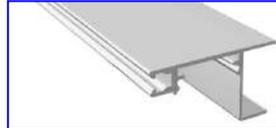


*ALU. PRF. 610 cm*

**YA-1002 A Opal-Transparent**

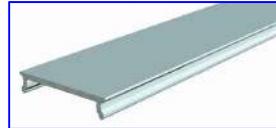

*PC DIFFUSER 610 cm*

**Both concealed handle and led lighting profile**

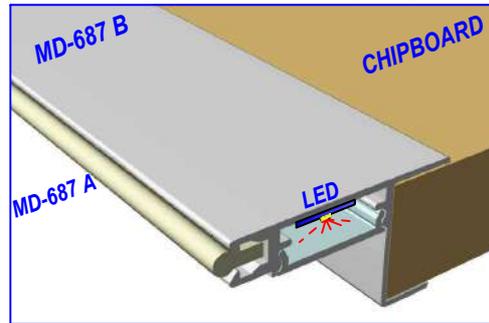

*ALU. PRF. 600 cm - Alu. Prf. used horizontally*

**YA-1002 A**

**PC. Diffuser**




**MD-687 A**

**Impact  
Rubber Strip**




- \* In kitchens, counter top, counter wall, under counter (base) lighting,
- \* Easy installation with 18 mm close - fit chipboard.

**DETAIL OF COUNTER TOP**

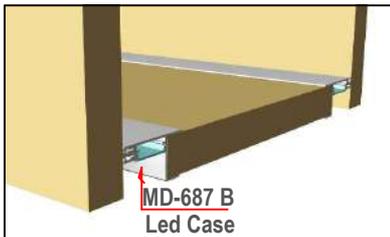


**Above Countertop**

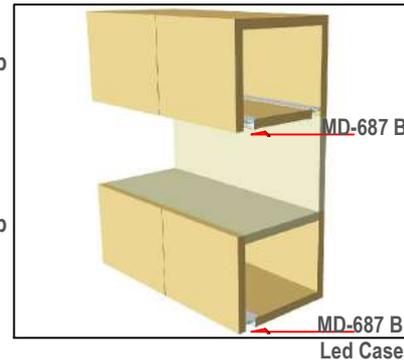


**Under Countertop**

**MOUNTING  
SECTION**

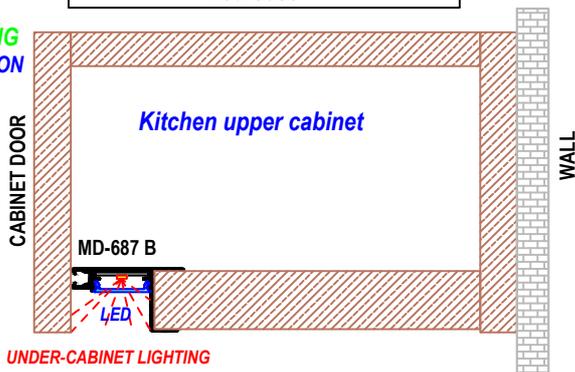



**UNDER-CABINET LIGHTING**

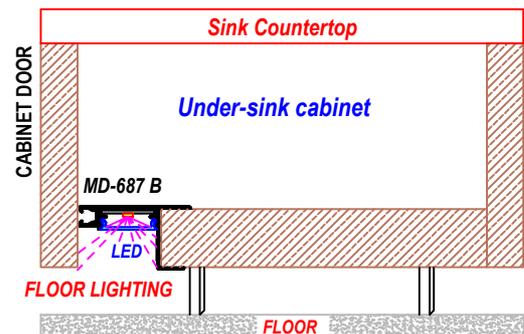

**FLOOR LIGHTING**


**NEW** GO-25

Alu. Led Shelf Glass Case

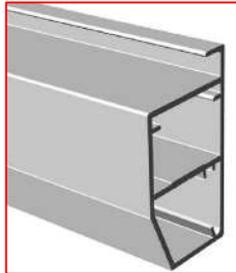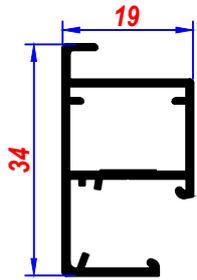


YA-019 C

PC. Diffuser




Opal - Transparent

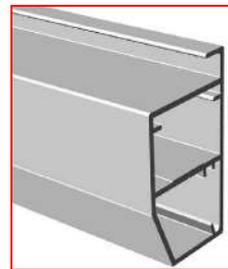



**NEW** GO-26

Alu. Shelf Glass Case

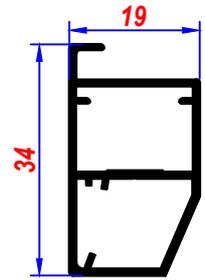

- \* The front part of the shelf uses the GO-25 led housing, while the remaining edges are preferred with the GO-26 closed housing.
- \* The tempered glass used in the product is installed into the channel inside the aluminum frame.
- \* An optional sensor system can be applied on the product (analog motion sensor).
- \* Connection can be made using a shelf bracket or fastener.
- \* Suitable for shelf applications in kitchens, bathrooms and living rooms (direct wall mounting), as well as inside wardrobes / dressing rooms.

**MOUNTING**

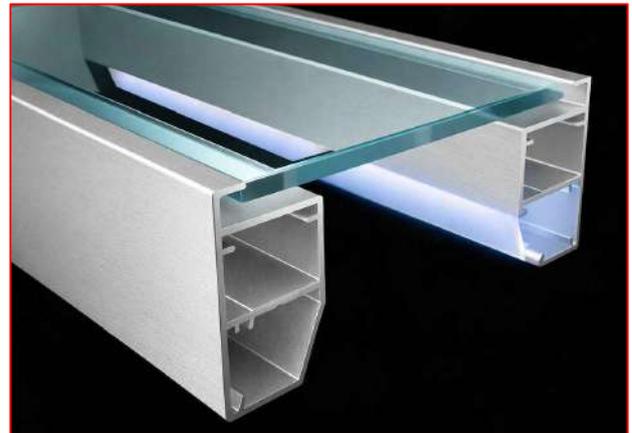

YA - 025

Alu. Led Slider



KB-201

Plastic Corner





GO-25RP

Metal Shelf Holder

Custom frames with glass can be assembled according to requirements

LED HIDDEN HANDLE PROFILE AND ACCESSORIES

**MD-688 LD**  
Aluminum Led Hidden Handle Profile

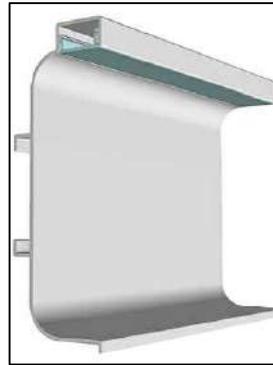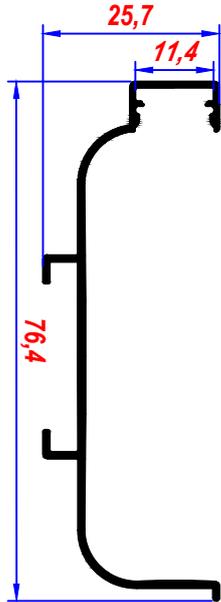


ALU.PRF.-PC. PRF 610 mm


**MD-686 A** Mounting Apparatus



**YA-019 C**  
PC. Diffuser



Opal - Transparent

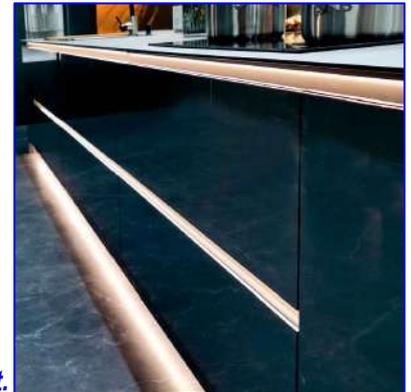


It is used in kitchen counter and lower cabinet doors.  
**Led Handle detail is not visible.**  
When you open the cabinet door, it illuminates the inside of the cabinet.

HAND-RAIL PROFILE

**YA-MK 01**

Alu. Led Hand-Rail Prf.

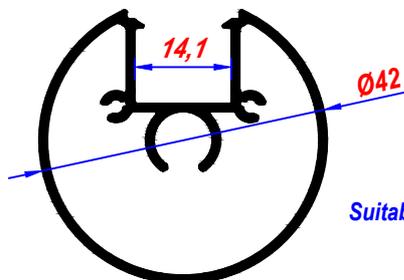

**AVZ-001 P**

P.C. Diffuser



Opal

ALUMINIUM HAND-RAIL PROFILE


Suitable for use as round led linear pendant lighting, and as a decorative led leg with furniture.

**YA-MK01 T**

Alu.Laser End Cap



MOUNTING

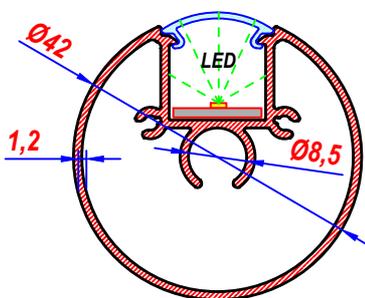

HAND RAIL APPLICATION



2 DIFFERENT LINEAR PENDANT APPLICATIONS



All cutting dimensions and surface coatings can be done according to requirements

POLYCARBONATE PIPE PROFILES

YA - PB 40

Polycarbonate Pipe  
Ø 40 mm-OPAL  
Thickness:2 mm

YA - PB 50


Polycarbonate Pipe  
Ø 60 mm-OPAL  
Thickness:1.4 mm

YA - PB 60


Polycarbonate Pipe  
Ø 59,5 mm-OPAL  
Thickness:1.4 mm

YA - PB 70


Polycarbonate Pipe  
Ø 70 mm-OPAL  
Thickness:2 mm

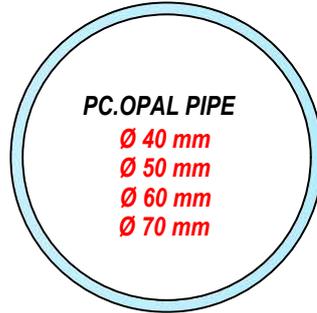

METAL END CAP

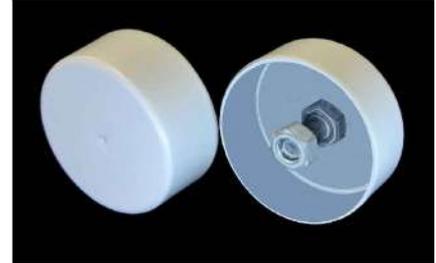


End Cap, Hanging Accessories

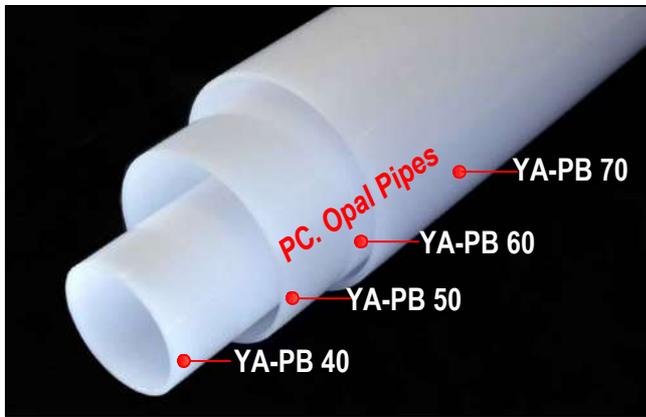

LIGHT BOX PROFILE

**YA-LB 01**


Light Box Profile  
H: 45 mm

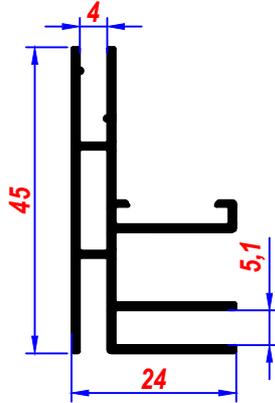

Thanks to the detachable specially printed vinyl cloth, the case does not change when the advertising print is changed.

The new economic aluminum profile, which is labor-saving and better illuminated

YA-LB 01

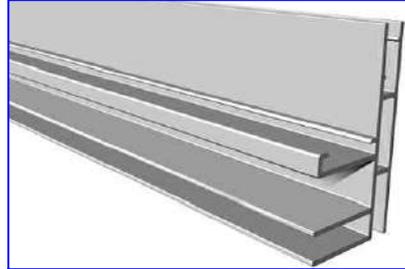

ALUMINIUM PRF. 610 cm

3 DIFFERENT LIGHT BOX APPLICATIONS




**YA-207 E1**

H. ZM Connector




Special Edition Vinyl Coated Cloth

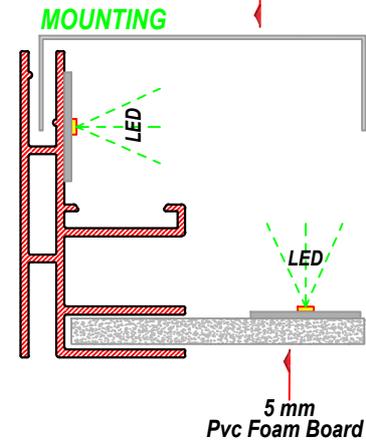

**YA-R 01**

Sign Profile

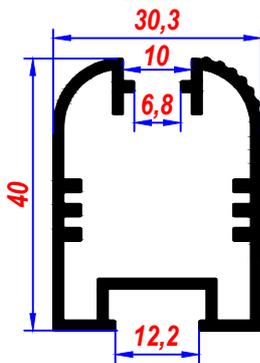


SIGN PROFILE

**YA-R 01 T**

Plastic End Cap



Color : Grey



MOUNTING CEILING


Using for Illuminated directional sign

10 mm plexiglass

STRETCH CEILING PROFILE


**YB-001**

Alu.Led Case  
Stretch Ceiling



YB - 001

ALU.PRF. 610 cm

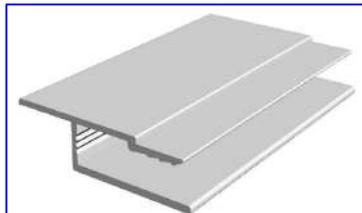

Stretch Ceiling & Barisol Profile

Stretch Ceiling Application




All cutting dimensions and surface coatings can be done according to requirements

AQUARIUM LIGHTING PROFILES AND ACCESSORIES

NEW

YA-AK 03

Alu. Aquarium Profile

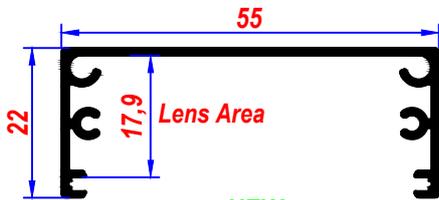

NEW

YA-AK03 C


PC-PMMA Diffuser



Thickness: 1,5 mm-Transparent

YA-AK 03

YA-AK03 C

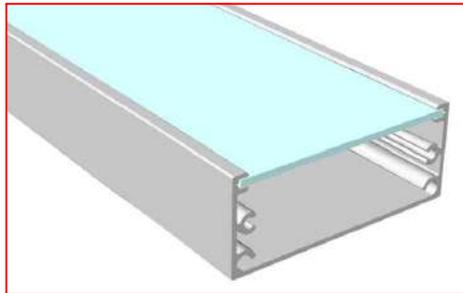

TRANSPARENT DIFFUSER - 305 cm

YA-AK03 T

Alu.Laser End Cap



Thickness: 1,5 mm

YA-LS 1

Polycarbonate Lens



Ø 21 mm, H=14 mm

YA-001 S


ON-OFF Switch



Using on End Cap

YA-AK03 A

Adjustable Leg  
Stainless Steel




AQUARIUM LIGHTING



AQUARIUM LIGHTING PROFILES AND ACCESSORIES

**YA-AK 01**

Alu. Aquarium Profile  
**ECONOMIC**

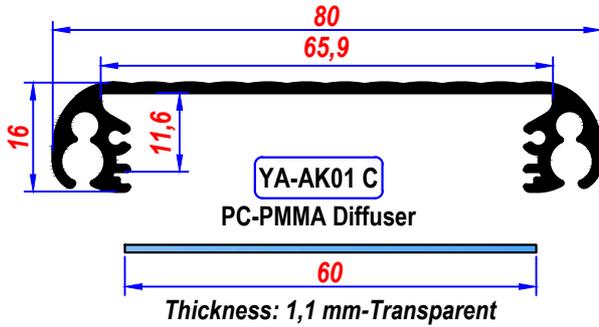

**YA-AK01 T**

Alu.Laser End Cap



Thickness: 1,5 mm

Off Scale

**YA-AK01 A**

Adjustable Leg  
Stainless Steel




**YA-001 S**

ON-OFF Switch



Using on End Cap

**YA-AK01 C PC.PRF.**

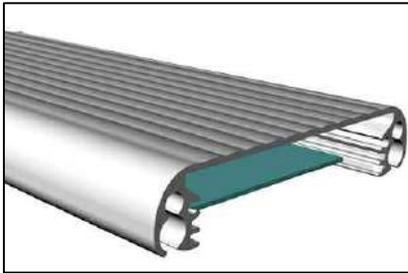

ALU.PRF. - PC. PRF 610 mm

**AQUARIUM LIGHTING**



**YA-AK01 T1**  
End Cap




**YA-AK01 T2**  
End Cap



ALU L SHAPE LASER CUT END CAP


**YA-AK 02**

Alu. Aquarium Profile  
**PROFESSIONAL**

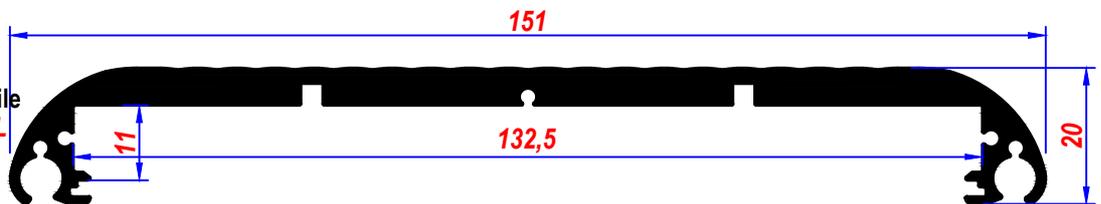

**YA-AK02 C**

PC-PMMA diffuser



**YA-AK02 T**

Alu.Laser  
End Cap



**YA-AK02 A**

Adjustable Leg  
Stainless Steel




**YA-001 S**

ON-OFF Switch



Using on End Cap

ALU.PRF. - PC. PRF 610 mm

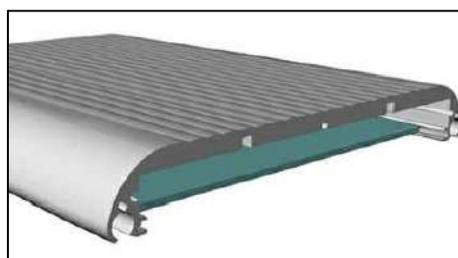

**YA-AK02 T1**  
End Cap





**YA-AK02 T2**  
End Cap




ALU L SHAPE LASER CUT END CAP

**ALU. LED - CHANDELIER PROFILE AND ACCESSORIES**  
 Aluminium profiles that has AVZ code can be produced to easy bending



**AVZ-001 ALU.**



**AVZ-001 ALU.**

*Existing accessories and diffusers are compatible with the newly produced ya-001 aluminum profile.*

**MODERN LED CHANDELIER APPLICATION**



**NEW AVZ-001 TN**  
 Plastic Hanger Accessory



*All of the accessories are produced in accordance with the coating.  
 Plastic Accessories are produced in the requested color.*



*Plastic hangers are suitable for Q: 9.5 MM nipples.*

*Hardness of aluminium profile can be varified to easy bend*

*All cutting dimensions and surface coatings can be done according to requirements*

**CIRCULAR ALU. LED – CHANDELIER PROFILES & ACCESSORIES**

<p><b>AVZ-002</b> Alu.Led-Chandelier Case</p>	<p><b>AVZ-002 P</b> PC Diffuser</p>	<p>PC.PROF. 610 cm</p>	<p><b>AVZ-001 PS</b> Modified Silicone Dif.</p> <p>Suitable for AVZ-002 Y 18 mm ECONOMIC</p>	<p><b>AVZ-002 Y</b> Alu.Led-Chandelier Case</p>
<p><b>PC. DIFFUSER</b></p>	<p><b>AVZ-002 S</b> Silicone Diffuser</p>	<p>SILICONE DIFFUSER 25 mt 16 mm ECONOMIC</p>	<p>DIFFUSER 50 mt-OPAL ALU.PRF.-MOD.SILICONE</p>	<p><b>AVZ-001 PS</b></p> <p>AVZ-002 Y</p>
<p><b>MOUNTING 2/1</b></p> <p><b>SILICONE DIF.</b></p>	<p><b>AVZ-002 PS</b> Modified Silicone Dif.</p> <p>ECONOMIC &amp; NEW</p>	<p>MODIFIED SILICONE 25 mt</p>	<p><b>MODERN LED CHANDELIER APPLICATIONS</b></p>	
<p><b>3 DIFFERENTS DIFFUSER</b></p>	<p><b>AVZ-002 T</b> Metal End Cap</p> <p>Stainless Diameter; 16,3 mm Suitable for AVZ-002</p>		<p><b>AVZ-002 YT</b> Metal End Cap</p> <p>Stainless Diameter; 19,4 mm Suitable for AVZ-002 Y</p>	


CIRCULAR ALUMINUM PROFILES WITH OPTIMUM FLEXIBILITY FOR BENDING, SINGLE-SIDED

**DOUBLE-SIDED CIRCULAR ALU. LED – CHANDELIER PROFILES & ACCESSORIES**



<p><b>AVZ-003</b> Alu.Led-Chandelier Case</p>	<p><b>AVZ-003 P</b> PC Diffuser</p>	<p><b>AVZ-003 S</b> Silicone Diffuser</p>	<p><b>AVZ-003 PS</b> Modified Silicone Dif.</p>	<p><b>DOUBLE-SIDED DIFFUSER</b></p>
<p><b>OPTIMUM FLEXIBILITY FOR BENDING</b> <b>DOUBLE-SIDED ALUMINUM PROFILE</b></p> <p>PC DIF.</p>	<p>ALU.-PC.PROF. 610 cm</p>	<p>SILICONE DIFFUSER 25 mt</p>		
<p><b>MOUNTING 2/1</b></p> <p><b>SILICONE DIF.</b></p>	<p>PC. &amp; SILICONE DIFFUSER, OPAL</p>		<p><b>TWO DIFFERENT MODERN LED CHANDELIER APPLICATIONS</b></p>	
<p><b>MOUNTING 2/1</b></p>	<p><b>AVZ-002 T</b> Metal End Cap</p> <p>Stainless Diameter; 16,3 mm Suitable for AVZ-003</p>			

All cutting dimensions and surface coatings can be done according to requirements






NEW DOUBLE-SIDED ALM. LED – CHANDELIER PROFILES & ACCESSORIES





Modern double-sided aluminum profile with optimum flexibility for bending.



Double-sided, Two different lighting options can be applied

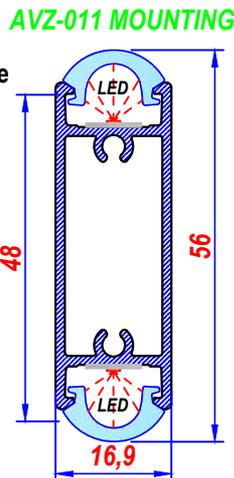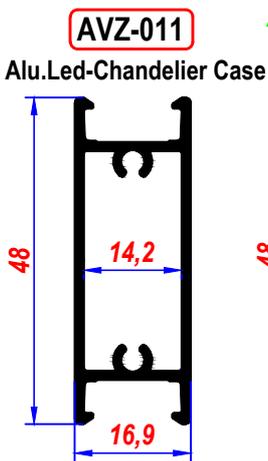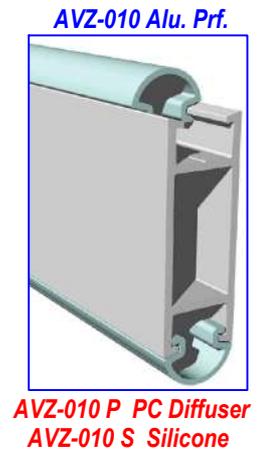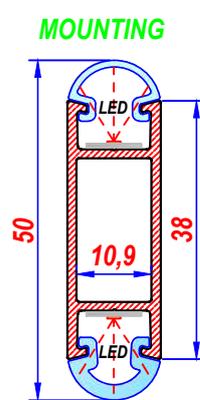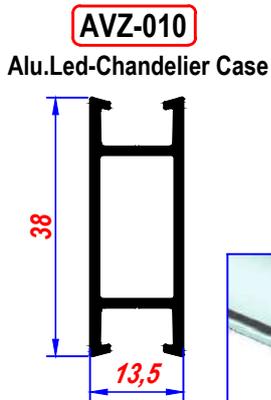

DOUBLE-SIDED DIFFUSER

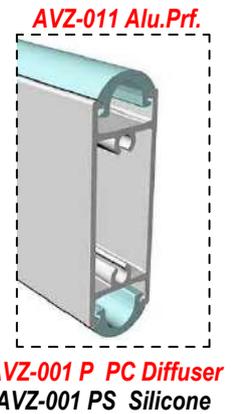

DOUBLE-SIDED DIFFUSER





- \* Suitable rigidity for bending, aluminum profile
- \* custom production is available in the desired size-shape
- \* color options available in desired ral codes
- \* unlike avz-010, it is larger and more decorative
- \* suitable for single-sided diffuser use

NEW SINGLE-SIDED LED – CHANDELIER PROFILES & ACCESSORIES

NEW

AVZ-013

Alu.Led-Chandelier Case

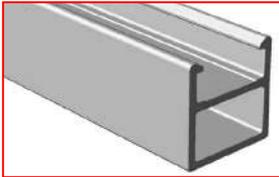

AVZ-010 P and AVZ-010 S are used as diffusers


AVZ-010 P  
PC Diffuser



AVZ-010 S  
Silicone Diffuser



SILICONE DIFFUSER 25 mt-OPAL

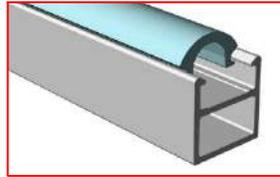


ALU. PRF. 610 cm


New single-sided aluminum chandelier profile, produced with suitable rigidity for bending  
Color options available in desired ral codes  
Accessories suitable for painting and coating  
High light transmittance, 2 diffusers

MOUNTING

AVZ-010 P  
PC.Diffuser




AVZ-010 S  
Silicone



AVZ-012

Alu.Led-Chandelier Case



ALU. PRF. ve PC. DIFFUSERS 610 cm

YA-012 A


PC Diffuser



YA-012 A

AVZ-012

YA-012 A



Suitable rigidity for bending  
Color options available in requested  
Accessories suitable for coating  
Diffuser with high light transmittance

AVZ-012 MOUNTING


AVZ-012 T1

Plastic Connecting Cap



Suitable for coating

L.Gray-Natural



L.Gray-Natural



Suitable for coating

AVZ-012 T

Plastic End Cap

CHANDELIER HANGER ACCESSORIES

AVZ-BE 1

Collector



Gold/Chrome/Black Coating

AVZ-BE 2

Hanger Screw



Gold/Chrome/Black Coating

AVZ-BE 3

Nipple Holder



Gold/Chrome/Black Coating

AVZ-BE 4

Spot Hanger Spring



Chrome Coating

NEW

AVZ-BE 5





Hanger Bracket



Chrome Coating

All cutting dimensions and surface coatings can be done according to requirements

3 TYPES OF BENDABLE ALU. LED - CHANDELIER PROFILES & ACCESSORIES

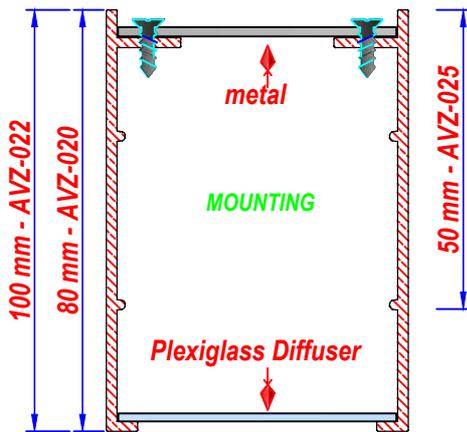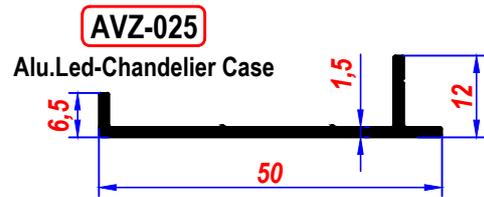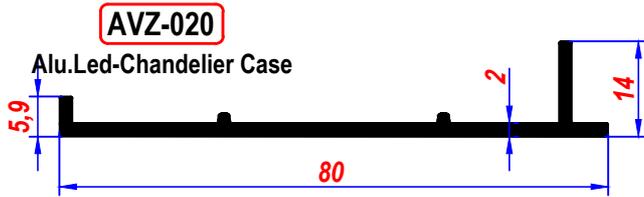

PC.- ALU.PRF. 610 cm



AVZ-020

NEW AVZ-025

BAGEL



TRIANGLE BAGEL



TRIANGLE DRUM



- \* Alu. prf.can be produced with a hardness suitable for bending.
- \* Can be produced in requested shape and size
- \* Can be produced in requested color


SQUARE OVAL BAGEL




SQUARE DRUM




TRIANGLE OVAL DRUM

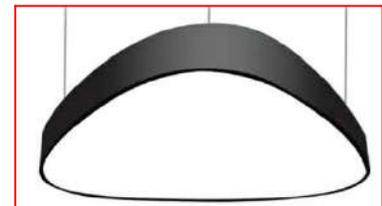

CLOUD

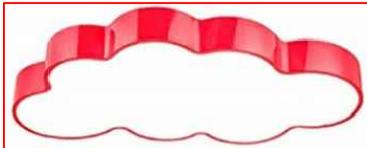

WATERWAY

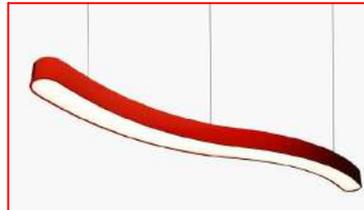


DRUM



HEXAGON BAGEL-DRUM



DIMPLE

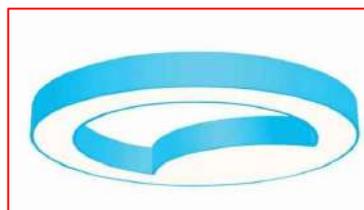

TRIANGLE STAR



All cutting dimensions and surface coatings can be done according to requirements

DECORATIVE ALU.LED - CHANDELIER PROFILE AND ACCESSORIES

**AVZ-015**  
Alu.Led-Chandelier Case

28,2  
13,9  
16,9

SECURED BY A PATENT

ALU. PRF. 610 cm

DIFFUSER; AVZ-001 PS

AVZ-001 PS  
Modified Silicone Diffuser

18  
ECONOMIC

ROLLED; 25 MT

MOUNTING AVZ-001 PS

28,2  
33  
16,9  
AVZ-015

DOUBLE-SIDED ALM. LED - CHANDELIER PROFILES & ACCESSORIES

**AVZ-017**  
Alu.Led-Chandelier Case

23,5  
13,9  
16,9

SECURED BY A PATENT

ALU. PRF. 610 cm

DIFFUSER; AVZ-001 PS

Double-sided illuminated chandelier

Suitable rigidity for bending  
Color options available in desired ral codes  
Accessories suitable for coating  
Diffuser with high light transmittance  
Accessories will be available very soon

AVZ-001 PS  
Modified Silicone Dif.

18  
ECONOMIC

ROLLED; 25 MT

MOUNTING AVZ-001 PS

33  
16,9  
AVZ-017

NEW ALU. SINGLE-SIDED LED - CHANDELIER PROFILES & ACCESSORIES

**NEW AVZ-018**  
Alu.Led-Chandelier Case

16,9  
14  
16,9

ALU. PRF. 610 cm

DIFFUSER 25 mt-OPAL

ALU. PRF. 610 cm

Bu üründe difüzör olarak, AVZ-001 PS kullanılır

AVZ-001 PS  
Modified Silicone Dif.

18 mm ECONOMIC

DIFFUSER 25 mt-OPAL

AVZ-001 P  
PC Diffuser

16,2

ALU.-PC.PRF. 610 cm


AVZ-001 PS MOUNTING AVZ-001 P

22  
16,9  
16,9

20  
16,9  
16,9

All cutting dimensions and surface coatings can be done according to requirements

DECORATIVE LED PROFILE & ACCESSORIES FOR DUAL OR TRIPLE DIFFUSER CHANDELIER

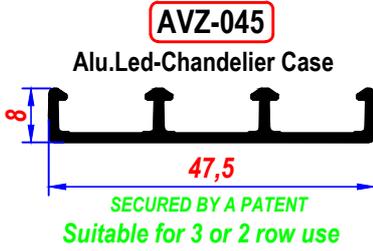

**AVZ-045 TN**  
Plastic Hanger Accessory




**AVZ-045 T**  
End Cap




**AVZ-001 PS**


Modified Silicone Dif.

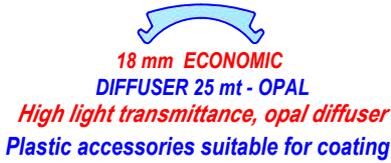

DUAL SILICONE APPLICATION




TRIPLE SILICONE APPLICATION




Alu.profile suitable for bending.  
Can be produced in requested color


DECORATIVE ALU.LED - CHANDELIER PROFILE AND ACCESSORIES

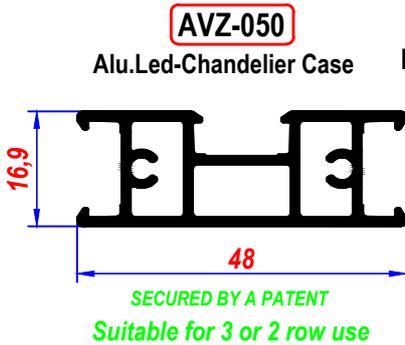


**AVZ-001 PS**  
Modified Silicone Diffuser




ALU. PRF. 610 cm




DIFFUSER; AVZ-001 PS

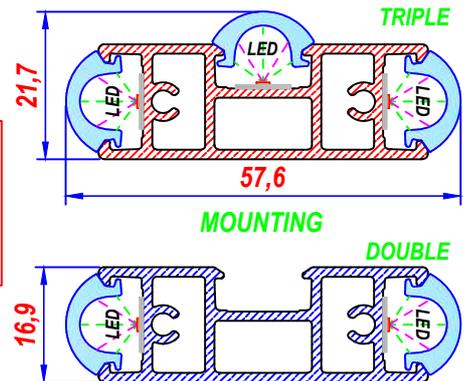


**AVZ-051**  
Alu.Led-Chandelier Case




**AVZ-001 PS**  
Modified Silicone Diffuser



ALU. PRF. 610 cm



DIFFUSER; AVZ-001 PS

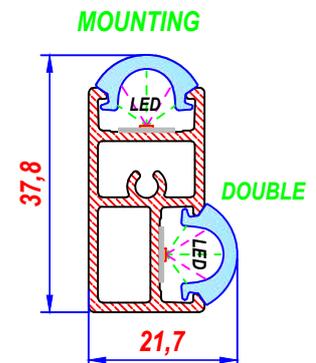


All cutting dimensions and surface coatings can be done according to requirements


ALU. LED-CHANDELIER PROFILE AND ACCESSORIES

**AVZ-030**

Alu.Led-Chandelier Case



AVZ-001 P, AVZ-001 S and AVZ-001 PS are used as diffusers in this product.



ALU. PRF. 610 cm

Can be produced to easy bending  
3 different diffuser options  
Can be produced in requested color  
Accessory suitable for paint and coating

**AVZ-001 P**

PC Diffuser



ALU.-PC.PRF. 610 cm

**AVZ-001 S**


Silicone Diffuser



SILICONE DIFFUSER 25 mt

**AVZ-001 PS**

Modified Silicone



MODIFIED DIFFUSER 25 mt

**AVZ-030 DY**

Screwed Joint Splice Acces.



2 Screwed

**AVZ-030 T**

Plastic End Cap



End of the product



**AVZ-030 TN**

Plastic Hanger Accessory




Top Nipple

All of the accessories are produced in accordance with the coating.

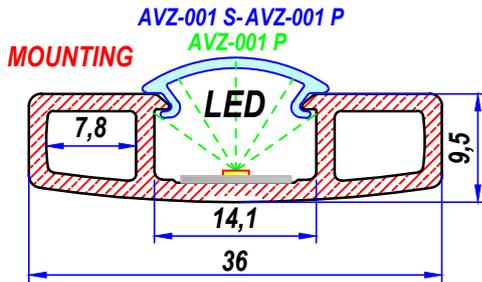


PC. DIFFUSER & ALU. PRF. 610 cm



SILICONE DIFFUSER & ALU. PRF.


**AVZ-005**

Alu.Led Case



**YA-001 A**

U P.C.Diffuser



Opal-Transparent

**YA-001 C**


Straight P.C.Diffuser



Opal-Transparent

**YA-001 E**

Low Camber P.C.Diffuser



Opal-Transparent

**YA-001 F**

Mid Camber P.C.Dif.



Opal-Transparent

**YA-001 E**



**YA-001 F**



**YA-005 A**

Low Camber Pls.End Cap




**YA-005 B**

Mid Camber Pls. End Cap



**YA-005**



P.C.- ALU.PRF. 610 cm

**YA-005**






P.C.- ALU.PRF. 610 cm

MODERN CHANDELIER APPLICATION





All cutting dimensions and surface coatings can be done according to requirements


NEW ALU. LED – CHANDELIER PROFILES & ACCESSORIES

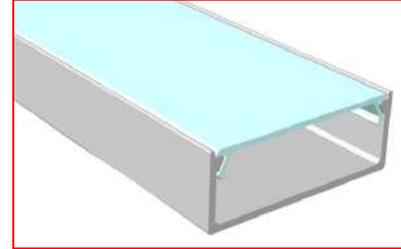

PC.DIFFUSER-ALU.PRF. 610 cm

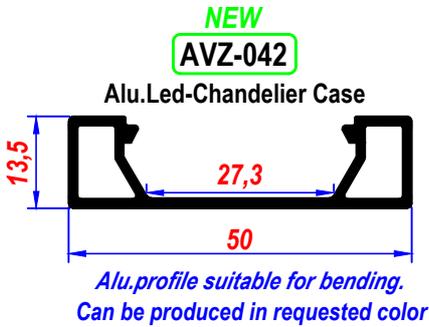

HIGH LIGHT TRANSMITTANCE DIFFUSER

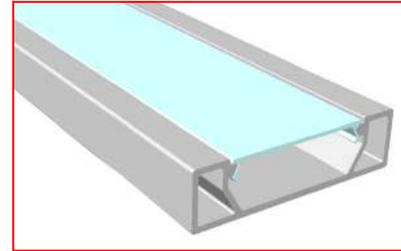

PC.DIFFUSER-ALU.PRF. 610 cm

ALUMINIUM WELDING WIRE & WELDING ROD

5356 MIG -- AlMg5 -- Thickness 1 - 1,2 mm



7 KG/SPOOL

5356 TIG -- AlMg5 -- Thickness 2 - 2,4 mm




5 KG/BOX

OUR SERVICES:


Custom led housing case production according to designs  
Cutting, tearing, drilling, punching profiles for required sizes  
Different surface coatings according to requirements  
Most of our products in stock and minimum order quantity not need

All cutting dimensions and surface coatings can be done according to requirements


INDOOR STAIRS LIGHTING

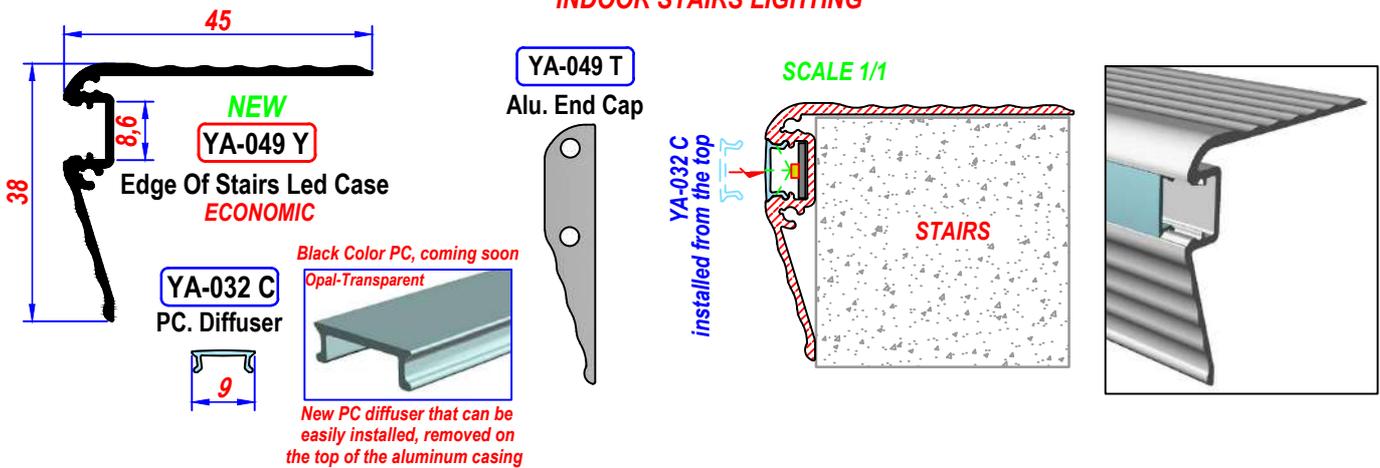


INDOOR STAIRS LIGHTING

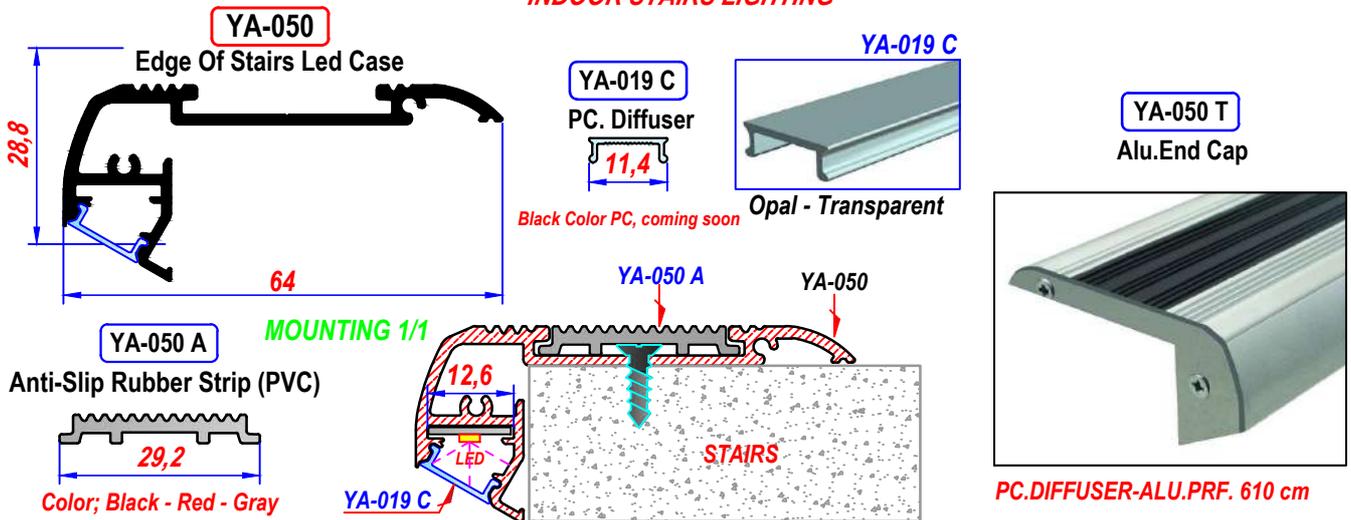

CABLE CHANNEL PROFILES





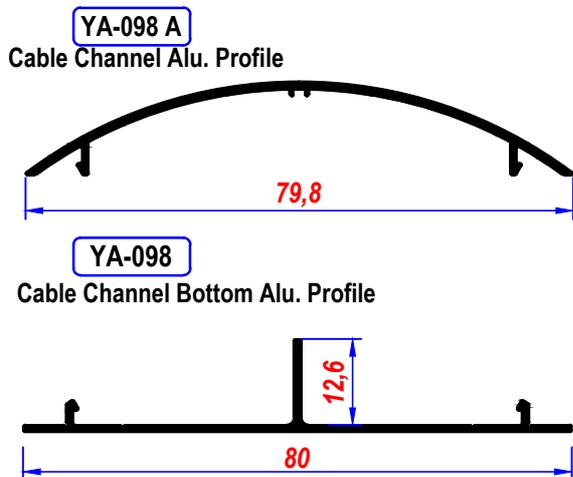


ALUMINUM PROFILES 610 cm




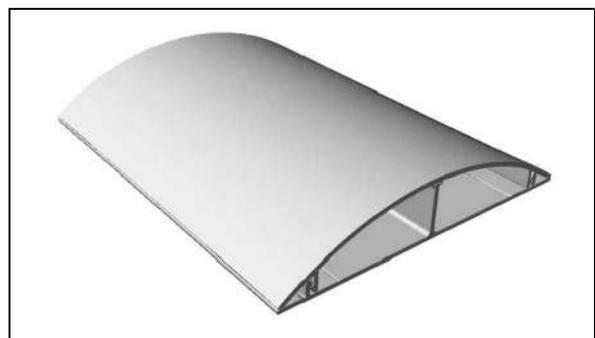


All cutting dimensions and surface coatings can be done according to requirements

INDOOR, CORRIDORS, FOOTPATHS LIGHTING PROFILES AND ACCESSORIES

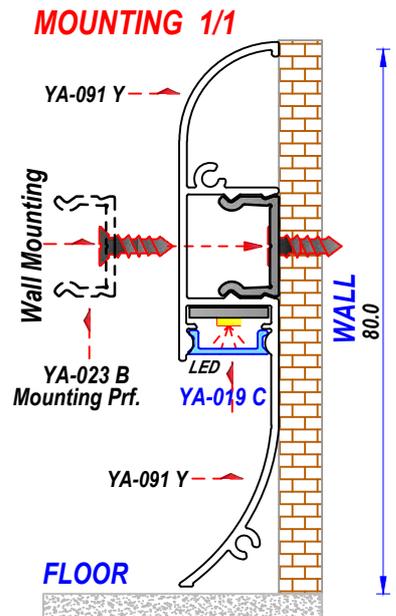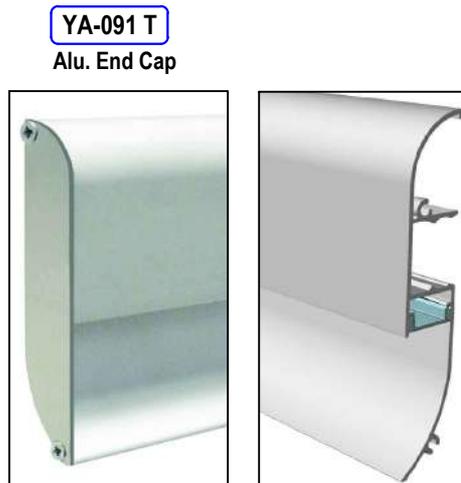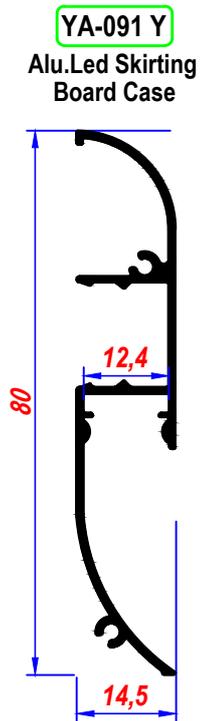


INDOOR, CORRIDORS, FOOTPATHS LIGHTING PROFILES AND ACCESSORIES

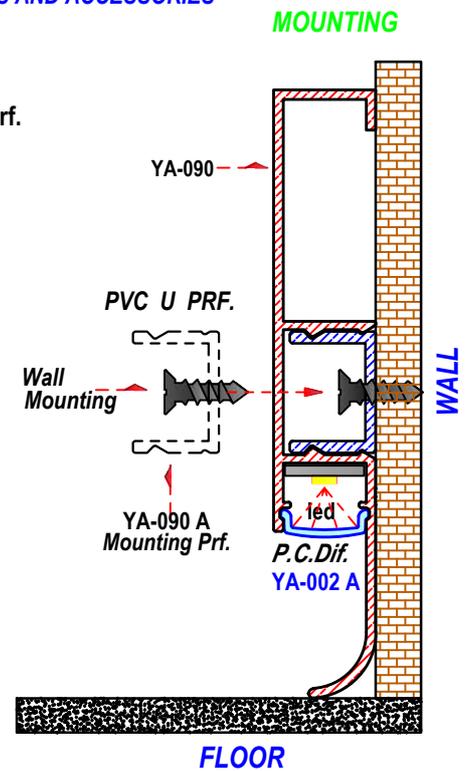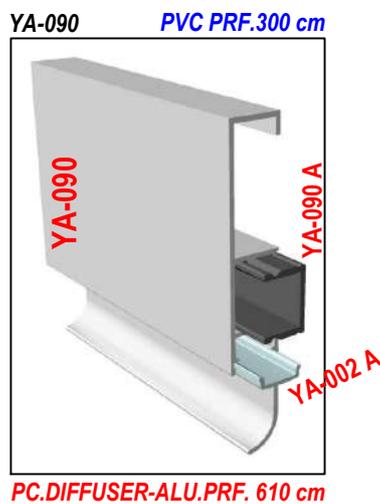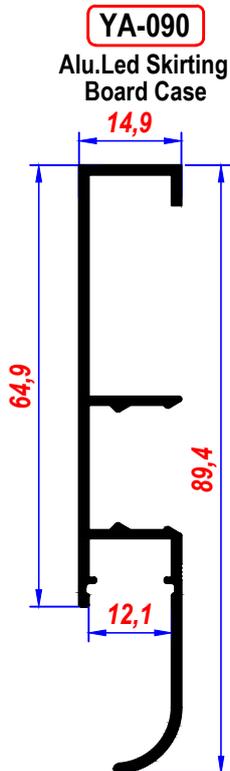


All cutting dimensions can be done according to requirements

LED SKIRTING BOARD - PLINTH PROFILE AND ACCESSORIES

**YA-092**  
Alu.Led Skirting Board - Plinth Profile

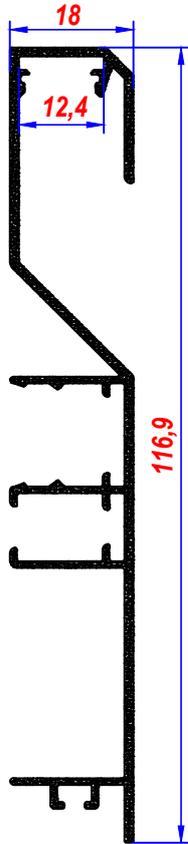

**MD-445**  
Alu. Corner Turning Profile

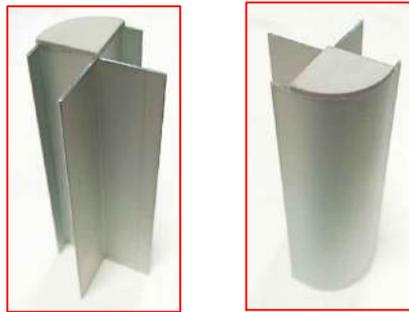

INNER CORNER      OUTER CORNER


YA-092 INNER - OUTER CORNER APPLICATION



**YA-019 C**  
PC. Diffuser



Opal - Transparent  
Black Color PC, coming soon



PC DIFFUSER 610 cm

**BZ-001**

Plastic Plinth Clip




This product has accessory equipment that can be used as a led skirting board or led plinth.


**BF-101**  
Bottom Wick




**YA-023 B**  
Wall Mounting Prf.



LED SKIRTING BOARD - LED PLINTH APPLICATION

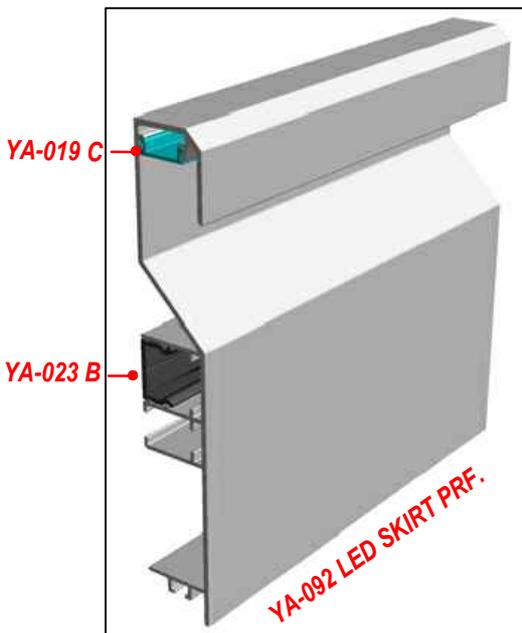

ALU.PRF. - PC. PRF 610 mm

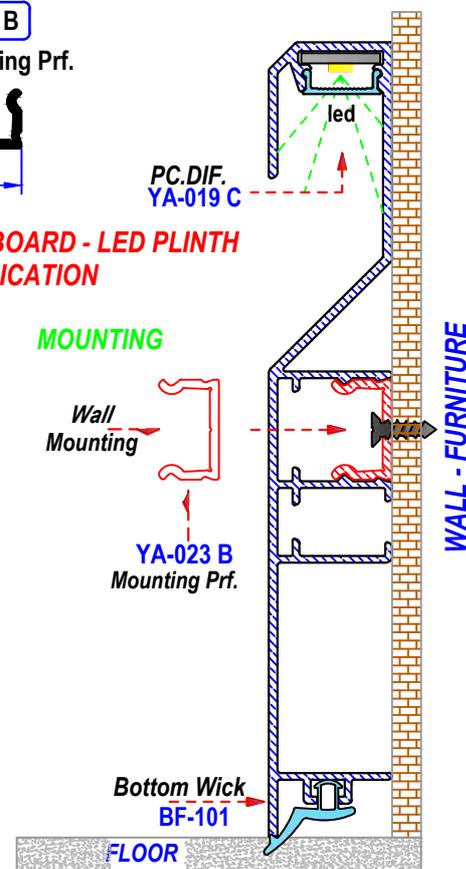


All cutting dimensions and surface coatings can be done according to requirements



**LED SKIRTING BOARD PROFILE & ACCESSORIES**

**APPLICATION**


**NEW**  
**YA-ALS 01**  
Alu.Led Skirting Board Case

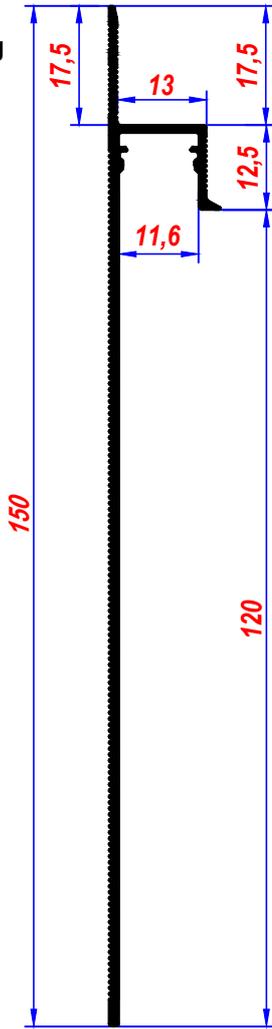

**YA-019 C**  
PC. Diffuser  
Opal - Transparent - Black

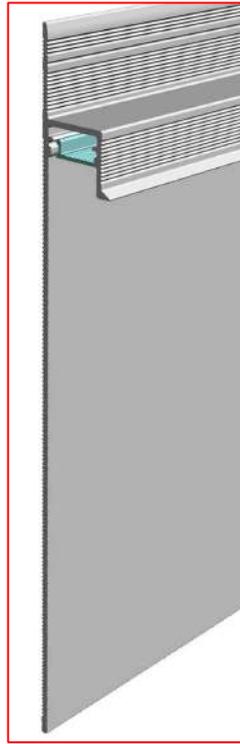


PC.DIFFUSER-ALU.PRF. 610 cm

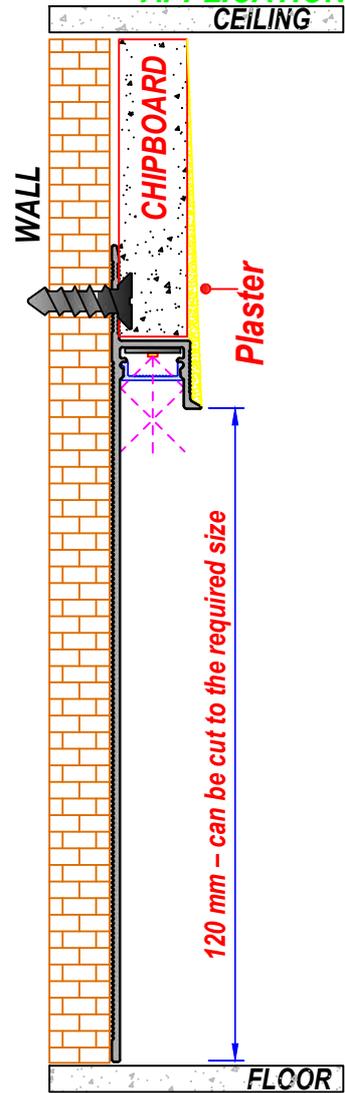


**LED SKIRTING BOARD PROFILE & ACCESSORIES**

**APPLICATION**


**NEW**  
**YA-ALS 02**  
Alu.Led Skirting Board Case



**YA-019 C**  
PC. Diffuser  
Opal - Transparent - Black





PC.DIFFUSER-ALU.PRF. 610 cm

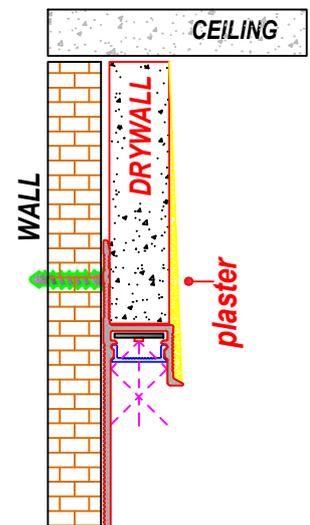


All cutting dimensions and surface coatings can be done according to requirements

LED COVING ALUMINUM PROFILES & ACCESSORIES  
DOUBLE-SIDED, DECORATIVE LIGHTING

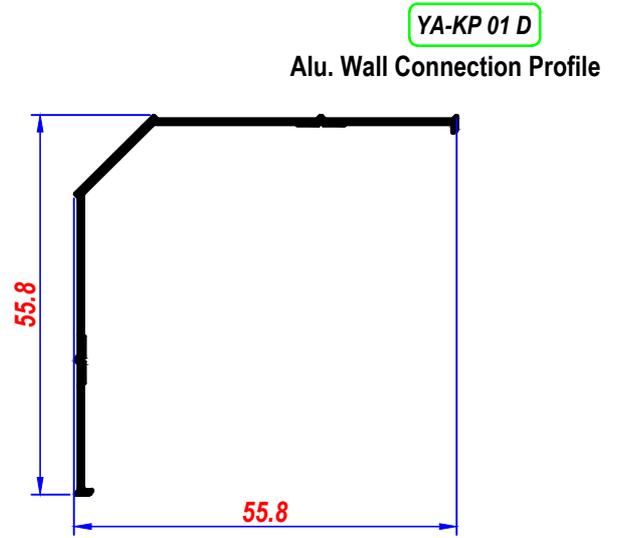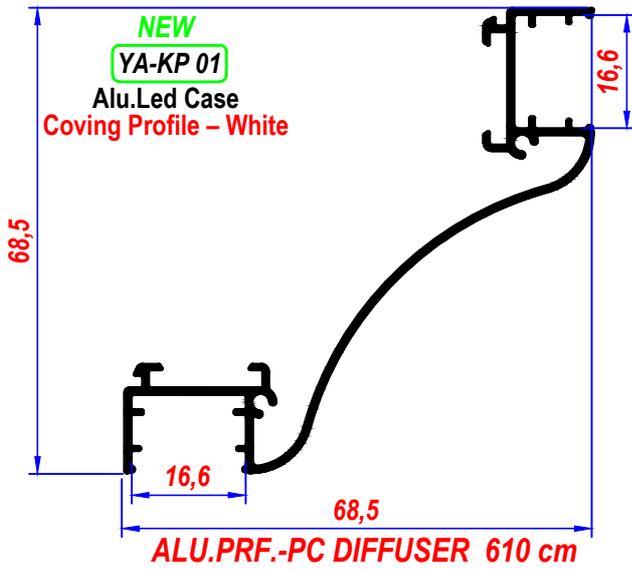


MOUNTING

APPLICATION

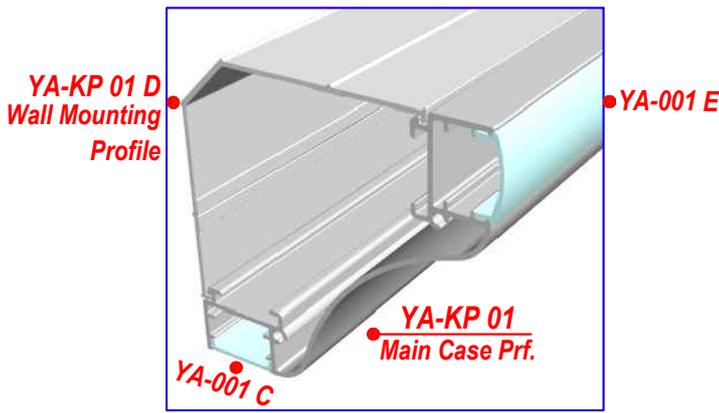


4 DIFFERENT DIFFUSERS CAN BE APPLIED


YA-001 C Straight P.C.Diffuser  
YA-001 E Low Camber P.C.Diffuser

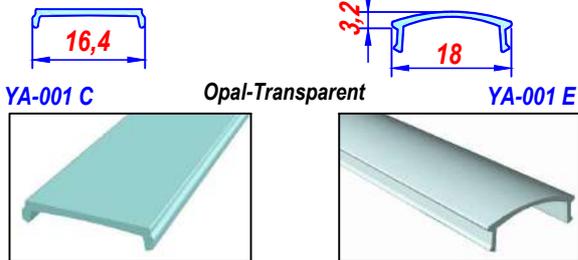

PC.DIFFUSER-ALU.PRF. 610 cm

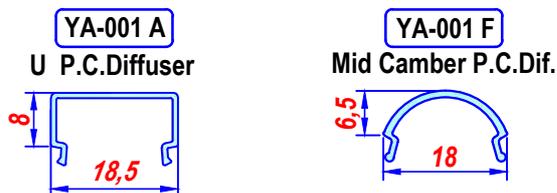


MOUNTING

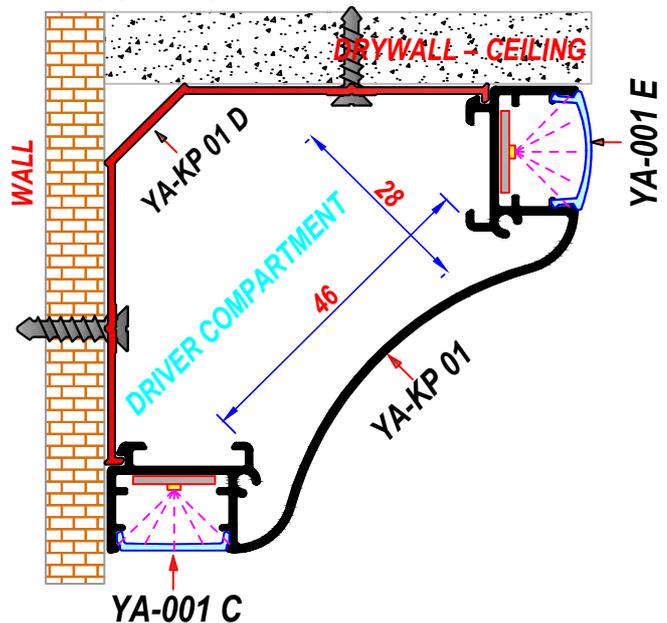


All cutting dimensions and surface coatings can be done according to requirements

LED COVING ALUMINUM PROFILES & ACCESSORIES


**NEW**  
**YA-KP 02**  
 Alu.Led Case  
 Coving Profile  
 White

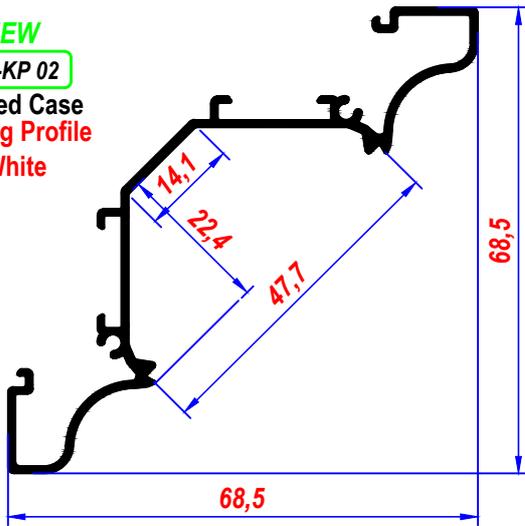


**NEW**  
**YA-KP 01 D**  
 Alu. Wall  
 Connection Prf.

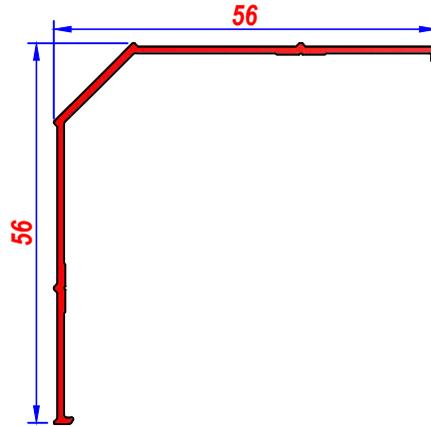



**NEW**  
**YA-KP 02 TB**  
 Alu. Laser End Cap  
 Suitable for YA-KP 02C



**NEW**  
**YA-KP 02 TD**  
 Alu. Laser End Cap  
 Suitable for YA-G50A




**YA-KP 02 C** PC. Oval Diffuser **SOON**

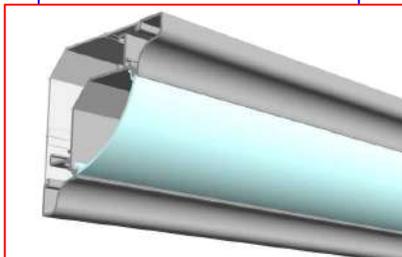


CURVED DIFFUSER

**YA-G50 A** PC. Diffuser

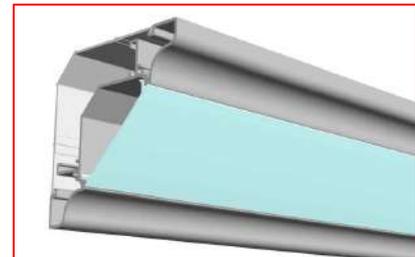


FLAT DIFFUSER

**YA-KP 02 C DIFFUSER APPLICATION**

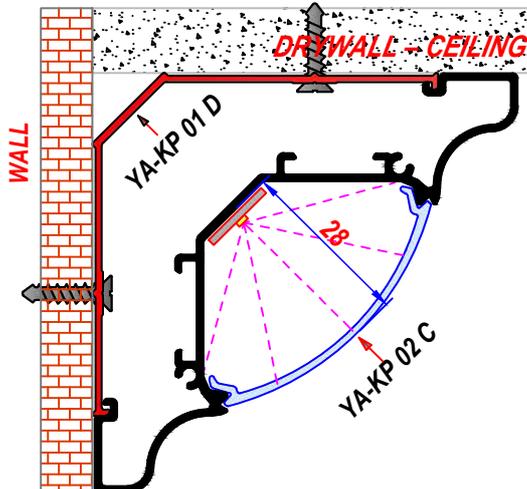


**YA-G50 A DIFFUSER APPLICATION**

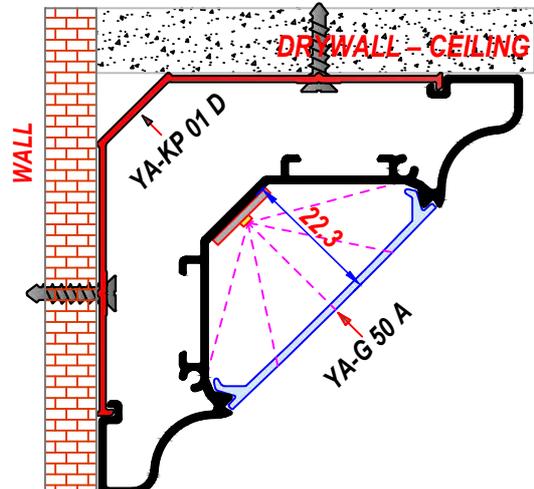

All cutting dimensions and surface coatings can be done according to requirements

LED COVING ALUMINUM PROFILES & ACCESSORIES

**NEW**  
**YA-KP 009**  
 Alu.Led Case  
 Coving Profile - White

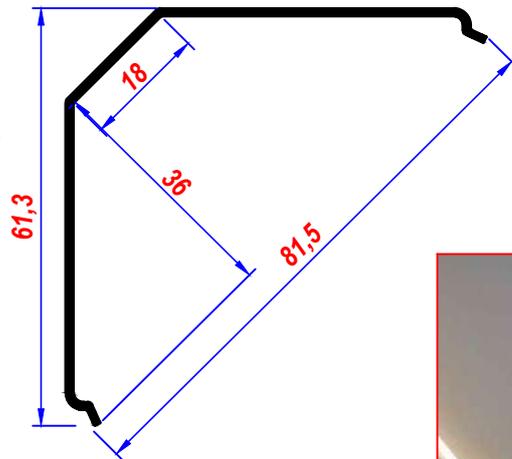


**YA-209 A**  
 PC. Diffuser



ALU.PRF.-PC DIFFUSER 610 cm


YA-209 A

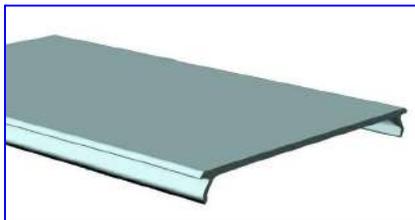

Sandy Opal




**MOUNTING** **DRYWALL - CEILING**

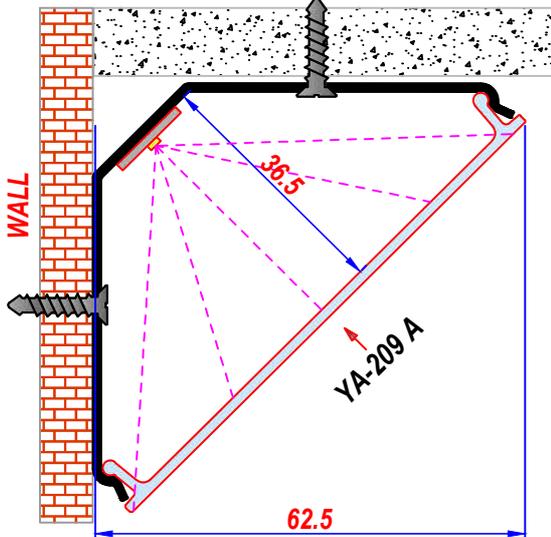

YA-KP 009 ALU. PRF.

YA-209 A PC. DIFFUSER

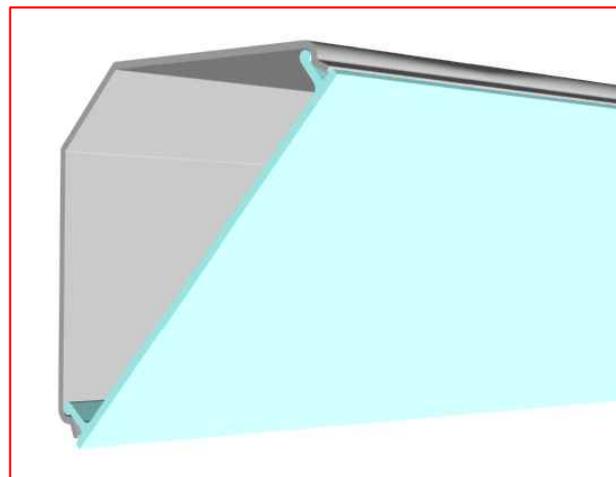


Alu. Profile & PC. Diffuser 610 cm


All cutting dimensions and surface coatings can be done according to requirements

LED COVING ALUMINUM PROFILES & ACCESSORIES


**NEW**  
**YA-KP 010**  
 Alu.Led Case  
 Coving Profile - White

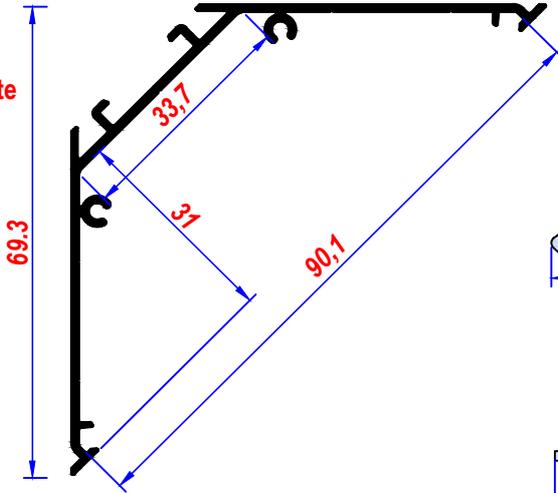

**YA-206 G**  
 PC. Oval Diffuser  
 Opal

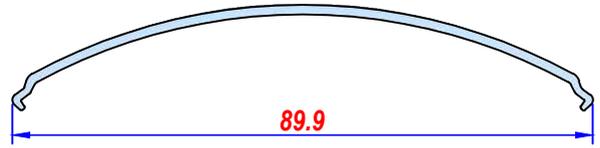



**NEW** **YA-KP 010 C**  
 PC. Diffuser

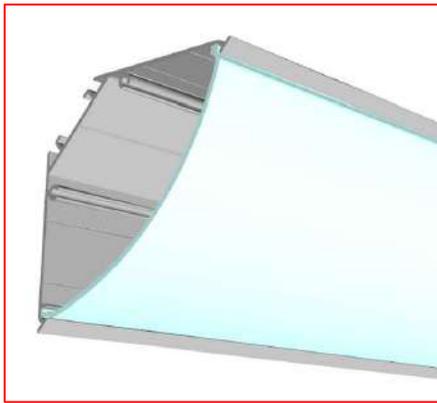

**YA-KP 010 TB**  
 Alu. Laser End Cap

**NEW**


**YA-KP 010 TD**  
 Alu. Laser End Cap




**MOUNTING**



**YA-206 G DIFFUSER APPLICATION**

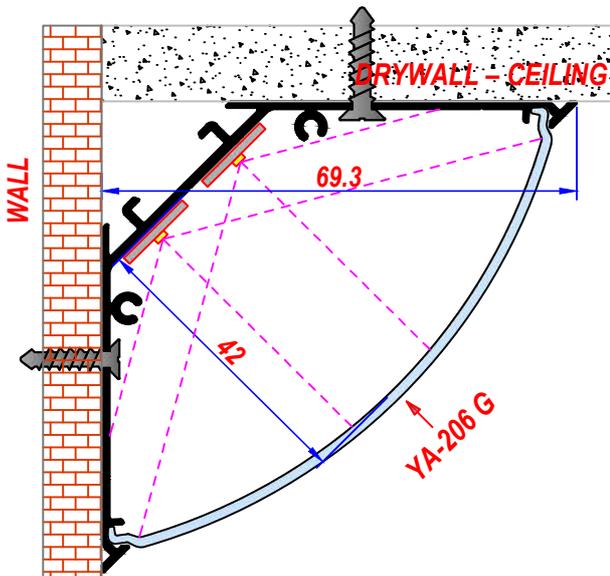


**YA-KP 010 C DIFFUSER APPLICATION**

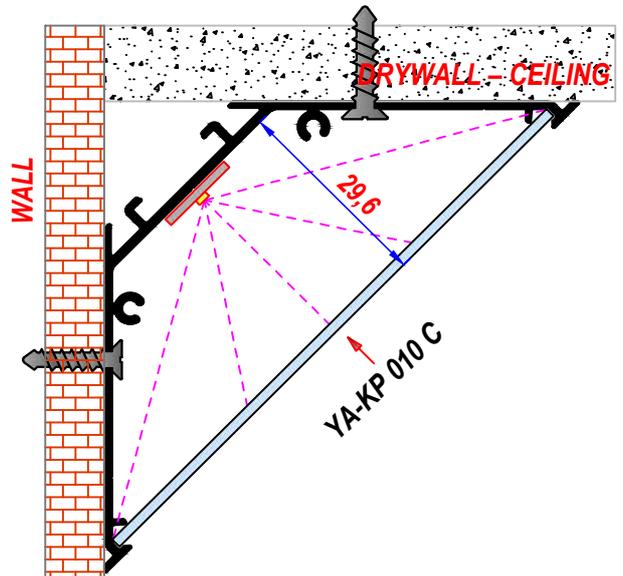

All cutting dimensions and surface coatings can be done according to requirements


**WET AREA – CERAMIC ALUMINUM LED PROFILES & ACCESSORIES**

**NEW YA-SR 15** IP 66  
Alu. Ceramic Led Case




Suitable for 12 mm PCB

**NEW YA-SR 15 C**  
PC. Diffuser




YA-SR 15 YA-SR 15 C



Alu. Prf.-PC. Diffuser 610 cm

**APPLICATION AREAS**



Ip66 decorative surface-mounted led profile for kitchens, bathrooms, wet areas

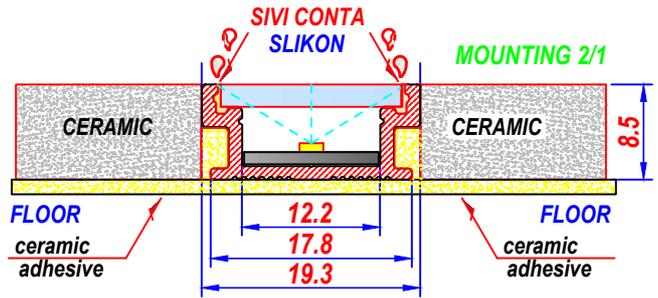

To ensure waterproofing of the product, high-quality silicone must be used.

**YA-SR 01**

Alu. Ceramic Led Case




Alu. Prf.-PC. Diffuser 610 cm

**YA-019 C**

PC. Diffuser




Opal-Transparent-Black





PC. Diffuser 610 cm

Decorative surface-mounted led profile for kitchens, bathrooms, wet areas

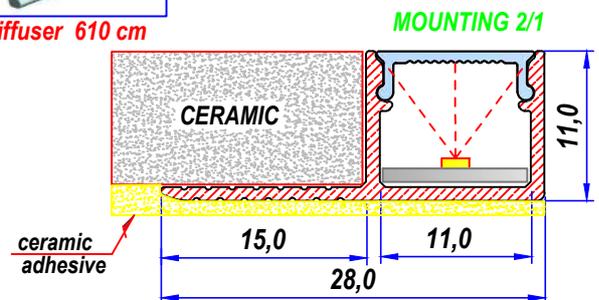

**YA-SR 11**

Alu. Ceramic Led Case




Alu. Prf.-PC. Diffuser 610 cm

**YA-1002 A**

PC. Diffuser




**Y-1002 A**





PC. Diffuser 610 cm

Decorative surface-mounted led profile for kitchens, bathrooms, wet areas

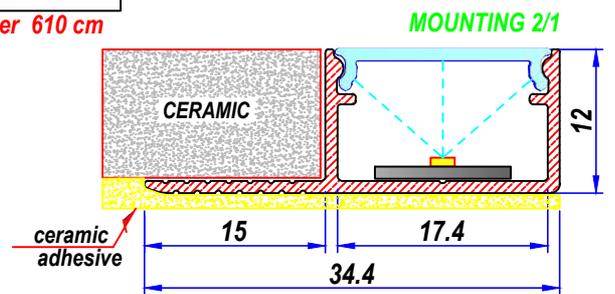

**YA-SR 12**

Alu. Ceramic Led Case




Alu. Prf.-PC. Diffuser 610 cm

**YA-1002 A**

PC. Diffuser




**Y-1002 A**




PC. Diffuser 610 cm

Decorative surface-mounted led profile for kitchens, bathrooms, wet areas

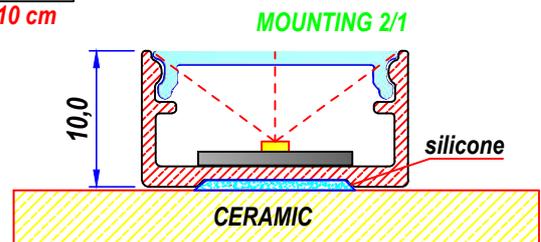


RECESSED DRYWALL LED LIGHTING PROFILES & ACCESSORIES  
Flexible Alu. Profile (Bendable In All Directions)

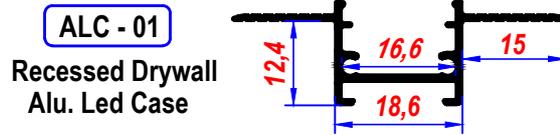


SUITABLE FOR 2 ALU. PROFILES, 4 DIFFERENT PC DIFFUSER OPTIONS

**NEW**  
**YA-ALC 03**  
Recessed Drywall Alu. Led Case  
**YA-001 C**  
PC.Diffuser  
**YA-001 E**  
PC.Diffuser




Detail; page 57

**NEW**  
**YA-ALC 04**  
Recessed Drywall Alu. Led Case

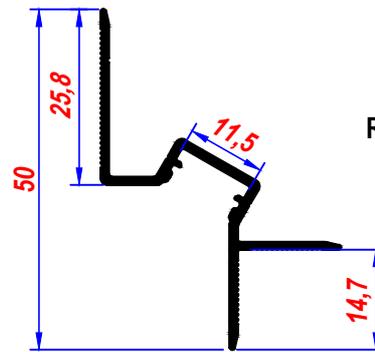

Detail; page 57

**NEW**  
**YA-ALC 02**  
Recessed Drywall Alu. Led Case




**AVZ-001 S**  
Silicone Diffuser  
**AVZ-001 PS**  
Modified Silicone

Detail; page 56

TRIMLESS CASE


**ALC-35 S**  
Recessed Drywall Alu. Led Case  
**TRIMLESS CASE**  
**YA-G 35 C**  
PC.Diffuser

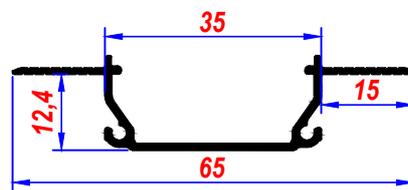


Detail; page 59



**NEW**  
**YA-ALS 01**  
Detail; page 48




**YA-ALC 35**  
Recessed Drywall Alu. Led Case  
**YA-G 35 C**  
PC.Diffuser

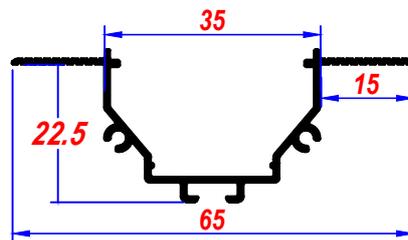

Detail; page 60




**NEW**  
**YA-ALS 02**



120

**ALC-50 S**  
Recessed Drywall Alu. Led Case  
**YA-G 50 A**  
PC.Diffuser

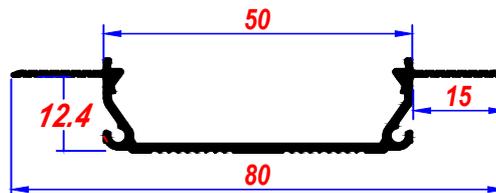


Detail; page 59



**RECESSED DRYWALL LED LIGHTING PROFILES & ACCESSORIES**

**TRIMLESS CASE**

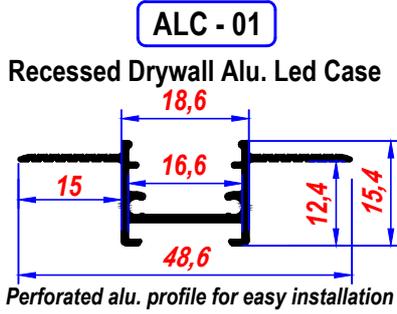

**RECESSED - TRIMLESS CASE APPLICATION**



Suitable for 2 aluminum profiles, 4 different diffuser options

**YA-207 E1**  
Horizontal 90° metal corner



60° / 120° / 135° / 150° Angle Brackets

Special for drywall, can be applied with seamless installation  
Decorative recessed (plaster-in) new products  
Suitable for square, rectangular, polygon applications with connectors


**YA-207 E3**  
ZM Connector




**YA-001 C**  
Straight PC Diffuser




**YA-001 A**  
U - PC Diffuser














**YA-001 F**  
Mid Camber PC Diffuser



**YA-001 E**  
Low Camber PC Diffuser



**PC.DIFFUSER - ALU.PRF. 610 cm 4 DIFFERENT PC. DIFFUSER OPTION PC.DIFFUSER; OPAL-TRANSPARENT**

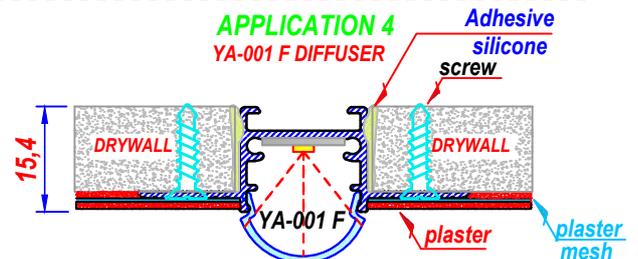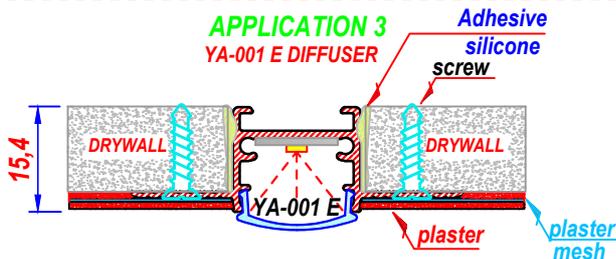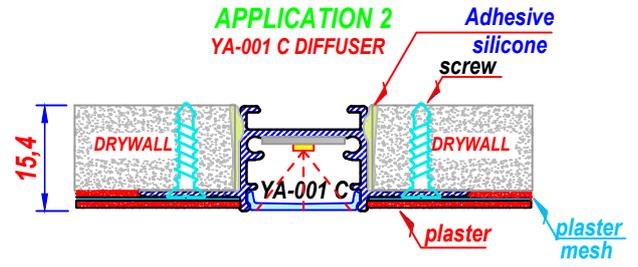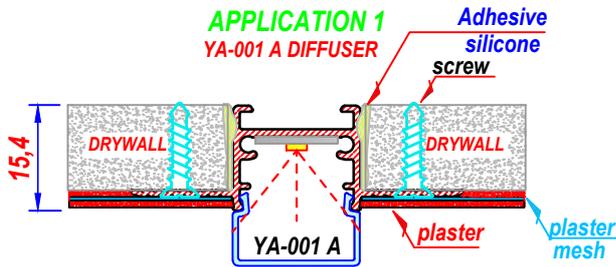


All cutting dimensions and surface coatings can be done according to requirements

**NEW, BENDABLE RECESSED DRYWALL LED PROFILES & ACCESSORIES**  
**TRIMLESS CASE**

**NEW**

**YA-ALC 02**

**Recessed Drywall Alu. Led Case**

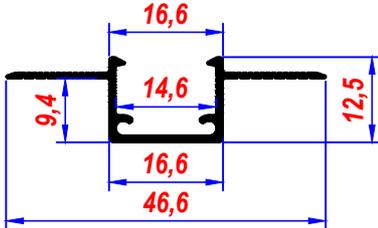

**FLEXIBLE ALU. PROFILE (BENDABLE IN ALL DIRECTIONS)**

**YA-ALC 02**

**AVZ-001 PS**



**PC. DIFFUSER 25 mt. - ALU.PRF. 305 cm**

**Aluminum profile has been made bendable through a special production technique.**

**AVZ-001 P**


**PC Diffuser**



**PC.DIFFUSER 610 cm**  
**For Straight Applications**

**AVZ-001 S**


**Silicone**



**25 - 50 mt. ROLLED**

**AVZ-001 PS**


**Modified Silicone**



**25 - 50 mt. ROLLED**

**ALC 01 T**

**Alu. End Cap**



**Thickness;1mm**




*All cutting dimensions and surface coatings can be done according to requirements*

NEW, RECESSED DRYWALL LED PROFILES & ACCESSORIES

NEW

YA-ALC 03


Recessed Drywall Alu. Led Case

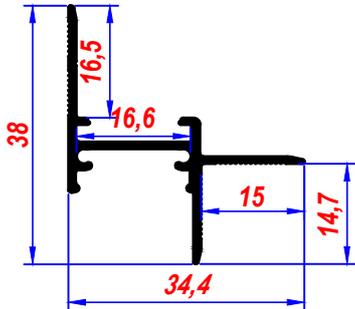

NEW

YA-ALC 04

Recessed Drywall Alu. Led Case

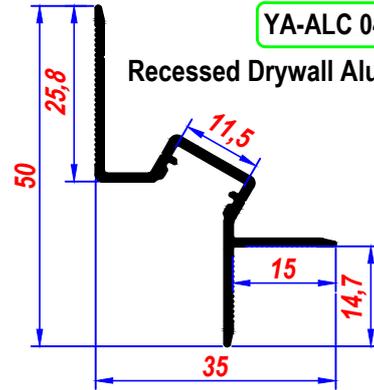


YA-001 C  
PC.Diffuser



Opal-Transparent


Alu.Prf. PC.Diffuser 610 cm



YA-001 E  
Low Camber PC Dif.




Opal-Transparent



YA-019 C  
PC. Diffuser




Opal-Transparent-Black




TWO DIFFERENT DIFFUSERS CAN BE USED


APPLICATION

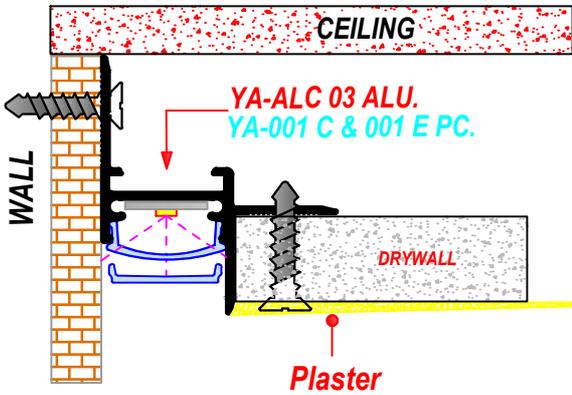


YA-ALC 03 ALU.PRF. & ACCESSORIES



APPLICATION

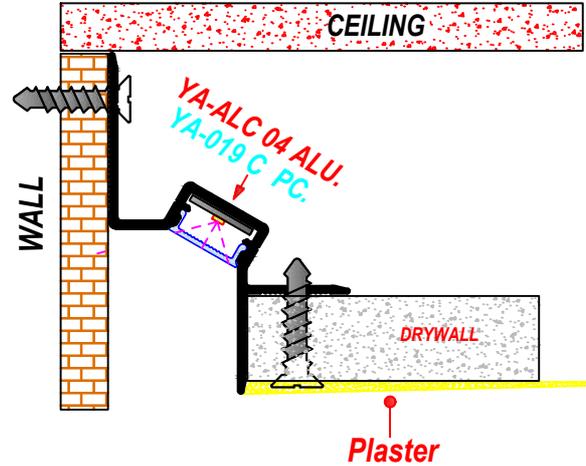



YA-ALC 04 ALU.PRF. & ACCESSORIES




All cutting dimensions and surface coatings can be done according to requirements

**NEW, RECESSED – DRYWALL PERFORATED PROFILE (25–35 MM) TRIMLESS CASES**


**EASY-TO-INSTALL PRODUCTS THAT CAN BE MOUNTED BY ONE PERSON**

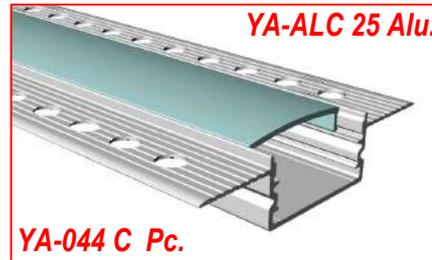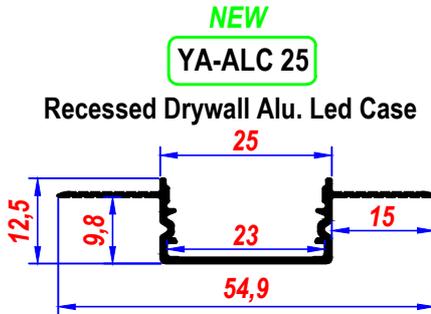

**New economical decorative recessed (plaster-in) products, special for drywall, suitable for seamless and easy installation.**



**APPLICATION**  
**YA-ALC 25**

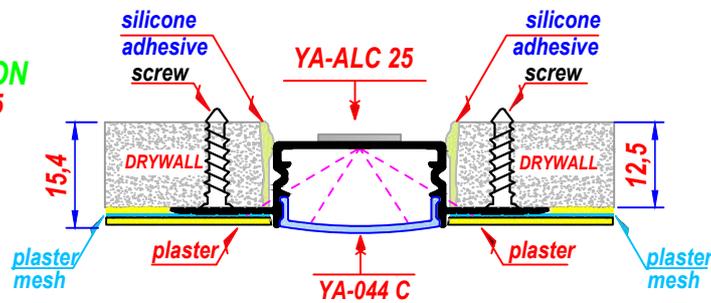

**YA-ALC 25 DRYWALL WALL AND CEILING APPLICATION**




*All cutting dimensions and surface coatings can be done according to requirements*

**RECESSED – DRYWALL PERFORATED PROFILE (35 AND 50 MM)  
TRIMLESS CASE**


EASY-TO-INSTALL PRODUCTS THAT  
CAN BE MOUNTED BY ONE PERSON

**ALC-35 S**

Recessed Drywall Alu. Led Case

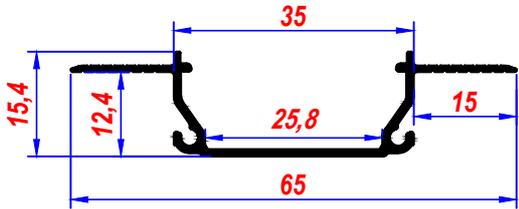

**PERFORATED ECONOMICAL 35 MM CASE**

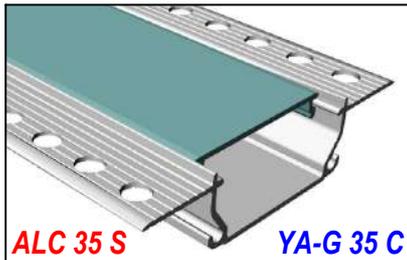


**ALC 35 S**


**YA-G 35 C**

**ALC-50 S**

Recessed Drywall Alu. Led Case

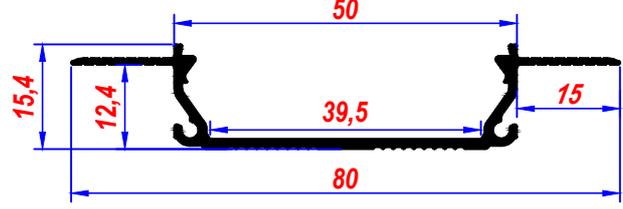

**PERFORATED ECONOMICAL 50 MM CASE**

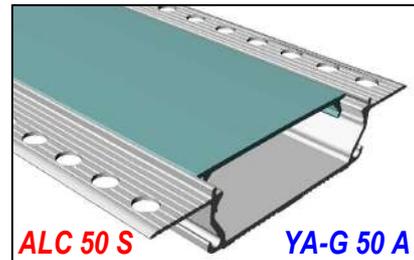

**ALC 50 S**

**YA-G 50 A**

ALU. PROFILE 610 cm  
PC. Diffuser 610 cm

Decorative recessed (plaster-in) economical products, special for drywall,  
suitable for seamless installation

**YA-G 35 C**


PC Diffuser



P.C. DIFFUSER 610 cm

**ALC 35 S-T**

Alu. Laser End Cap



Laser - 1 mm

**YA-G 50 A**


PC Diffuser



P.C. DIFFUSER 610 cm

**ALC 50 S-T**


Alu. Laser End Cap

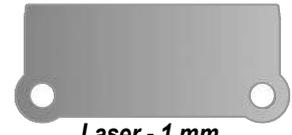



Laser - 1 mm

**MOUNTING**

ALC-35 S  
ALC-50 S

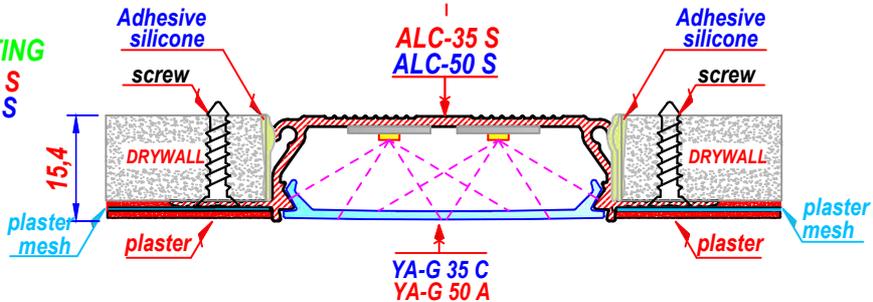

**ALC-35 S, ALC-50 S DRYWALL WALL AND CEILING APPLICATION**

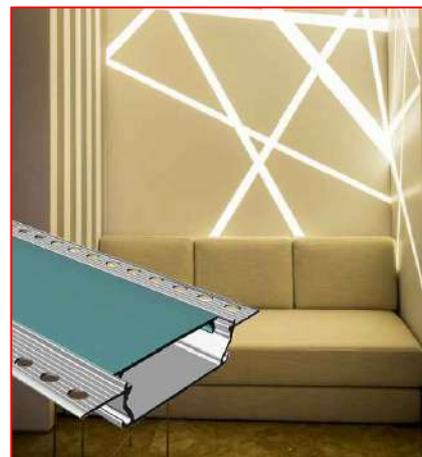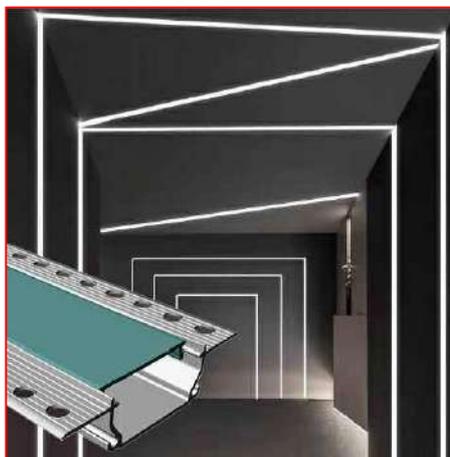


All cutting dimensions and surface coatings can be done according to requirements


RECESSED - DRYWALL LED LIGHTING PROFILES AND ACCESSORIES

**YA-ALC 35**

Recessed Alu. Led Case

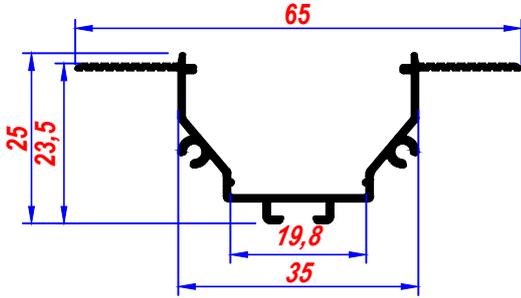

Specifically produced for drywall

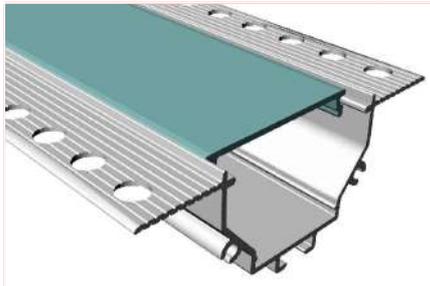

AU.-PC.PRF. 610 cm

**YA-G 35 C**


PC.Diffuser



Sandy Opal  
PC. DIFFUSER 610 cm

**YA-ALC 35 T**

Alu. End Cap



YA-G 35 Y APPLICATION




Applied to the casing by attaching YA-G35 Y mounting spring on each side.

**YA-G 35 Y**

Single Spring Retainer




Single Screw

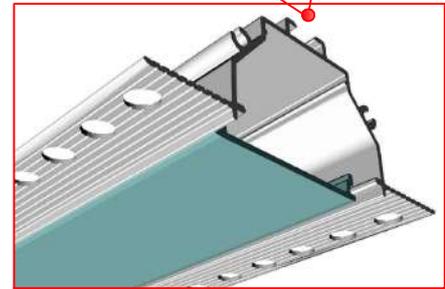


Specifically designed for drywall, a decorative recessed new product that can be seamlessly installed.

APPLICATION 1

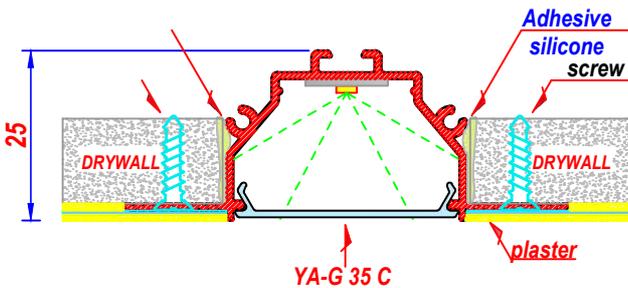

APPLICATION 2



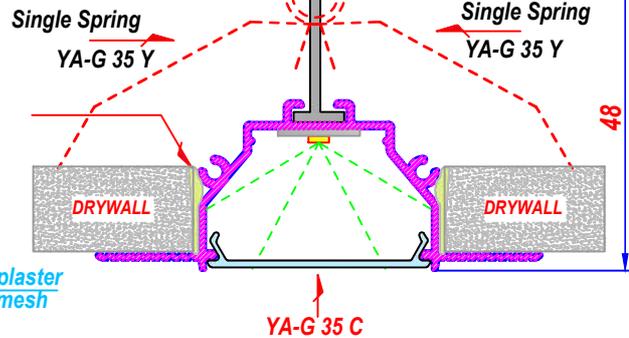


RECESSED - DRYWALL APPLICATION




All cutting dimensions and surface coatings can be done according to requirements

RECESSED - DRYWALL LED LIGHTING PROFILES AND ACCESSORIES

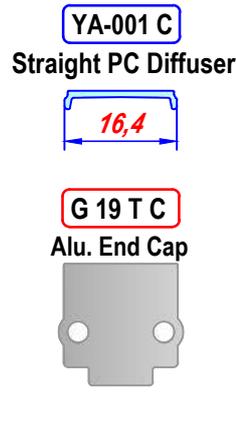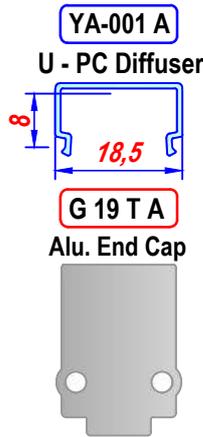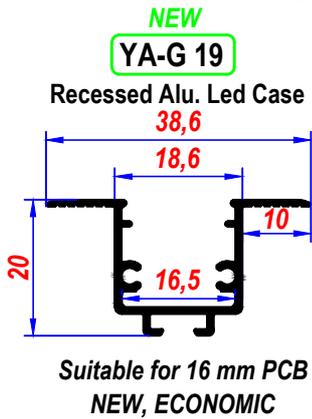






4 DIFFERENT DIFFUSER OPTION

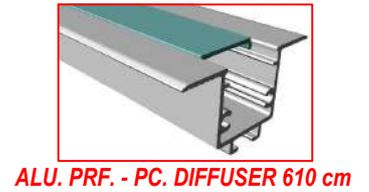



**YA-G 35 Y**  
Single Spring Retainer





APPLICATION

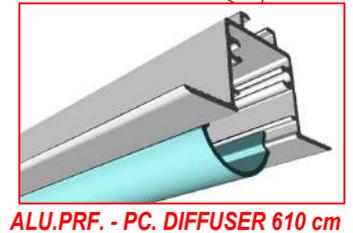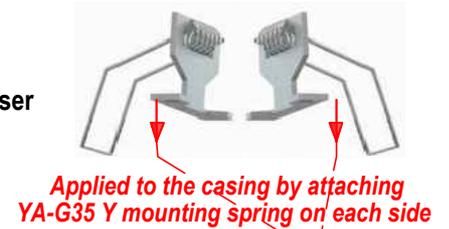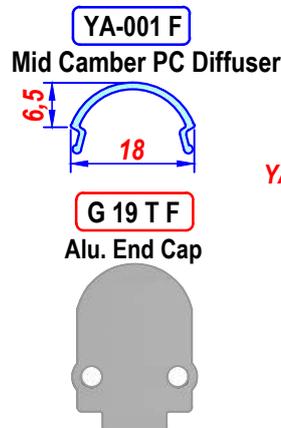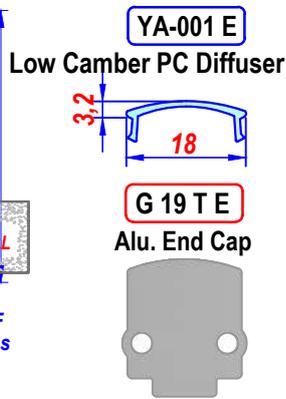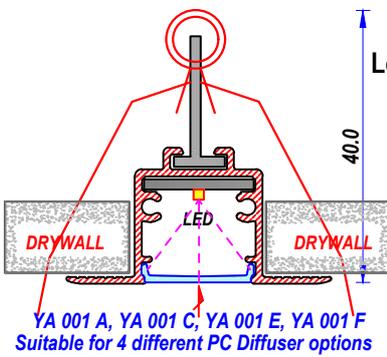



RECESSED - DRYWALL LED LIGHTING PROFILES AND ACCESSORIES

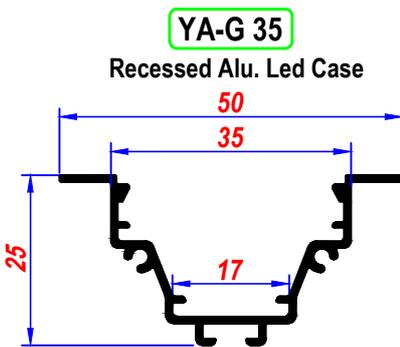

YA-G 35 ALU. - YA-G 35 C PC.

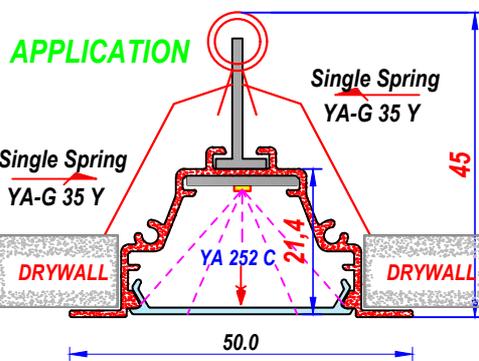
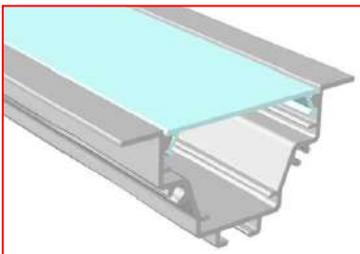


Single mounting spring is applied in the opposite direction during installation, with 2 pieces attached.

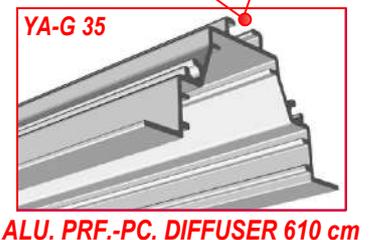
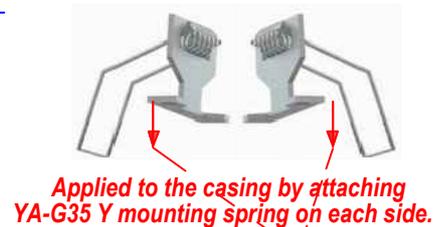


All cutting dimensions and surface coatings can be done according to requirements


**MULTI FUNCTIONAL RECESSED LED CASE**

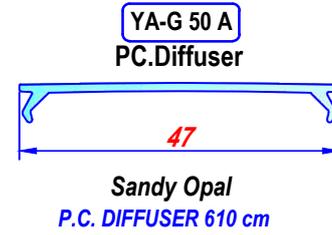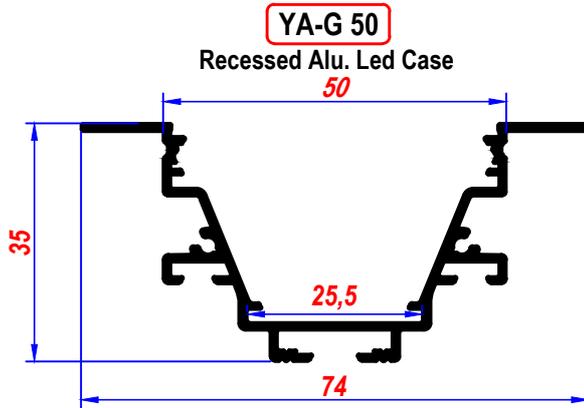


A new generation, economical, and decorative recessed product with 3 different mounting options

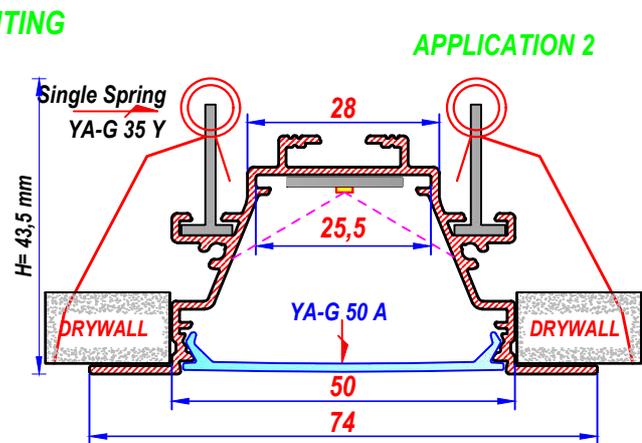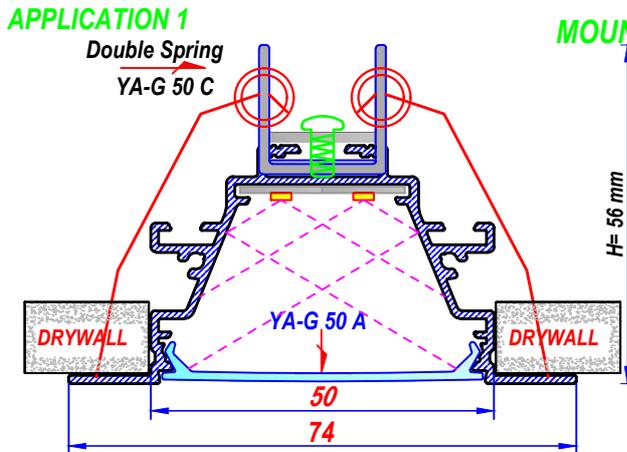

**3 DIFFERENT METHOD OF APPLICATION SYSTEM**

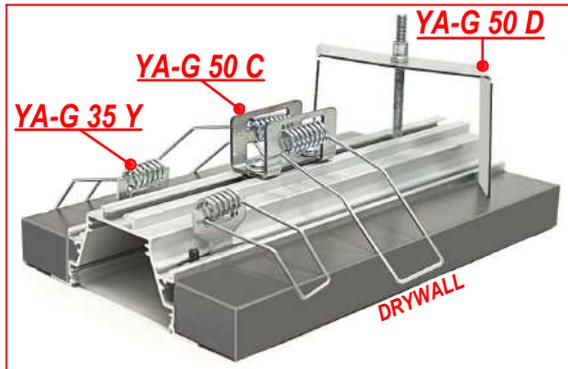

Also be mounted on drywall using the YA G 75 D accessory

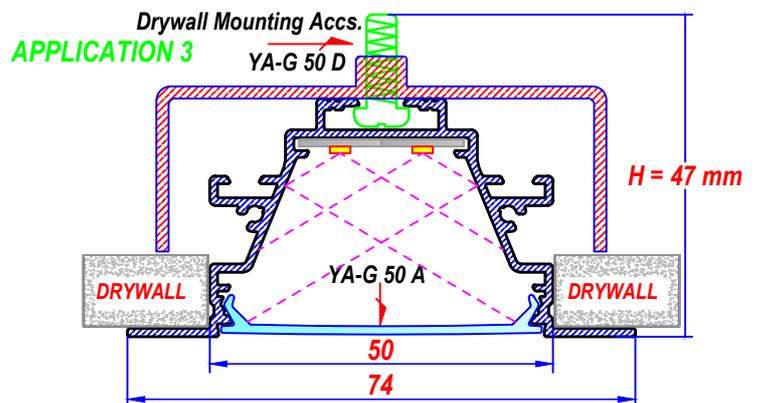


All cutting dimensions and surface coatings can be done according to requirements

MULTI FUNCTIONAL RECESSED LED CASE

**YA-G 60**

Recessed Alu. Led Case

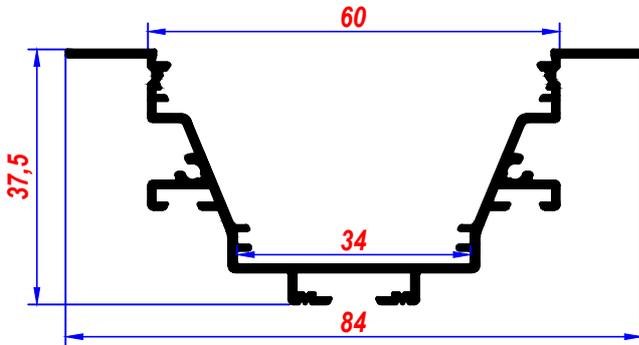

**YA-220 C**

PC.Diffuser



A new generation, economical, and decorative recessed product with 3 different mounting options

**YA-G 50 C**

Double Spring Retainer



Double Screw

**YA-G 35 Y**

Single Spring Retainer



Single Screw

**YA-G 50 D**


Drywall Mounting Acces. - Metal




1,5 mm Galvanized

**YA-G 50 T**



Alu. End Cap

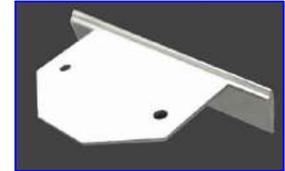


Thickness: 1,2 mm

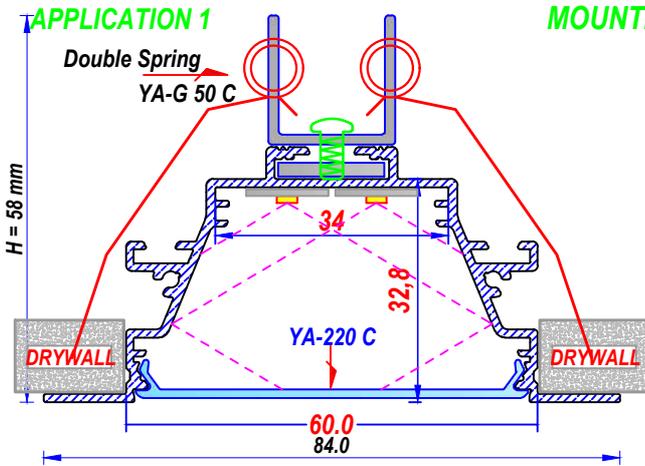

**MOUNTING**

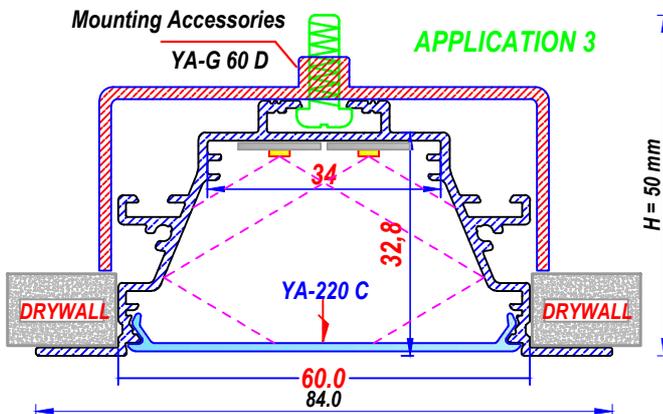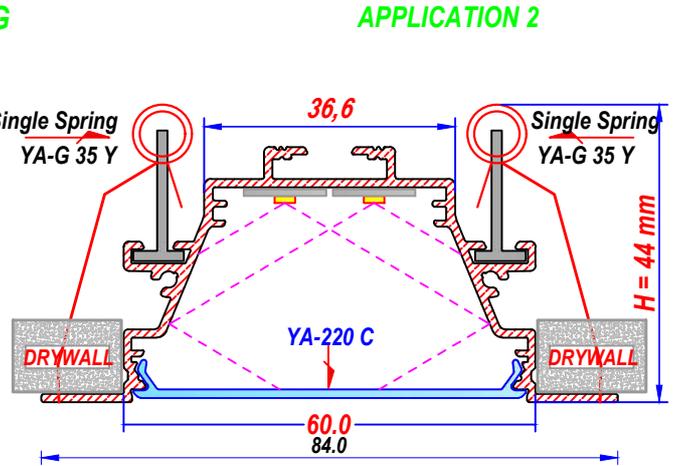

**3 DIFFERENT METHOD OF APPLICATION SYSTEM**

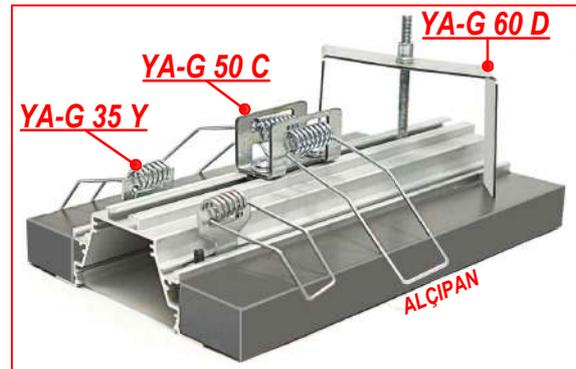


All cutting dimensions and surface coatings can be done according to requirements

RECESSED LED LIGHTING PROFILES AND ACCESSORIES

**YA-G 75**


Recessed Alu. Led Case

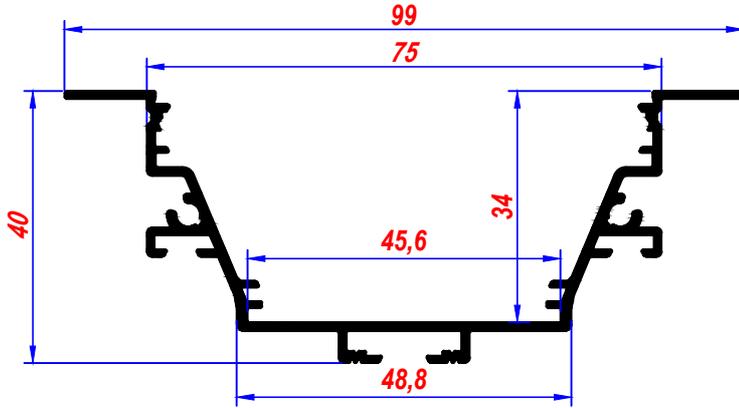

A new generation, economical, and decorative recessed product with 3 different mounting options


Decorative product can be mounted in drywall ceilings, recessed uninterruptedly

APPLICATION 1

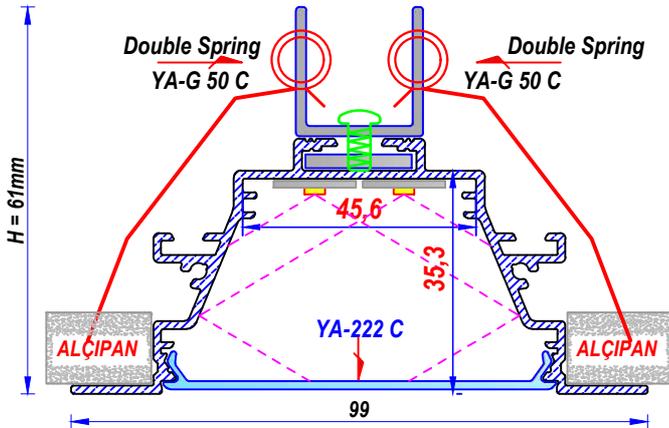


APPLICATION 2

MOUNTING

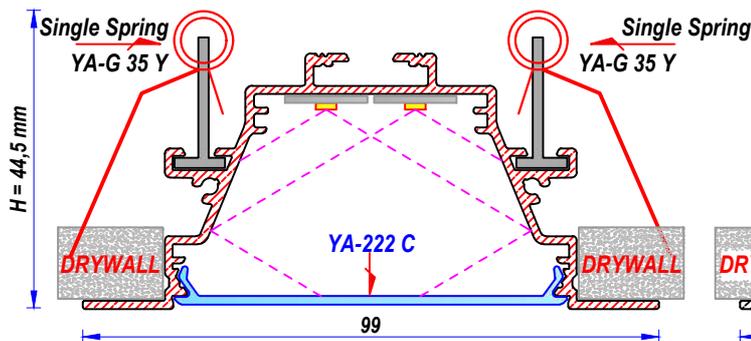

APPLICATION 3

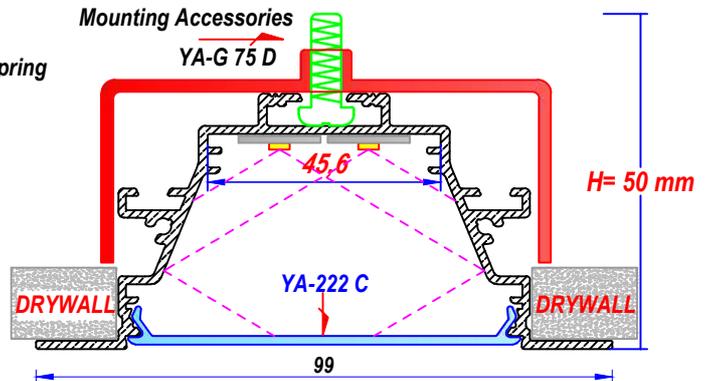

**YA-222 C**

PC.Diffuser



**YA-G 50 C**

Double Spring Retainer



**YA-G 35 Y**


Single Spring Retainer



2 DIFFERENT SPRING RETAINER FOR DRYWALL APPLICATION


**YA-G 75 T**

Alu. End Cap

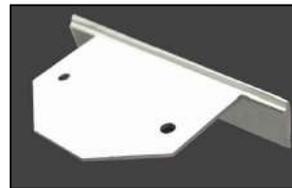


**YA-G 75 D**

Drywall Mounting Acces. - Metal

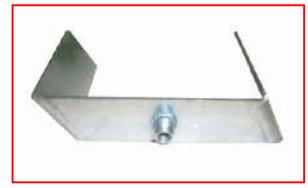



1,5 mm Galvanized

3 DIFFERENT METHOD OF APPLICATION SYSTEM

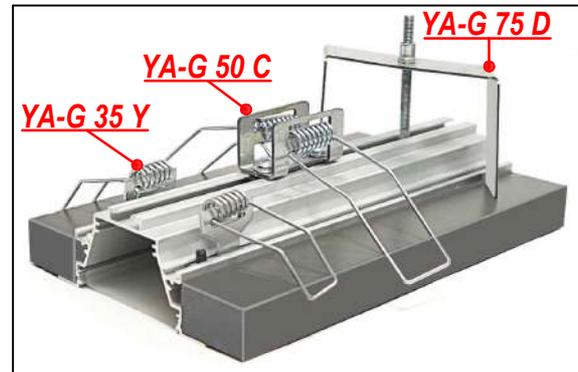



All cutting dimensions and surface coatings can be done according to requirements

RECESSED LED LIGHTING PROFILES AND ACCESSORIES

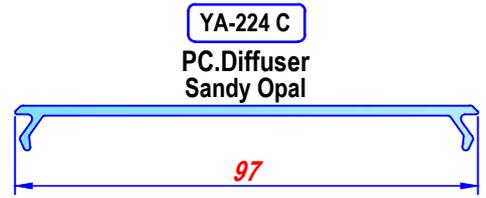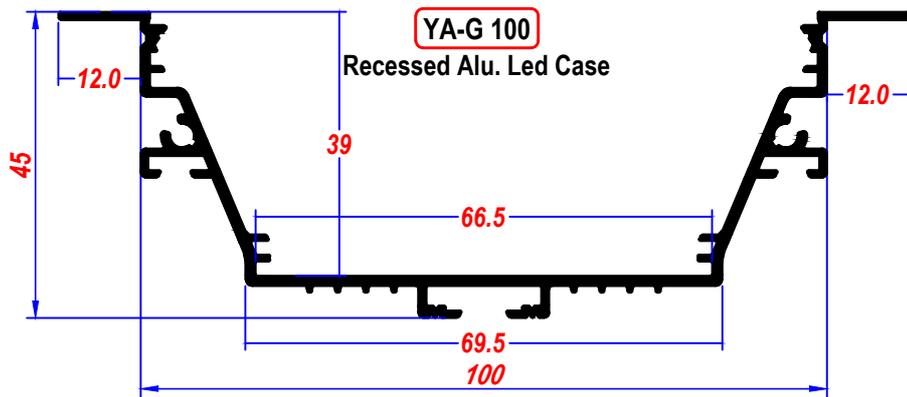


A new generation, economical, and decorative recessed product with 3 different mounting options

APPLICATION 1 MOUNTING WITH DOUBLE SPRING

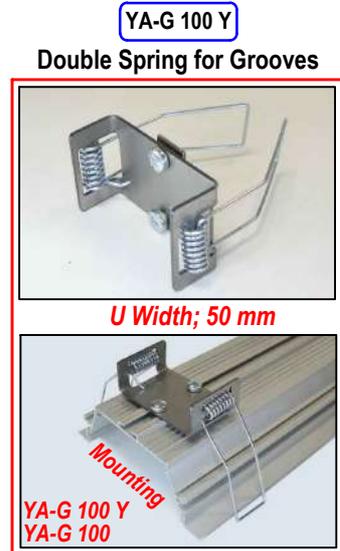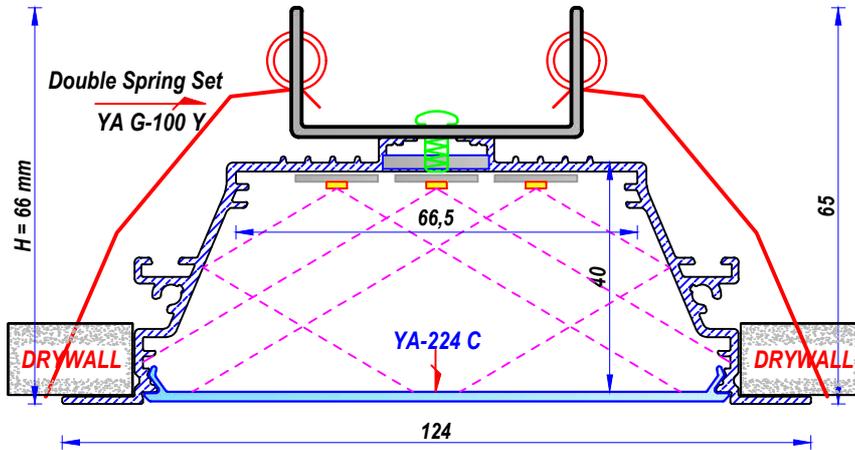


APPLICATION 1

APPLICATION 2 MOUNTING WITH SINGLE SPRING

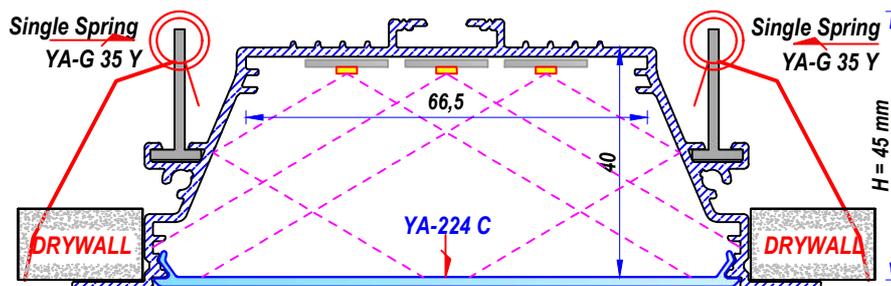

APPLICATION 2

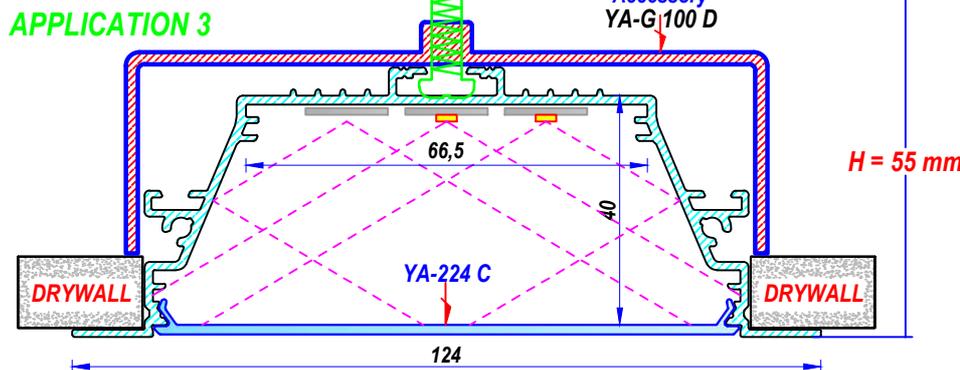

APPLICATION 3


All cutting dimensions and surface coatings can be done according to requirements

RECESSED LED LIGHTING PROFILES AND ACCESSORIES

NEW

YA-212

Recessed Alu. Led Case

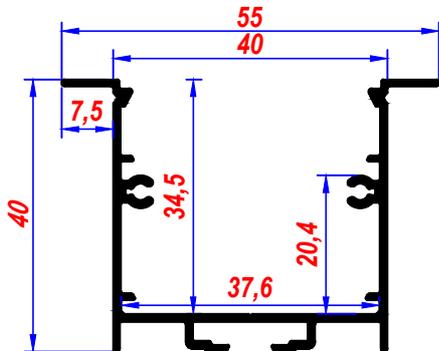

YA-213 C


PC.Diffuser




NEW

YA-213 U

PC.Diffuser

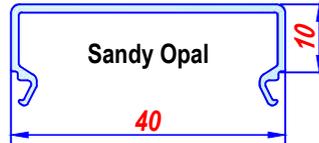

YA-212 ALU. - YA-1209 A PC

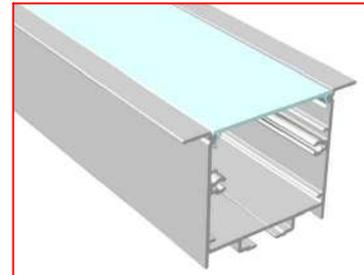

PC.DIFFUSER-ALU.PRF. 610 cm

YA-212 B

Alu. L End Cap



YA-1209 C

Alu. Slide Prf.



DECORATIVE NEW PRODUCT THAT CAN BE APPLIED SEAMLESSLY WITH TWO DIFFERENT EASY INSTALLATION METHODS

YA-212 A

Drywall Mounting Acces. - Metal



YA-G 50 C

Double Spring Retainer




Double Screw

APPLICATION 1 MOUNTING




Decorative product can be mounted in ceilings, wall & wood uninterruptedly  
Easy assembly, system suitable for, removing from drywall without detriment

APPLICATION 1

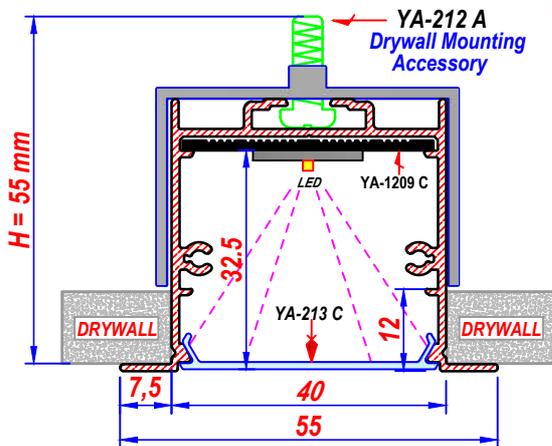



SCALE 1/1

APPLICATION 2

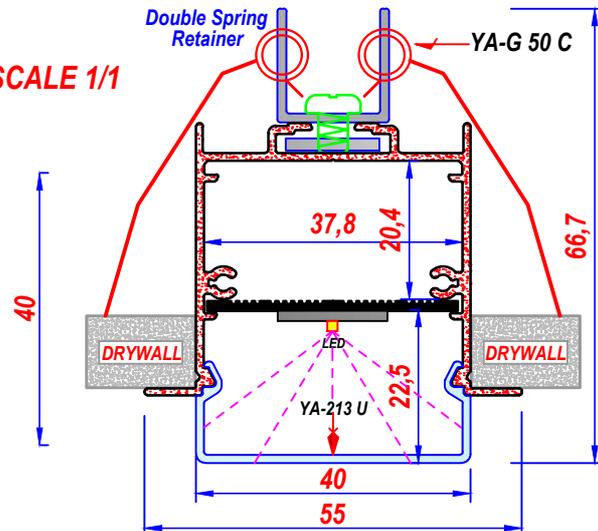


All cutting dimensions and surface coatings can be done according to requirements

RECESSED LED LIGHTING PROFILES AND ACCESSORIES

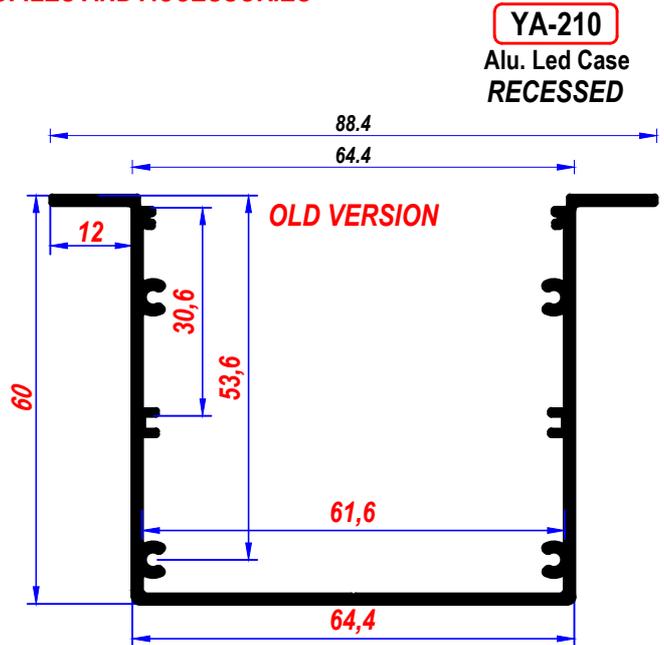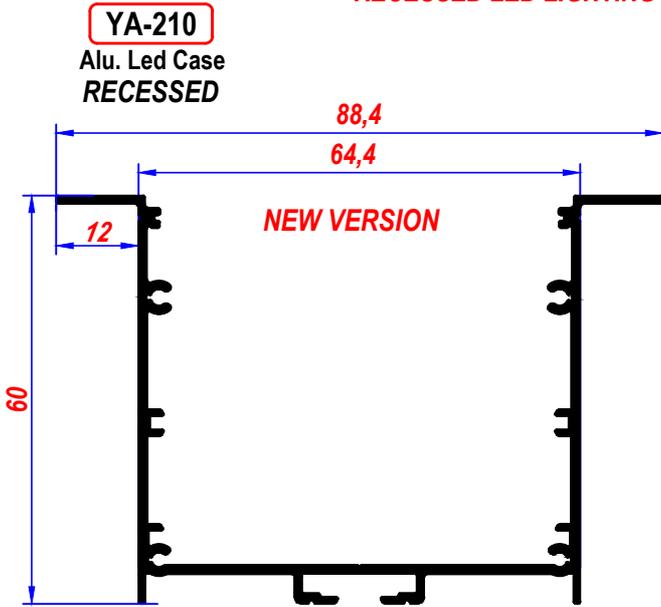


*Decorative product can be mounted in drywall ceilings, recessed uninterruptedly*

*Easy assembly, system suitable for, removing from drywall without detriment*

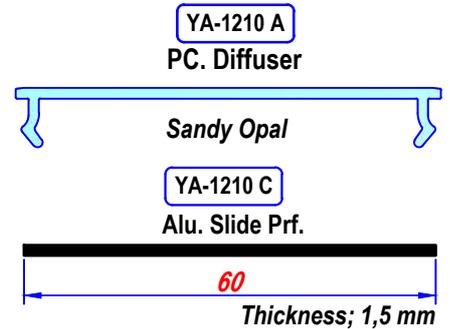

A new generation, economical, and decorative recessed product with 2 different mounting options

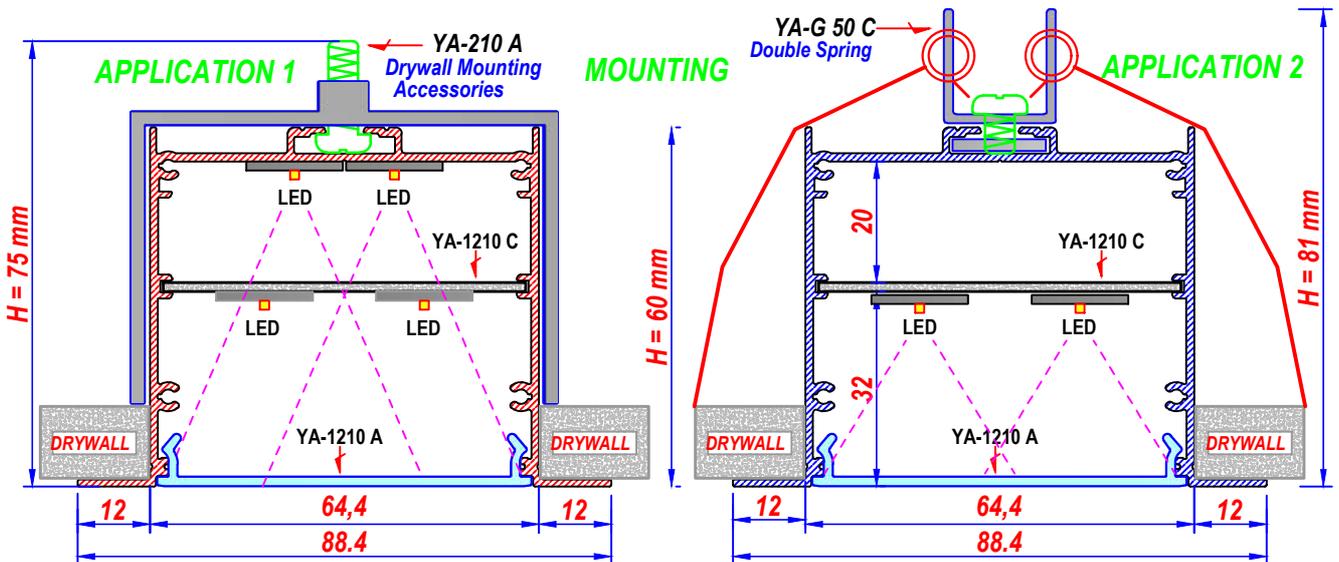


All cutting dimensions and surface coatings can be done according to requirements


**NEW SLIM, RECESSED ECONOMICAL LED LIGHTING PROFILES & ACCESSORIES**

**NEW**  
**YA-G75 EKO**

Recessed Alu. Led Case

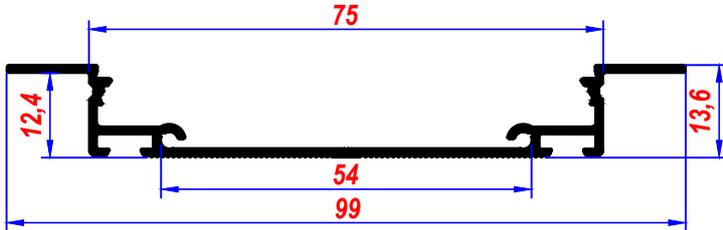


ALU. PRF. ve PC. DIFFUSER 610 cm.

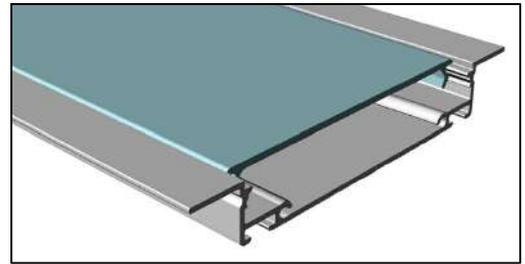

**MINIMUM HEIGHT, MAXIMUM EFFICIENCY**

**NEW RECESSED PRODUCT WITH LOW HEIGHT AND EXTRA-WIDE WIDTH**

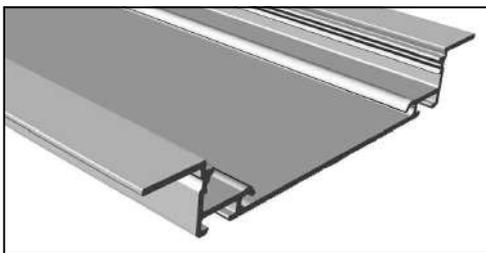

**YA-G75 ECO Alu.Prf. 610 cm**

**YA-222 C**

P.C.Diffuser



Sandy Opal

**YA-G 35 Y**


Single Spring for Grooves



Single Screw


**YA-G 75 EKO T**

Alu. L End Cap

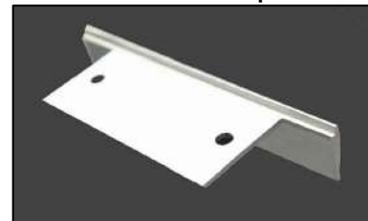

Thickness ; 1,2 mm

**CEILING APPLICATION**

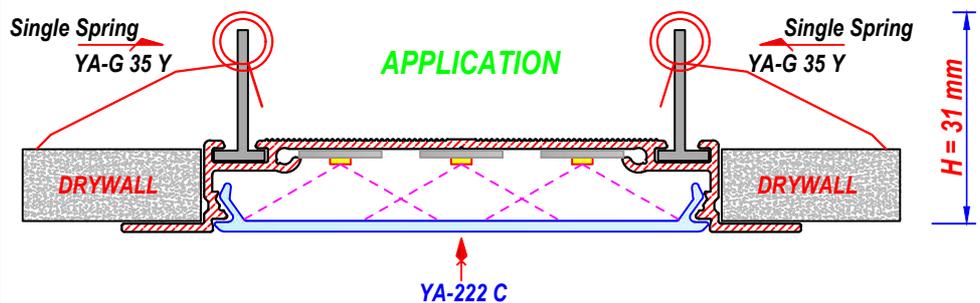


**A NEW DECORATIVE RECESSED (PLASTER-IN) PRODUCT THAT CAN BE APPLIED SEAMLESSLY, EMBEDDED INTO CEILING AND WALLS**

All cutting dimensions and surface coatings can be done according to requirements

RECESSED LED LIGHTING PROFILES AND ACCESSORIES


YA-211

Recessed Alu. Led Case

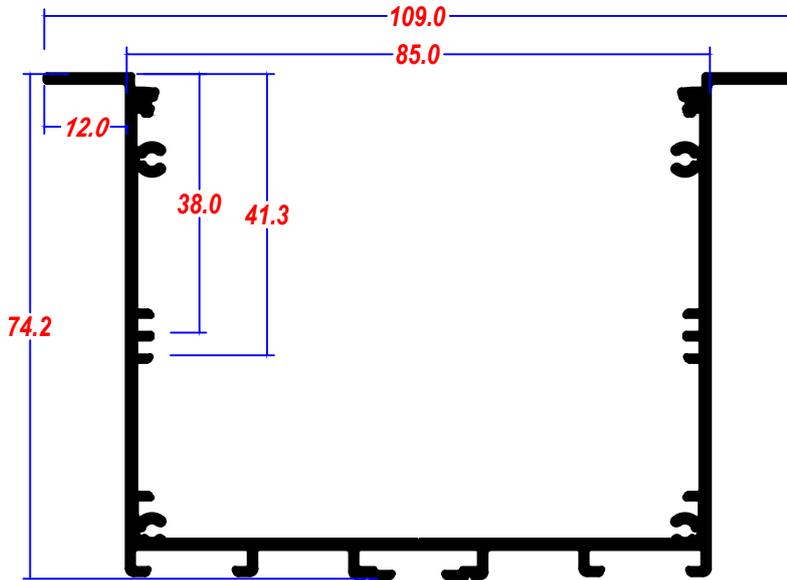

A new generation, economical, and decorative recessed product with 3 different mounting options

YA-211 ALU. - YA-209 A PC PRF.

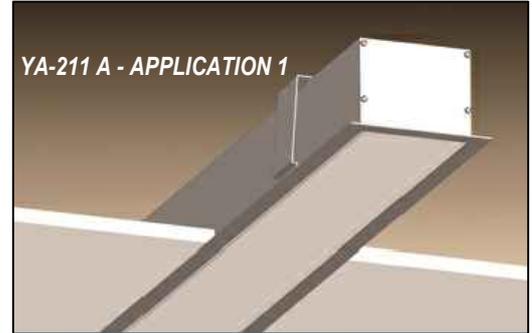

YA-209 A

P.C. Diffuser (Thin-Lined) Sandy Opal



YA-209 C

Alu. Slide Prf.

ALU.PRF.610 cm



Decorative product can be mounted in drywall ceilings, recessed uninterruptedly

YA-211 A

Drywall Mounting Acces. - Metal

1,5 mm Galvanized



YA-G 50 C

Double Spring Retainer




YA-211 B


Alu. End Cap




YA-211 ALU. - YA-209 A PC PRF.

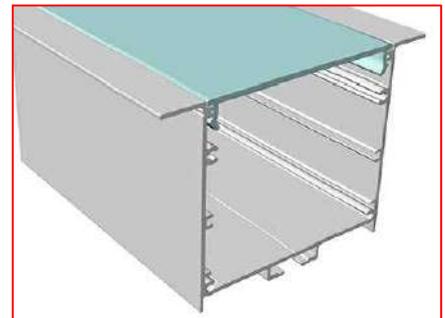

APPLICATION 1

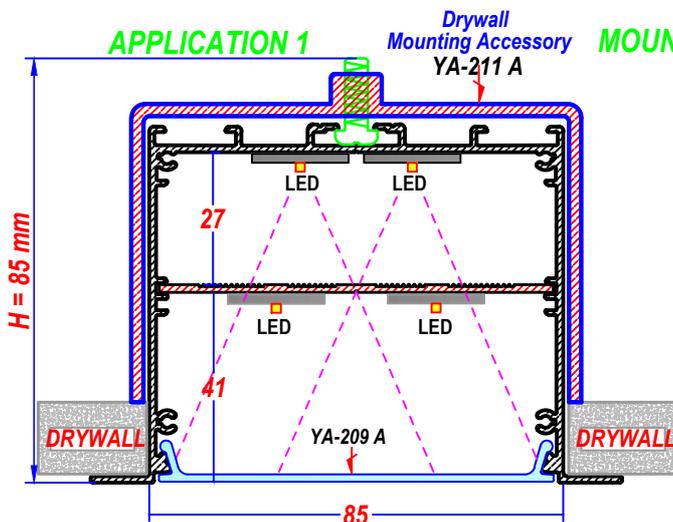


APPLICATION 2

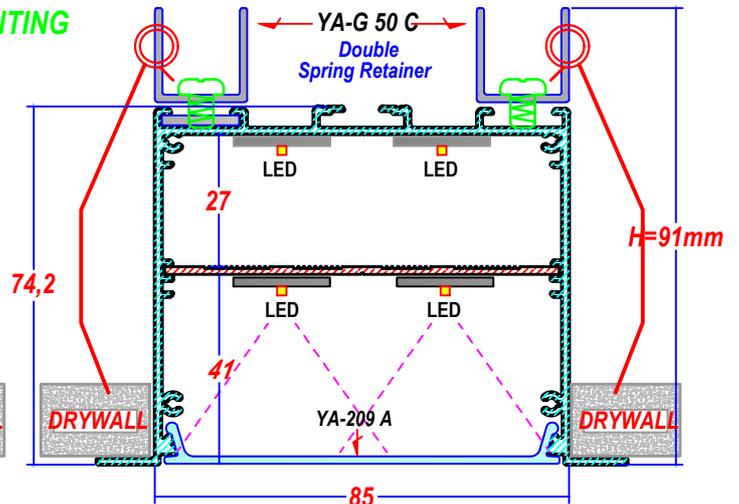





All cutting dimensions and surface coatings can be done according to requirements

**INDOOR, SURFACE-MOUNTED ALUMINUM LED PROFILE AND ACCESSORIES**

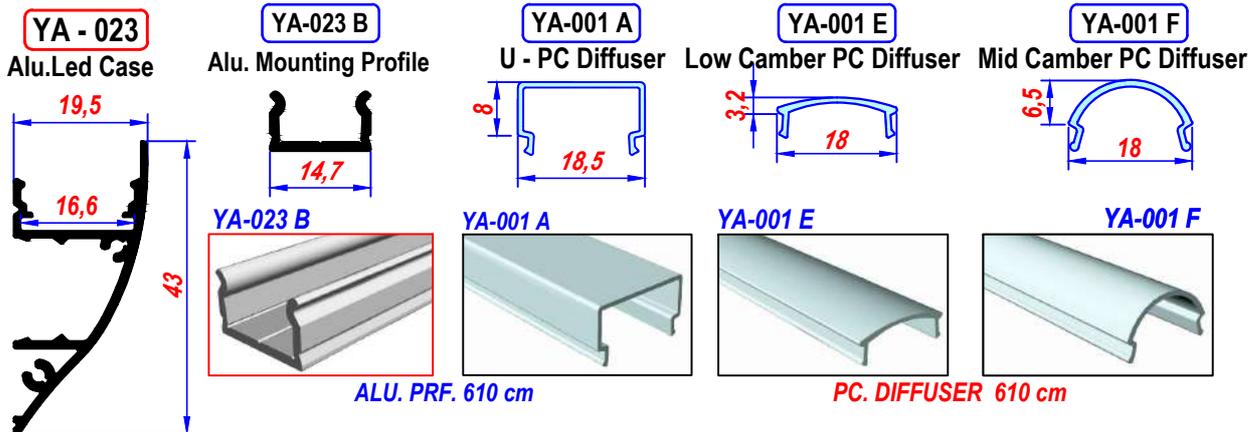




**APPLICATION AREAS**

Decorative product suitable for use in furniture, skirting, wall, border, wall.

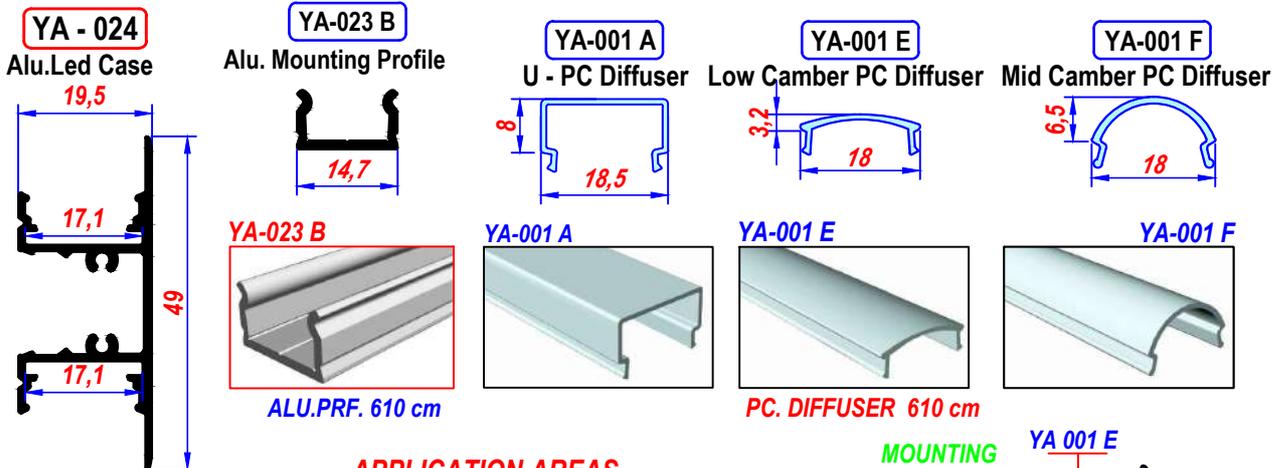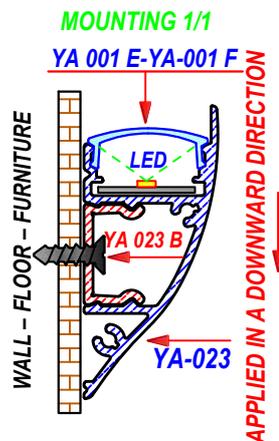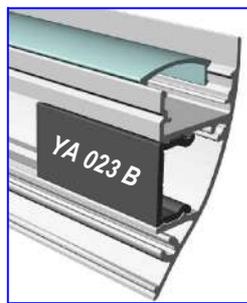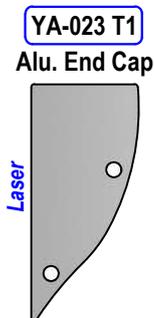




**APPLICATION AREAS**

Decorative product suitable for use in furniture, skirting, wall, border, wall.

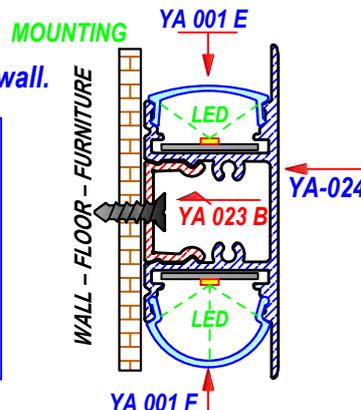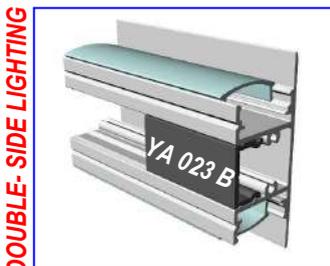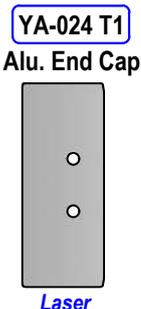


All cutting dimensions and surface coatings can be done according to requirements

**DOUBLE - SIDE LINEAR LIGHTING**

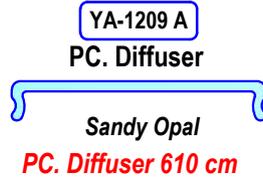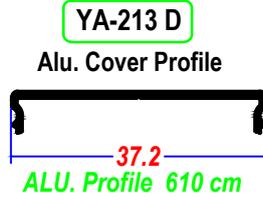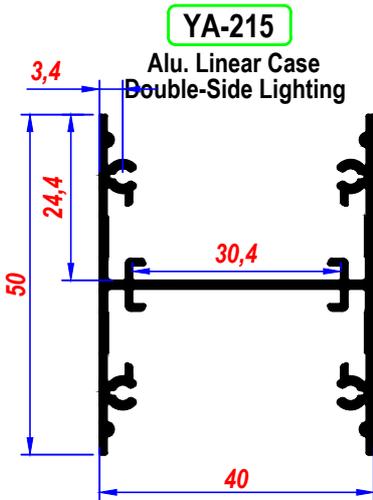


**YA-215 LED U PROFILE**

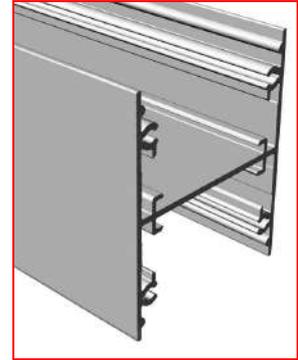

ALU. PRF. 610 cm


**YA-215 T**  
Alu. L End Cap

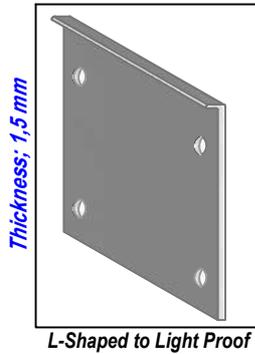

Required color can be produced

**USAGE AREAS**

Indoor, suspended with hanging accessories,  
Directly fixing to the ceiling and wall with screws,

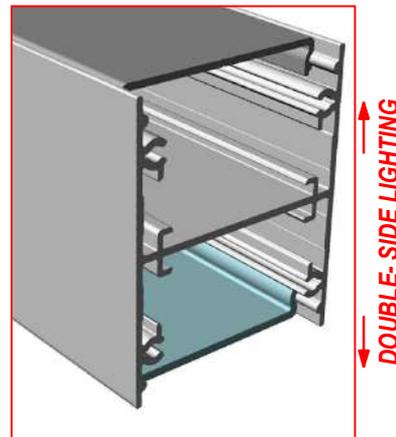


PC.DIFFUSER - ALU. PRF. 610 cm

VERTICAL METAL INNER  
CORNER APPARATUS




- YA-218 K1 30° Metal Corner
- YA-218 K2 45° Metal Corner
- YA-218 K3 60° Metal Corner
- YA-218 K4 90° Metal Corner
- YA-218 K5 120° Metal Corner
- YA-218 K6 135° Metal Corner
- YA-218 K7 150° Metal Corner

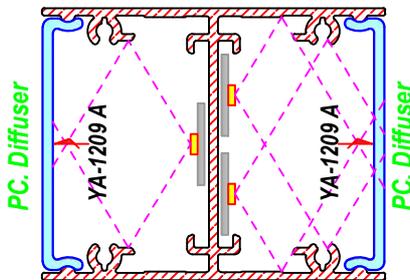


**APPLICATION 2** PENDANT LIGHTING


YA-207 D  
Conductive Fastener

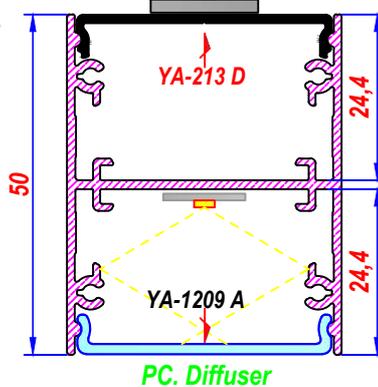


**APPLICATION 3**

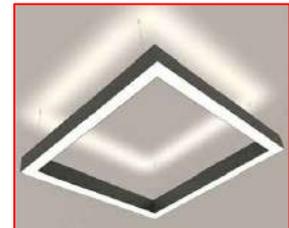

**APPLICATION 3**  
PC. Diffuser

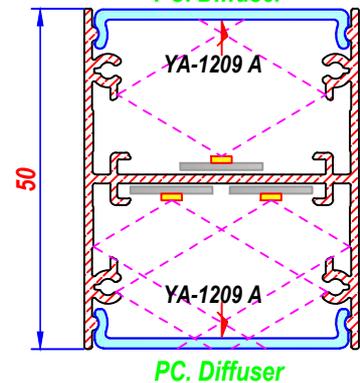


**APPLICATION 1** FIXING ON CEILING-WALL



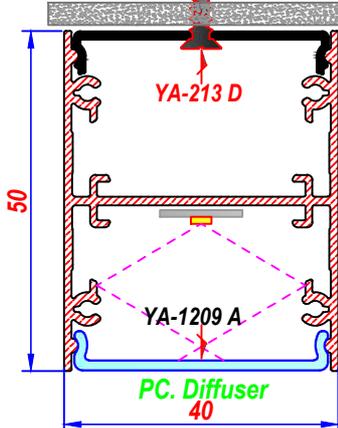


All cutting dimensions and surface coatings can be done according to requirements

MULTI-PURPOSE LINEAR LIGHTING PROFILES & ACCESSORIES

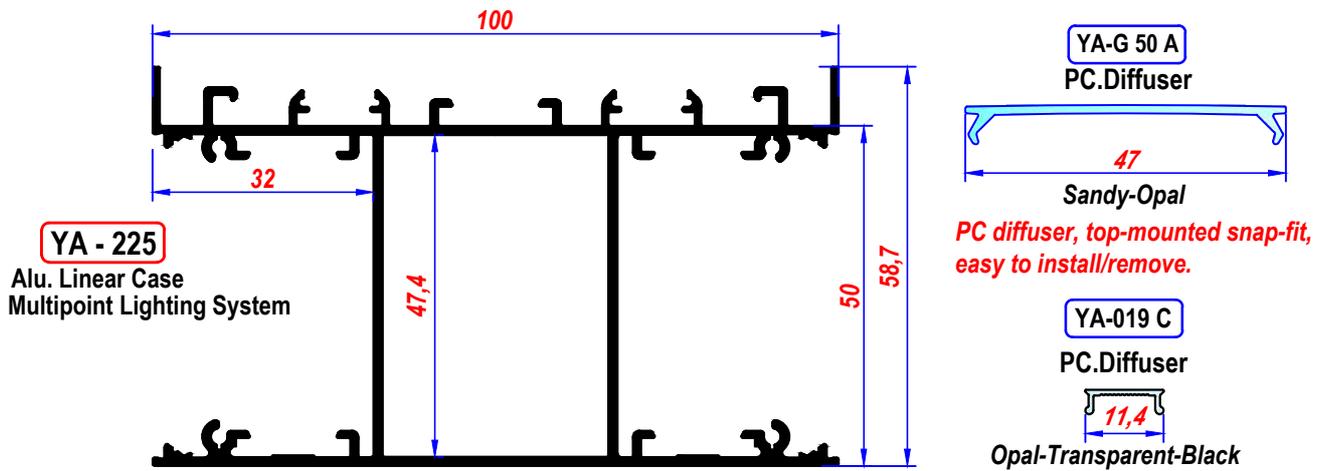


YA-225 Aluminum Profiles and Accessories

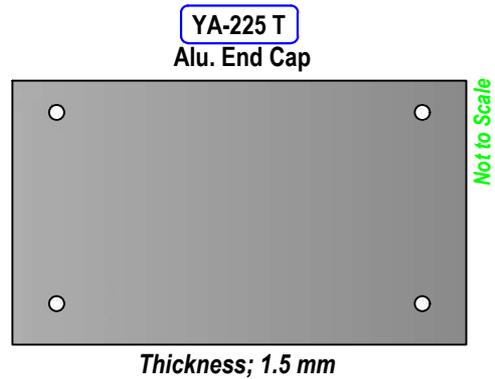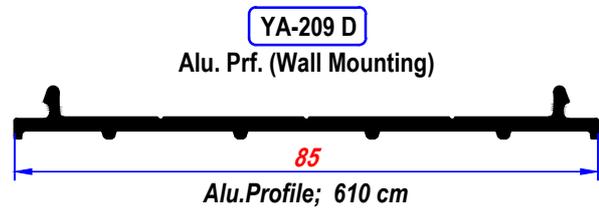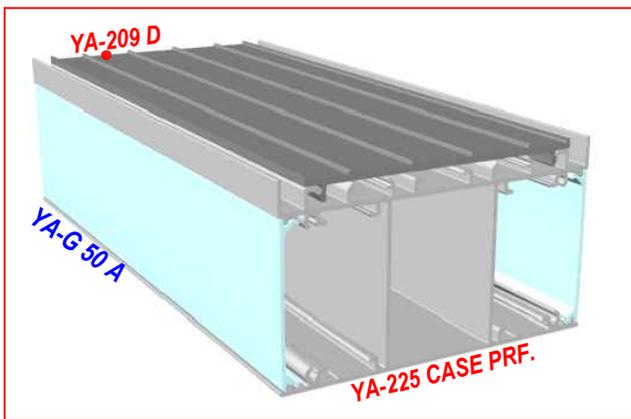

METHODS OF APPLICATION


Indoor pendant lighting or fixing to Ceiling-wall with screw on surface

Suitable for; lighting from 4 points in pendant, 2 points in ceiling mounting.

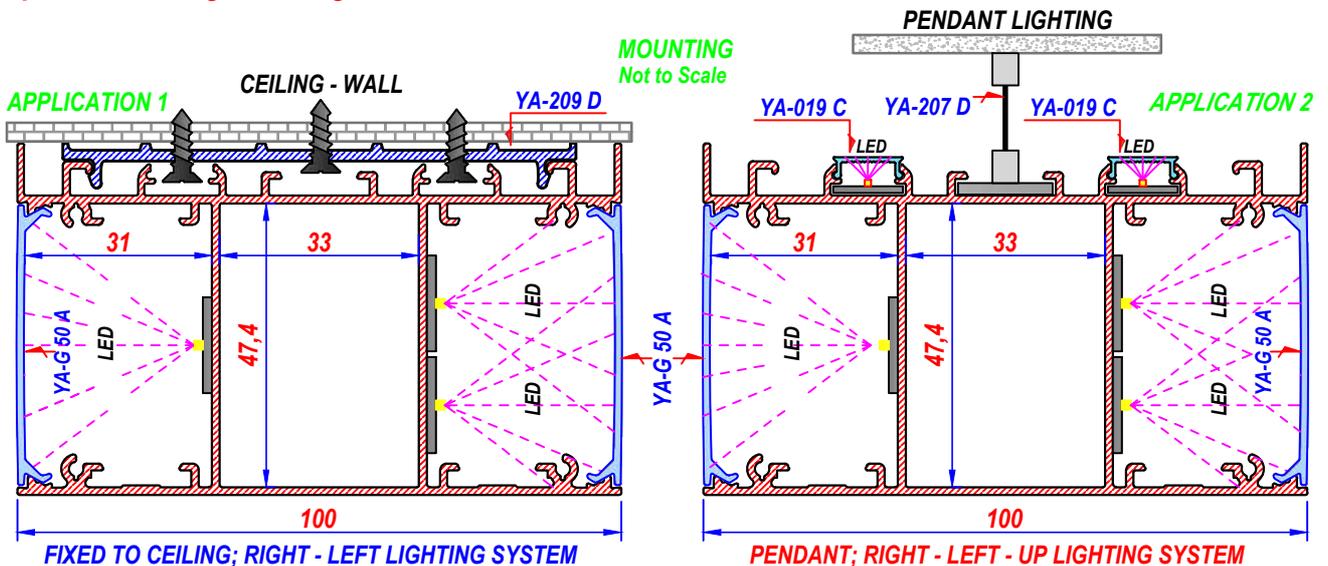


All cutting dimensions and surface coatings can be done according to requirements

NEW DOUBLE - SIDE LINEAR LIGHTING

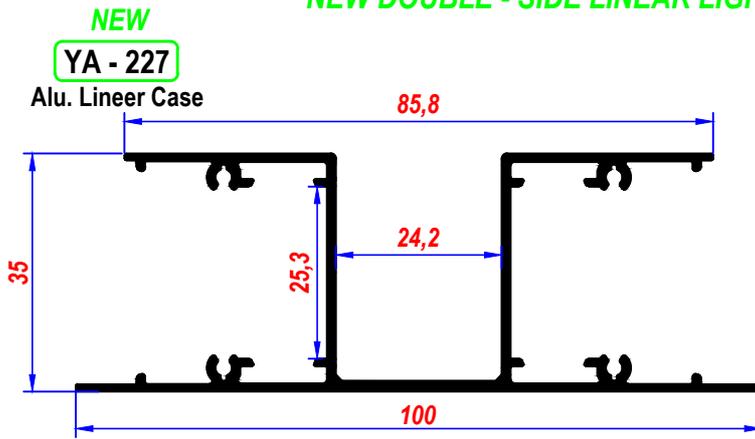

YA-227 ALU.PRF. 610 cm

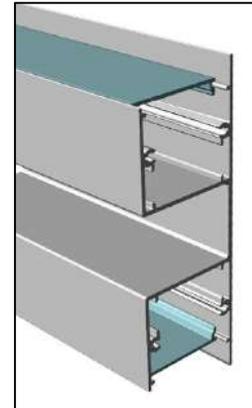

YA-G35 C PC.Prf. 610 cm


**YA-G 35 C**  
PC.Diffuser



PC diffuser, top-mounted snap-fit, easy to install/remove.

**YA-227 D**

Ceiling Mounting Bracket



Thickness; 1.5 mm

**YA-227 T**

Alu. End Cap



Thickness; 1.5 mm

**YA-207 D**

Ceiling Suspension Bracket



SINGLE - CHROME

**YA-207 D1**




DOUBLE - CHROME

Standard Wire: 1.5 mt  
Custom wire length can be ordered.

**APPLICATION AREAS;**


INDOOR, PENDANT INSTALLATION WITH SUSPENSION ACCESSORIES, OR SURFACE-MOUNTED TO CEILING / WALL WITH SCREWS.

CEILING - PENDANT

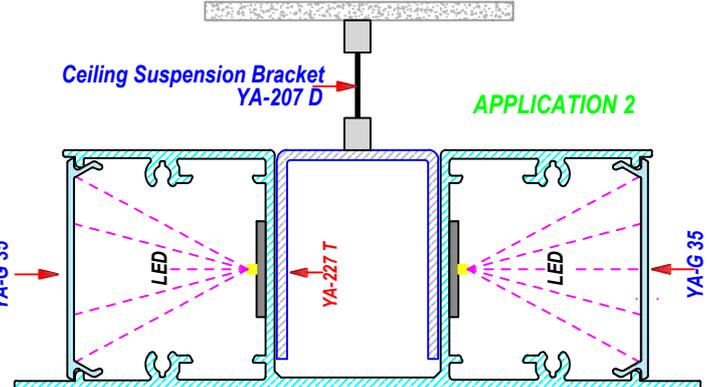

PENDANT; TWO-POINT LED LIGHTING

CEILING / WALL MOUNTING

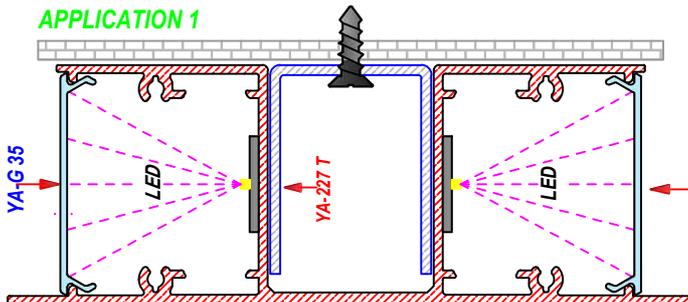

CEILING / WALL MOUNTING; TWO-POINT LED LIGHTING



INDOOR, HORIZONTAL INSTALLATION

Decorative frames can be produced in various shapes using metal corner connectors at different angles.

METAL INTERNAL CORNER CONNECTORS



Width ; 12 mm

**YA-218 K1** 30° Metal Corner

**YA-218 K2** 45° Metal Corner

**YA-218 K3** 60° Metal Corner

**YA-218 K4** 90° Metal Corner


**YA-218 K5** 120° Metal Corner

**YA-218 K6** 135° Metal Corner


**YA-218 K7** 150° Metal Corner

PRODUCTION CAN BE MADE IN CUSTOM SHAPES, ANGLES, AND COLORS WITH LINEAR PROFILES


TREE

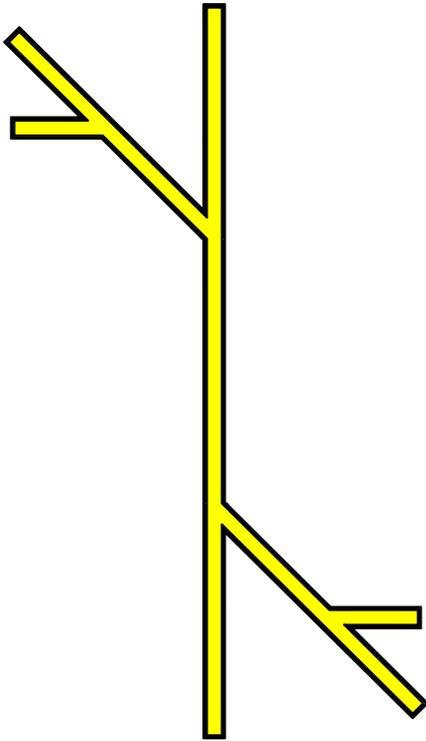


ARROW

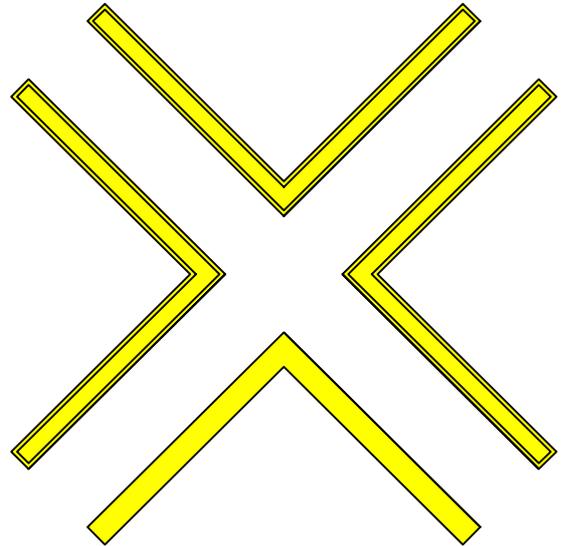

STAR

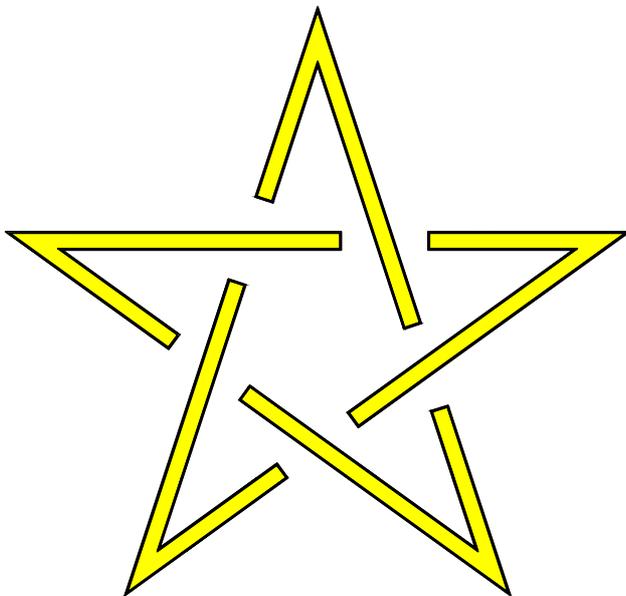


SELJUK PATTERN

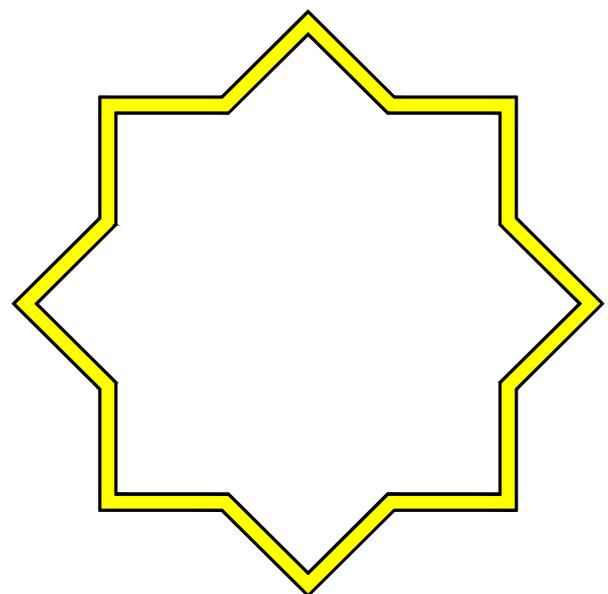

PRODUCTION CAN BE MADE IN CUSTOM SHAPES, ANGLES, AND COLORS WITH LINEAR PROFILES


SPEAR

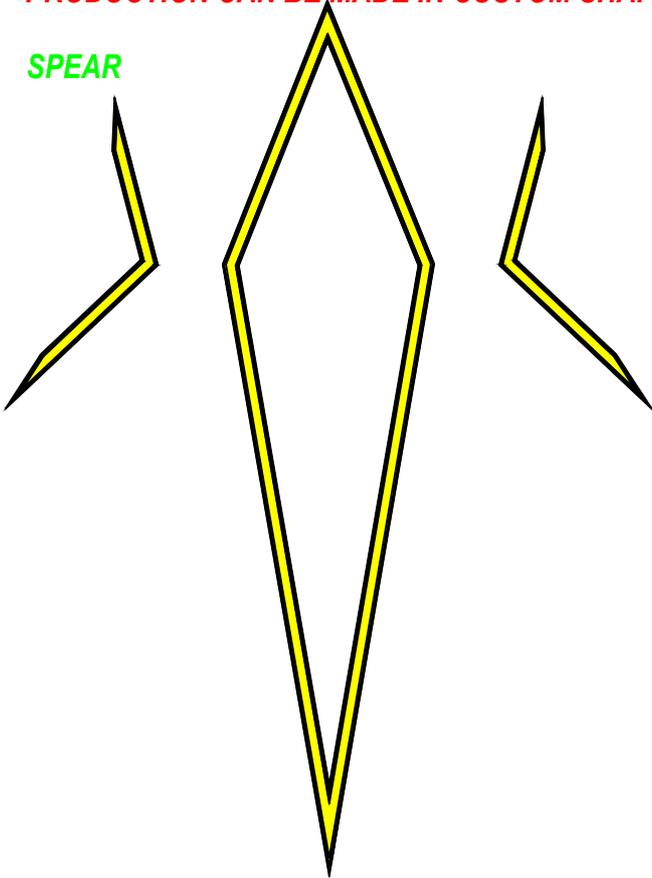

DIAMOND




TECHNO

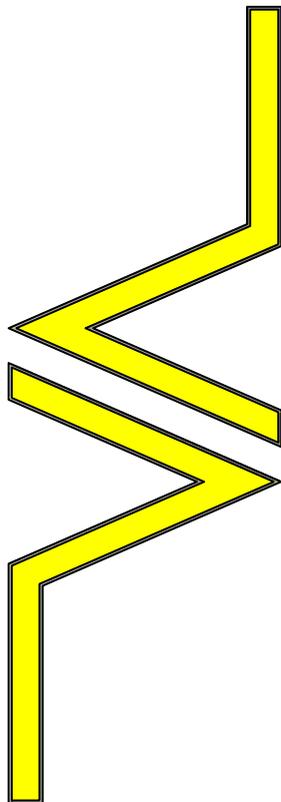


ZIGZAG

AVAILABLE IN 60°, 90°, AND 120° ANGLES


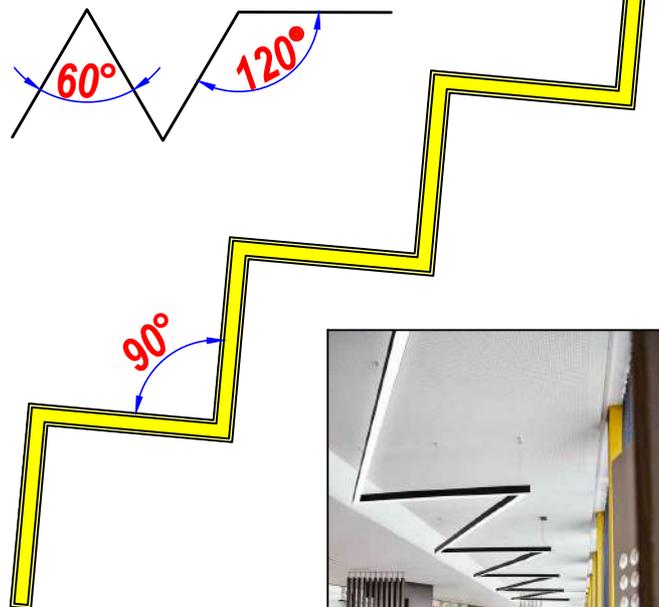


PRODUCTION CAN BE MADE IN CUSTOM SHAPES, ANGLES, AND COLORS WITH LINEAR PROFILES


MOLECULE

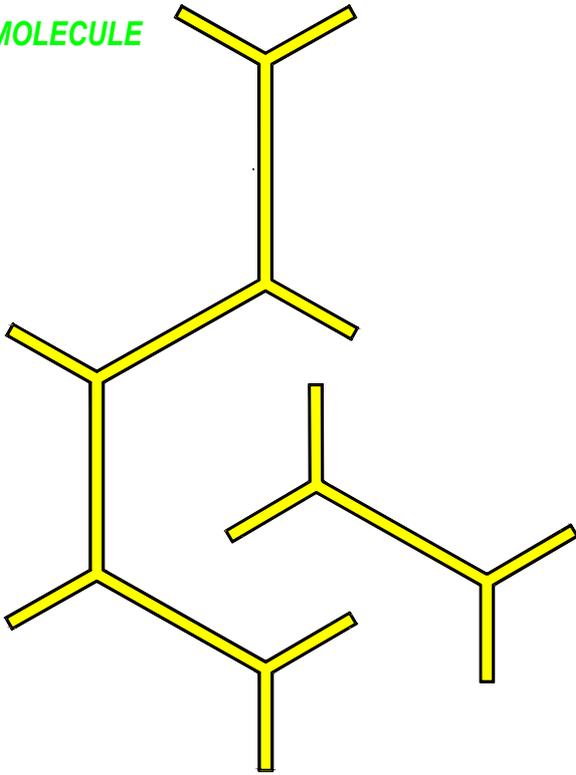


HONEYCOMB

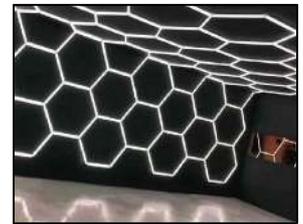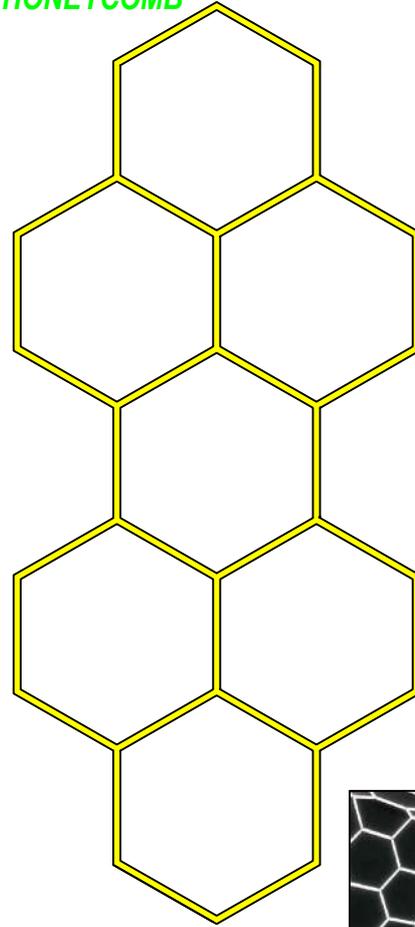

NESTED SQUARES

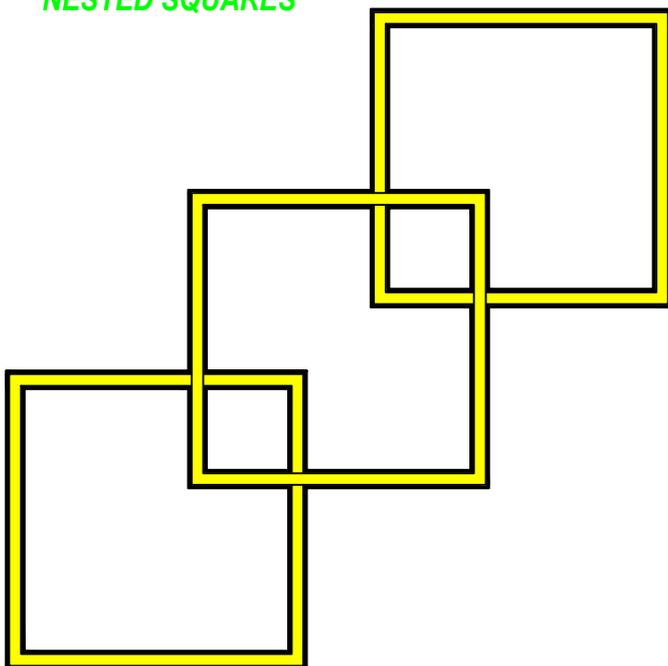


GRID

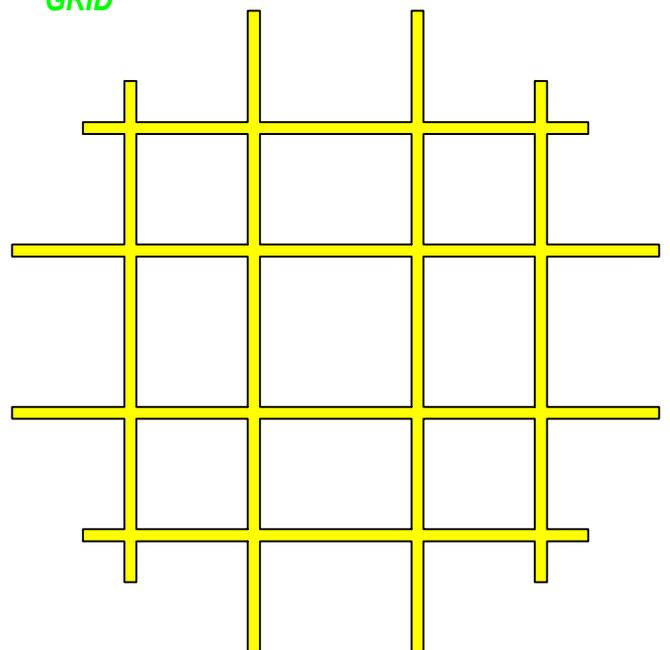


PRODUCTION CAN BE MADE IN CUSTOM SHAPES, ANGLES, AND COLORS WITH LINEAR PROFILES

A SHAPE

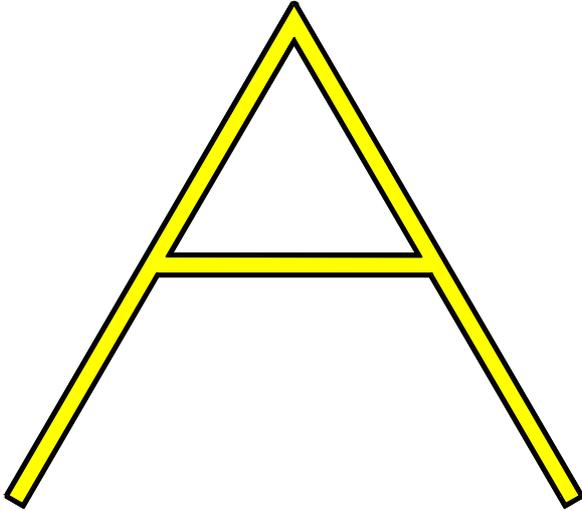


AVAILABLE IN DIFFERENT LETTERS UPON REQUEST


X SHAPE

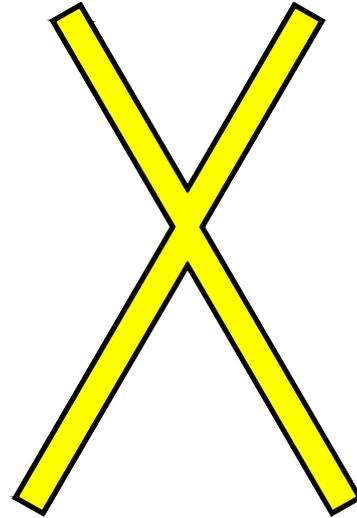

CHECK

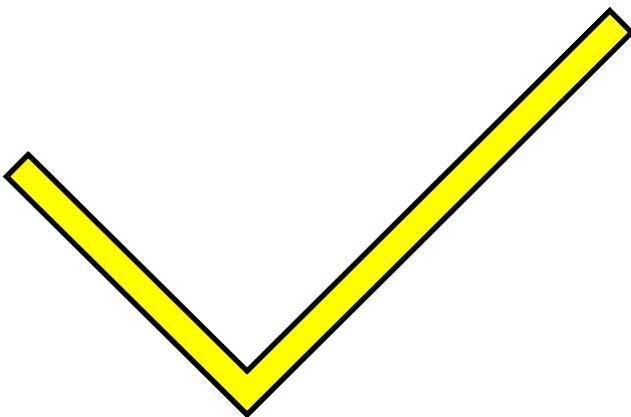


M SHAPE

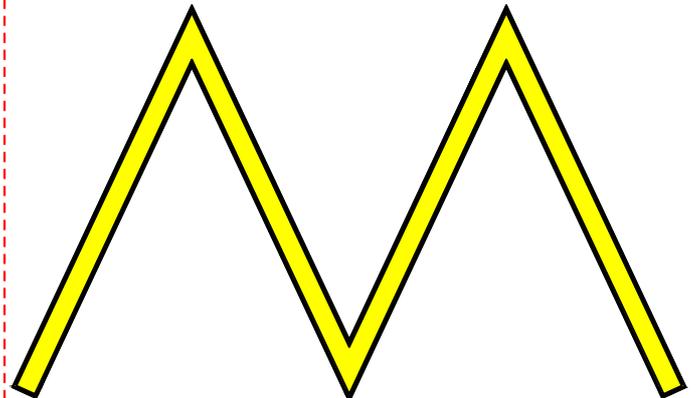


PRODUCTION CAN BE MADE IN CUSTOM SHAPES, ANGLES, AND COLORS WITH LINEAR PROFILES


INVERTED CORNER

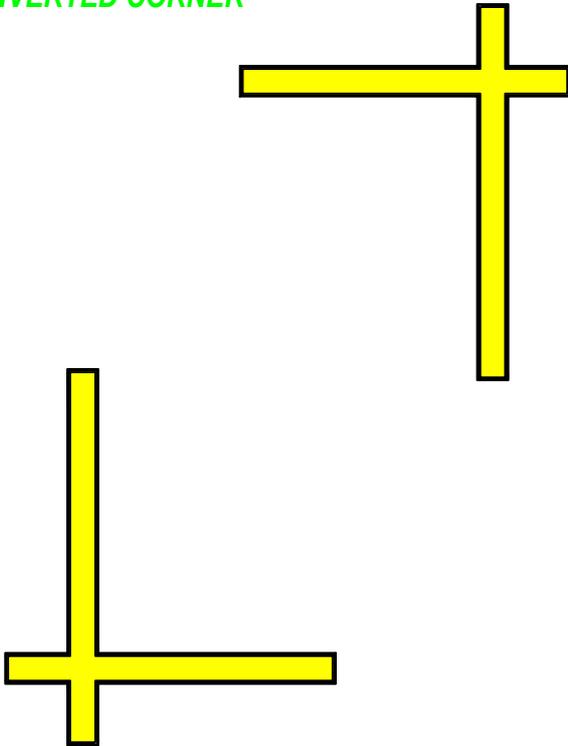


STRETCHED HEXAGON STRETCHED OCTAGON

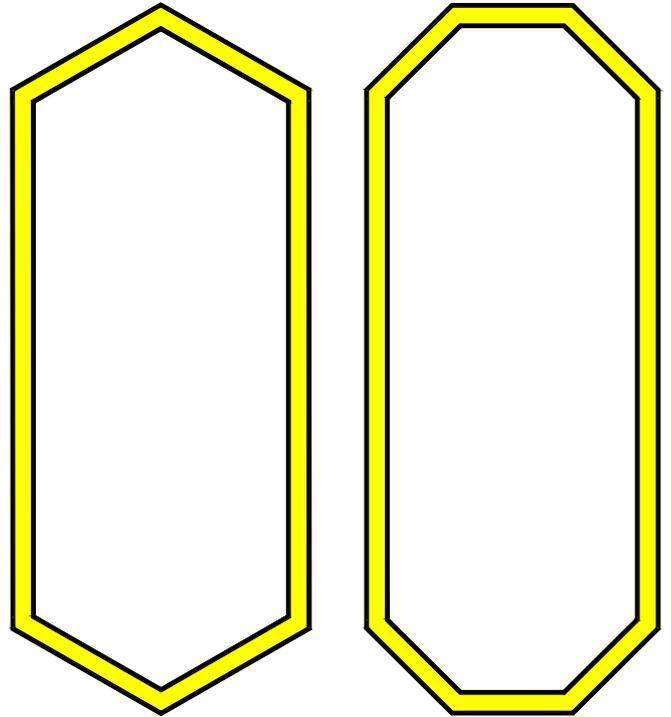

PUZZLE

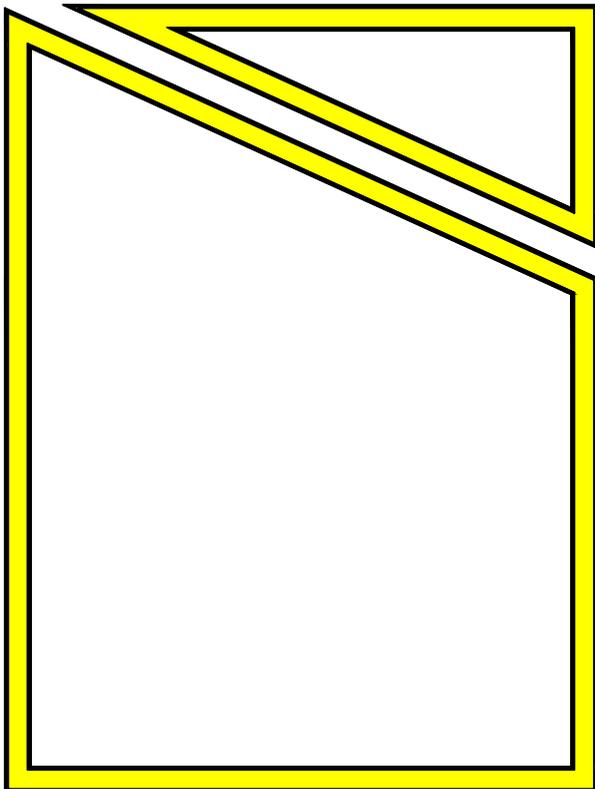

HEXAGON

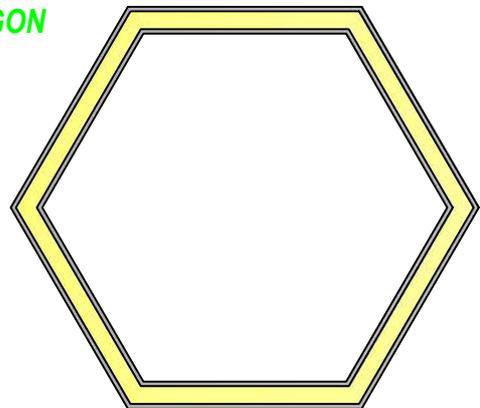


OCTAGON




PRODUCTION CAN BE MADE IN CUSTOM SHAPES, ANGLES, AND COLORS WITH LINEAR PROFILES





LABYRINTH

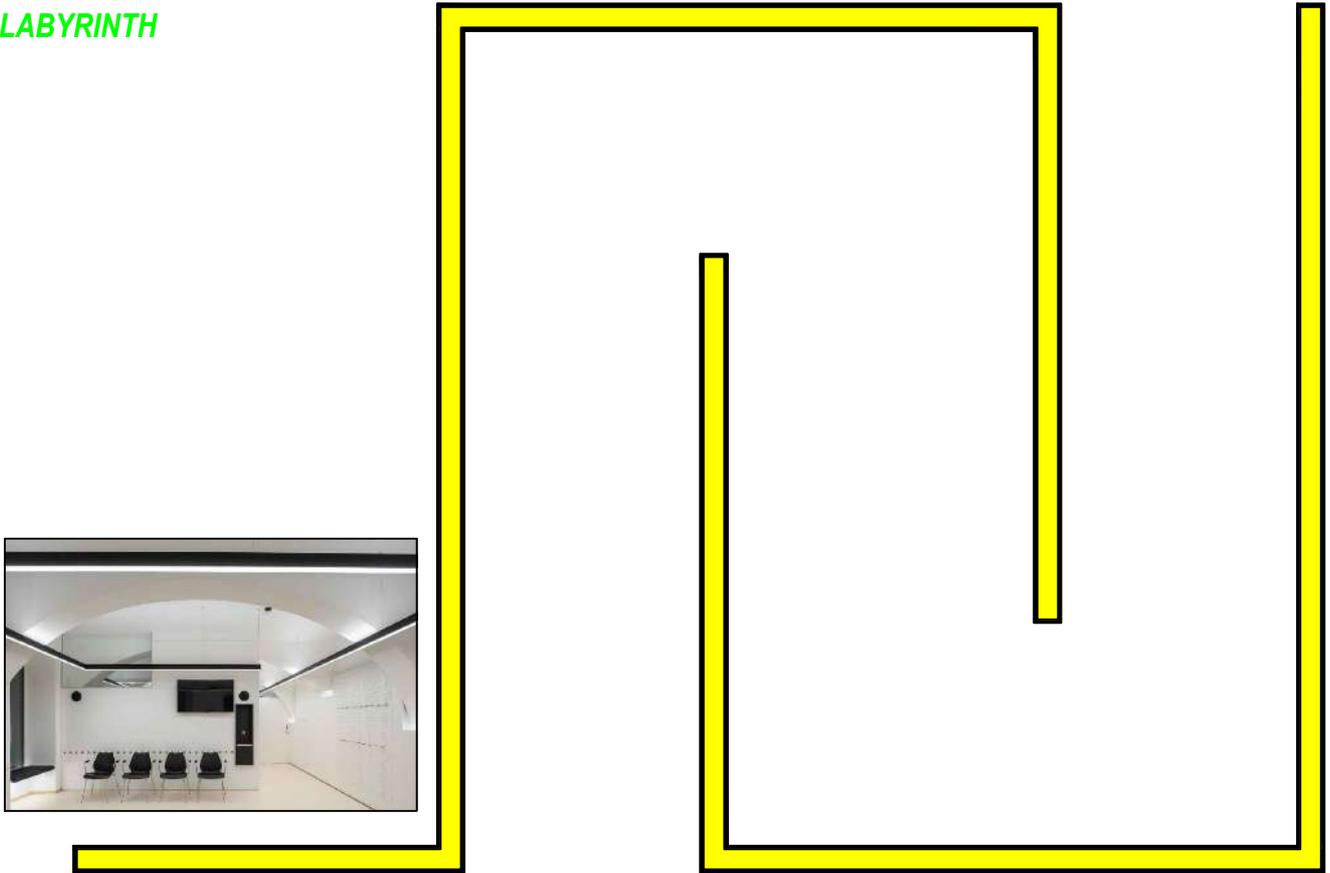




TUNNEL

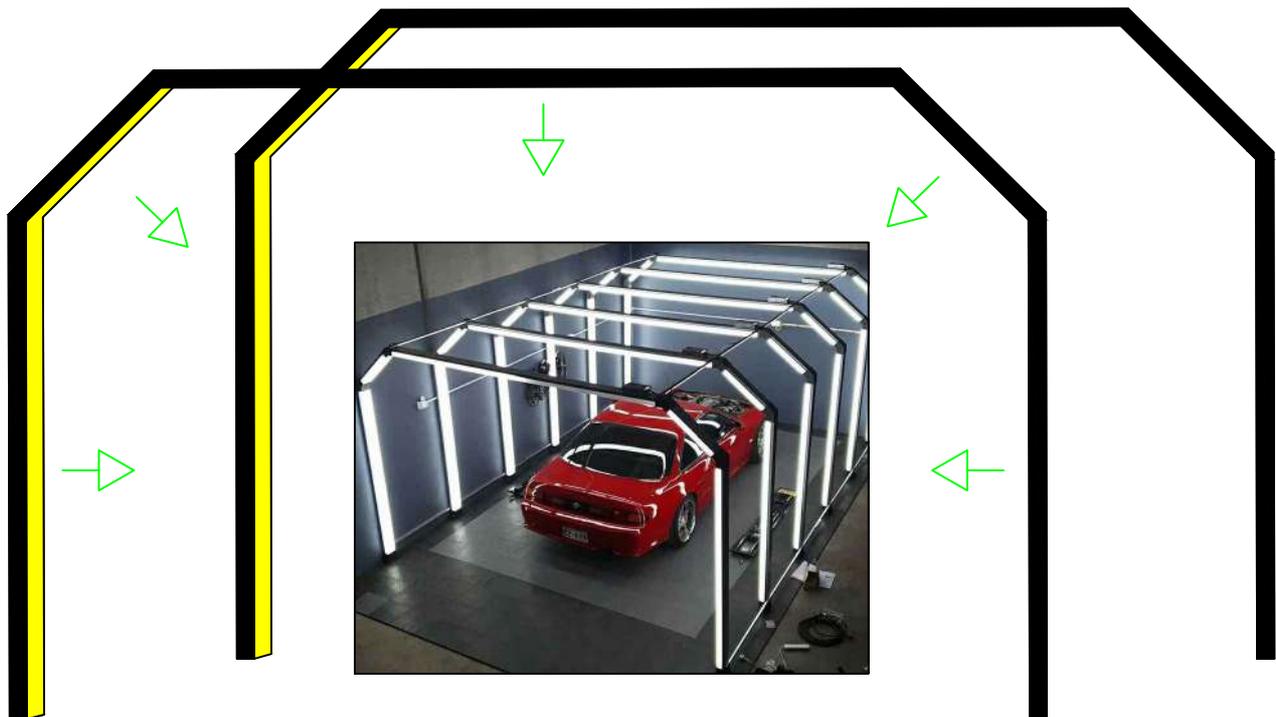

**ECONOMICAL SLIM LINEAR LED LIGHTING**

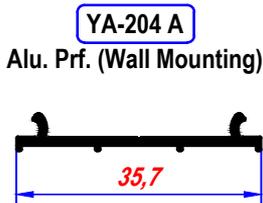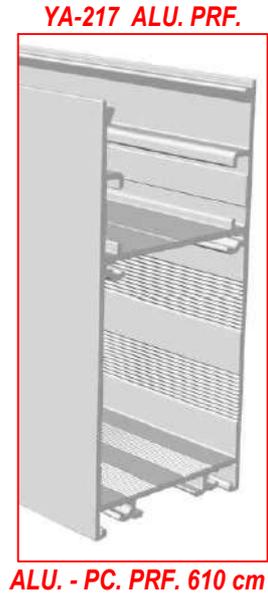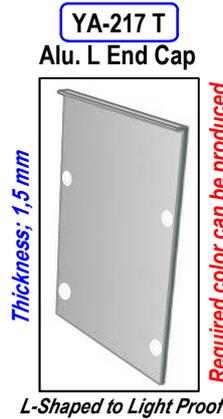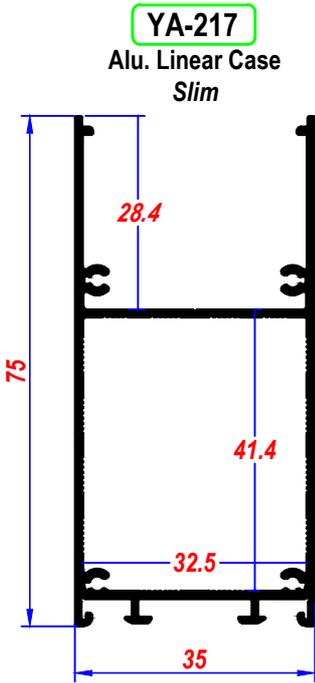


Connection Clips; 2 cm with 1 Hole

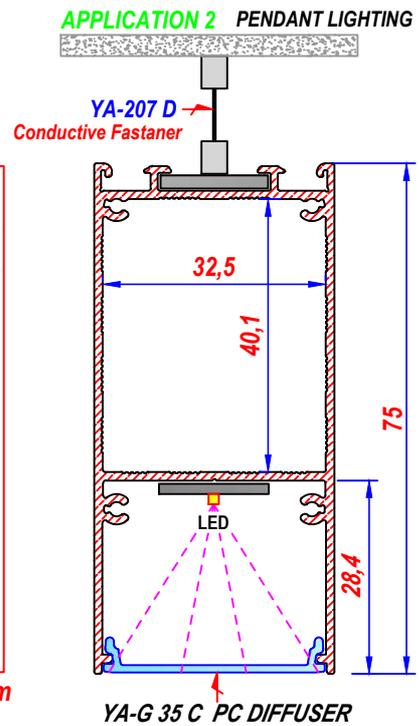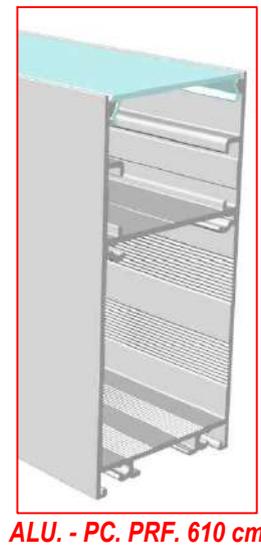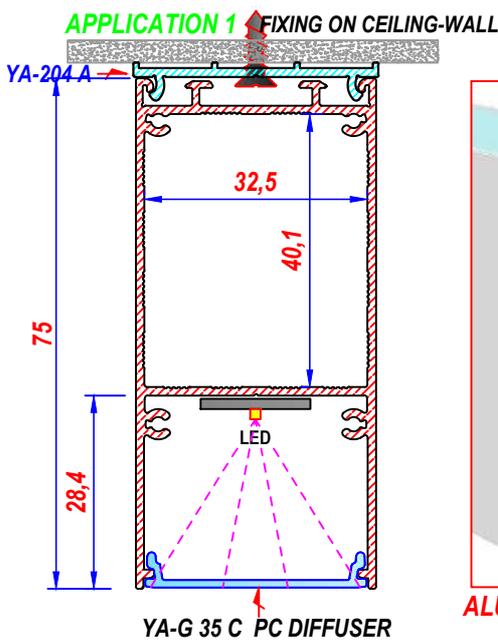


All cutting dimensions and surface coatings can be done according to requirements

**ECONOMIC LINEAR LIGHTING**

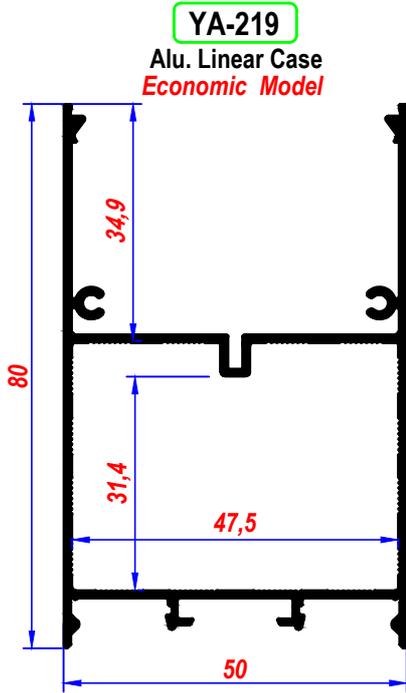

**CEILING PENDANT INSTALLATION**

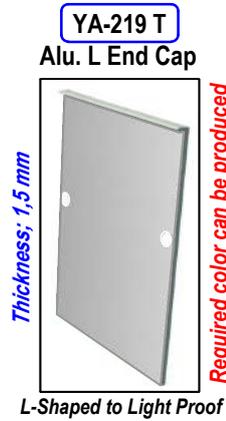

**YA-G 50 A**  
PC.Diffuser




Sandy Opal

PC diffusers, securely attached from the top, can be easily installed and removed.

**YA-205 D**

Alu. Prf. (Wall Mounting)

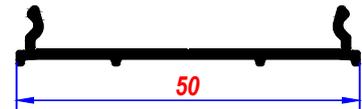

The product can also be used as connection clips in 5 cm short segments.

**YA-207 D**

Conductive Fasteners



**YA-207 D1**

Conductive Fasteners



Suspension wire special length is available

**YA-207 E1**

ZM Connector



**YA-207 E3**

ZM Connector




**USAGE AREAS**

Indoor, suspended with hanging accessories,  
Directly fixing to the ceiling and wall with screws,


Without using YA-205 D, YA-219 can be fixed to the ceiling with screws

As preference, YA-205 D is fixed to the ceiling with screws, then YA-219 attached.


**APPLICATION 2 PENDANT LIGHTING**

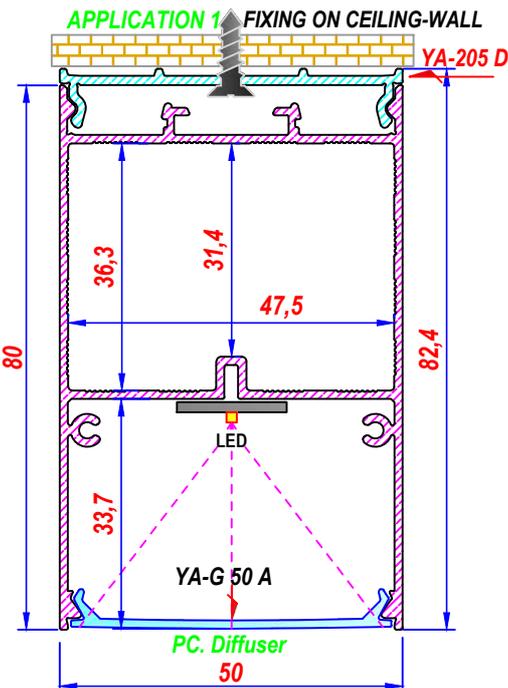

**MOUNTING**


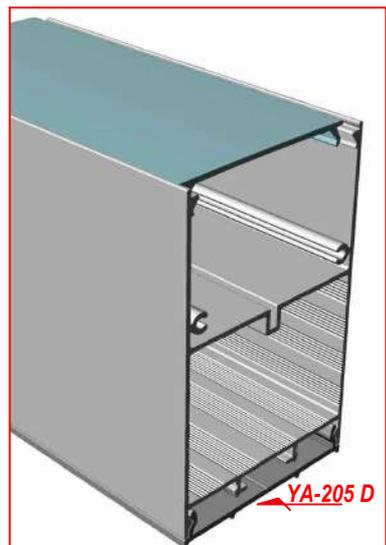


PC.DIFFUSER - ALU. PRF 610 cm

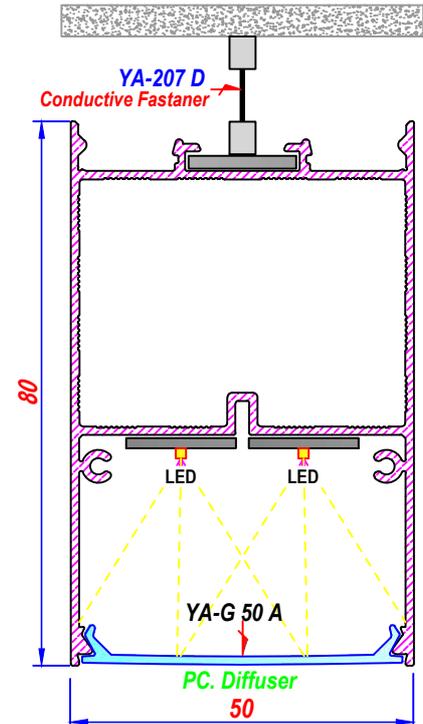


All cutting dimensions and surface coatings can be done according to requirements

**ECONOMIC LINEAR LIGHTING**

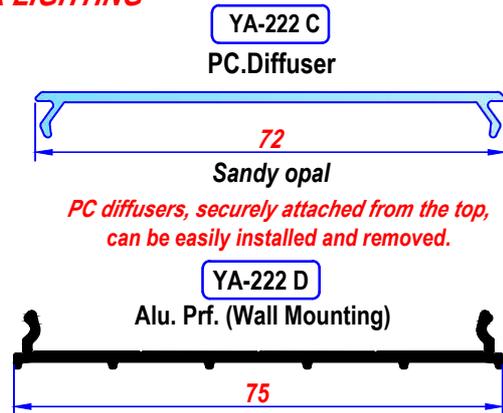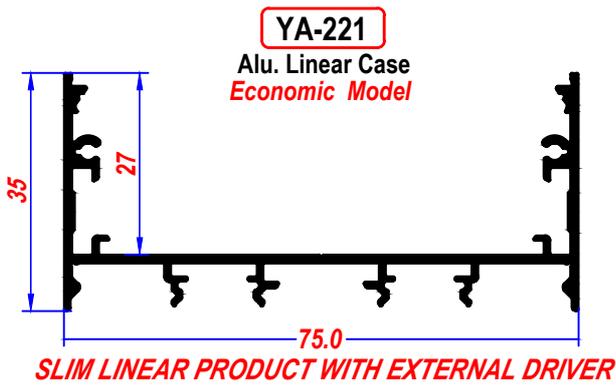


**APPLICATION 1**

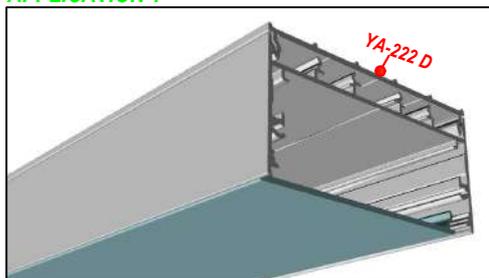


**CEILING MOUNTING; SINGLE-DIRECTION, DOWNWARD LIGHTING**

**APPLICATION 2**

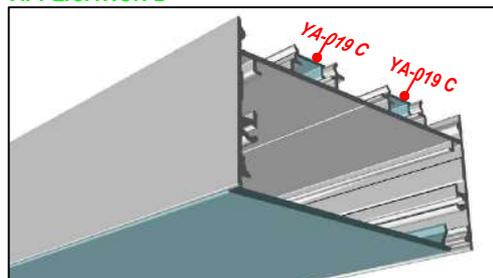

**PENDANT INSTALLATION; UP & DOWN LIGHTING**

**DOUBLE-SIDED LIGHTING**

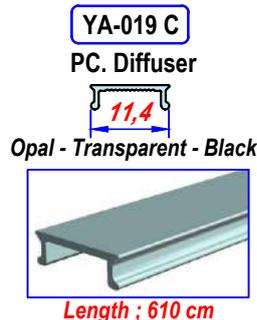

**METAL INTERNAL CORNER CONNECTORS**



Width ; 12 mm

<b>YA-218 K1</b>	30° Metal Corner
<b>YA-218 K2</b>	45° Metal Corner
<b>YA-218 K3</b>	60° Metal Corner
<b>YA-218 K4</b>	90° Metal Corner
<b>YA-218 K5</b>	120° Metal Corner
<b>YA-218 K6</b>	135° Metal Corner
<b>YA-218 K7</b>	150° Metal Corner



Suspension wire special length is available


- APPLICATION METHOD**
- 1) Indoor, pendant installation with suspension accessories, or direct screw fixing to ceiling and wall.
  - 2) Optionally; YA-222 D is screw-fixed to the ceiling, then the main housing is installed with a snap-fit connection.

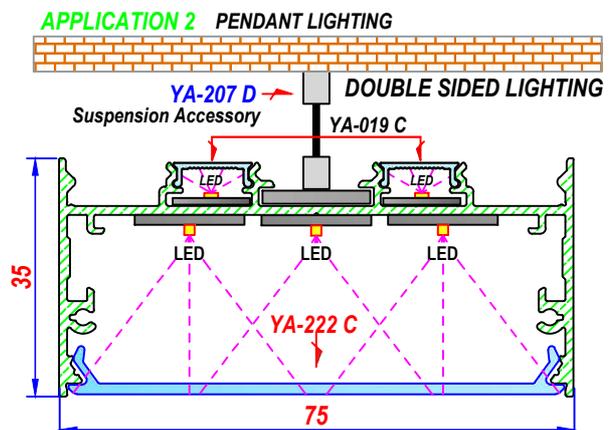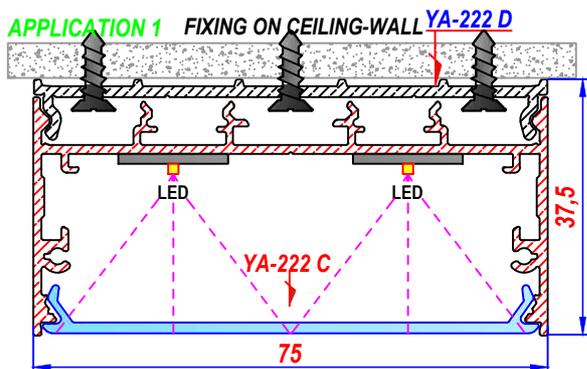


All cutting dimensions and surface coatings can be done according to requirements

**ECONOMIC LINEAR LIGHTING**

**YA-226**  
Alu. Linear Case  
*Economic Model*

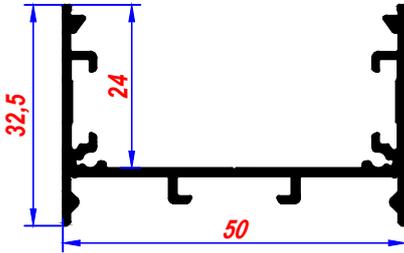

**YA-226 Alu.Prf. 610 cm**

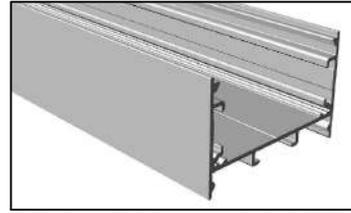

**PENDANT OR WALL-MOUNTED**

**YA-G 50 A**  
PC.Diffuser




**Sandy Opal**

*PC diffusers, securely attached from the top, can be easily installed and removed.*


**YA-205 D**

Alu. Prf. (Wall Mounting)

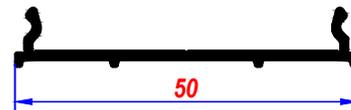

*The product can also be used as connection clips in 5 cm short segments.*

**YA-226 Alu.Prf. YA-G 50 A PC.Prf.**

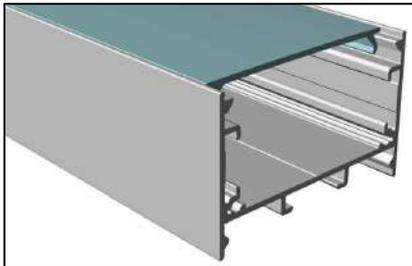

**ALU. PRF.- PC. PRF. 610 cm**

**YA-207 D**

Conductive Fasteners



SINGLE - CHROME

**YA-207 D1**



DOUBLE - CHROME

*Suspension wire special length is available*

**YA-207 E1**

ZM Connector



*Thickness; 2,5 mm*

**YA-207 E3**


ZM Connector



*Length;110 mm Width; 16,3 mm*

**YA-226 T**

Alu. L End Cap



*Thickness; 1,5 mm*

*L-Shaped to Light Proof*


**METAL INTERNAL CORNER CONNECTORS**




*Width ; 12 mm*

- YA-218 K1** 30° Metal Corner
- YA-218 K2** 45° Metal Corner
- YA-218 K3** 60° Metal Corner
- YA-218 K4** 90° Metal Corner
- YA-218 K5** 120° Metal Corner
- YA-218 K6** 135° Metal Corner
- YA-218 K7** 150° Metal Corner

**APPLICATION 1 FIXING ON CEILING-WALL**

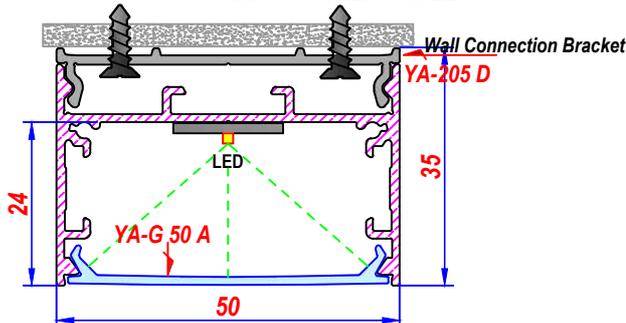


**APPLICATION 2 PENDANT LIGHTING**

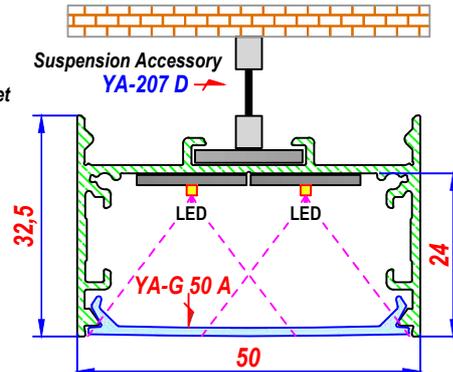


*All cutting dimensions and surface coatings can be done according to requirements*



NEW, REFLECTOR – LINEAR PROFILES

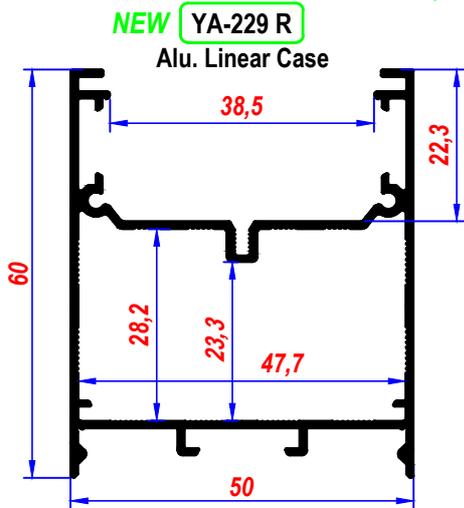


NEW PRODUCT COMPATIBLE WITH LENS AND REFLECTOR

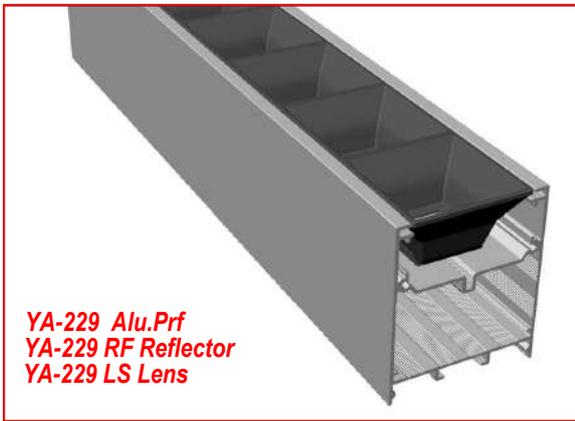

ALU. PROFILE; 610 cm - REFLECTOR; 279.4 mm  
279,4 mm

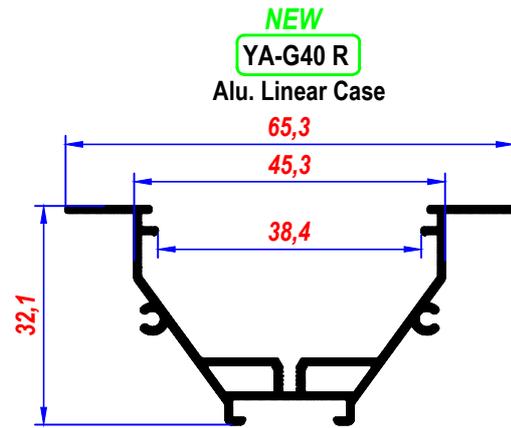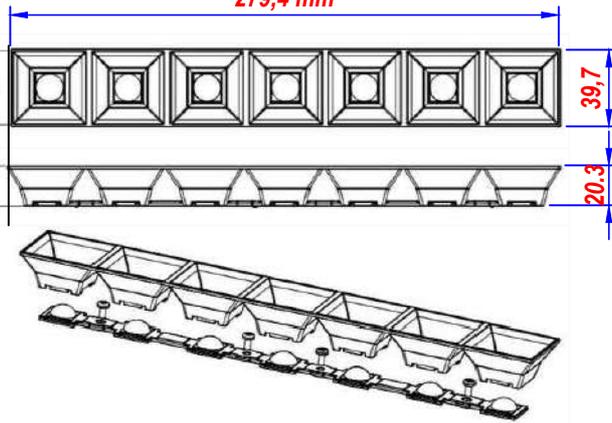


NEW PRODUCT COMPATIBLE WITH LENS AND REFLECTOR

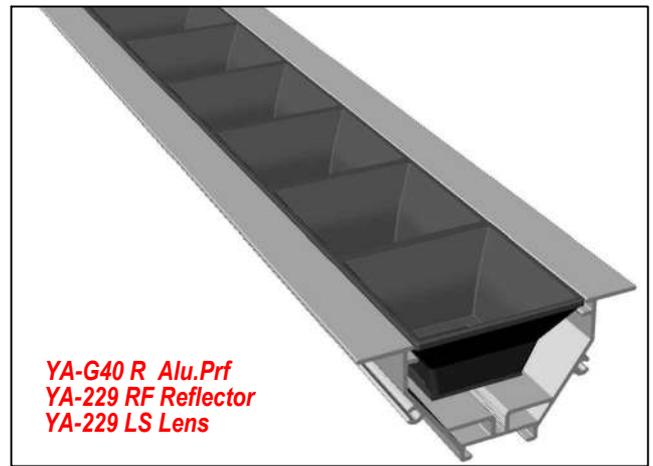

ALU. PROFILE; 610 cm - REFLECTOR; 279.4 mm

**YA-229 RF**  
Reflector (Black-White)


**YA-229 LS**  
Beam Angle 50-80°

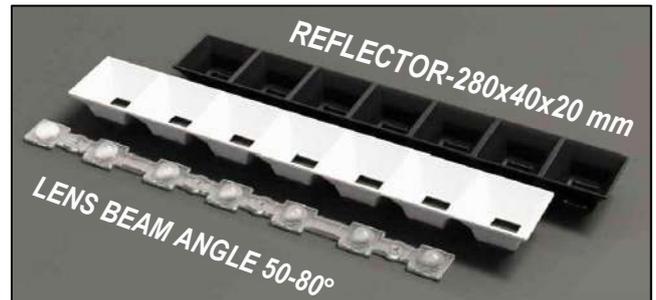

**YA-229 T**  
Alu. End cap




1,5 mm Alu.

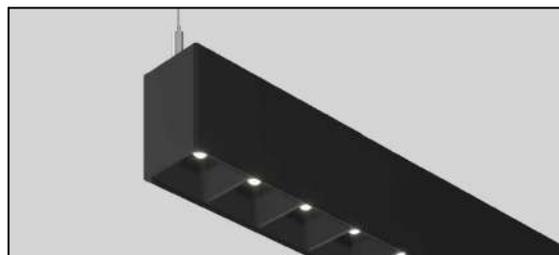

PENDANT LINEAR APPLICATION WITH REFLECTOR

**YA-G40 T**  
Alu. End cap

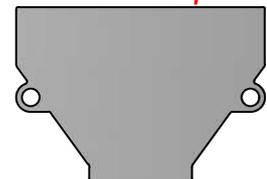


1,5 mm Alu.

NEW, REFLECTOR – LINEAR PROFILES

NEW YA-230 R


Alu. Linear Case

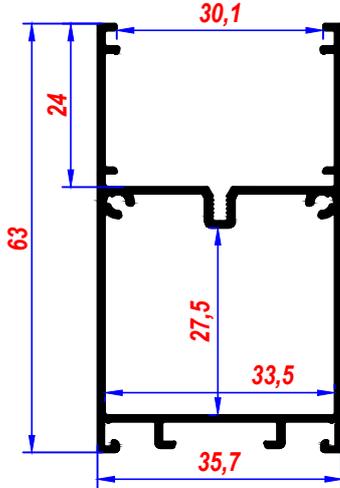

NEW


YA-G30 R

Alu. Linear Case

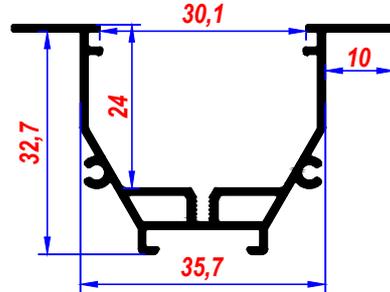


NEW PRODUCT COMPATIBLE WITH LENS AND REFLECTOR

NEW PRODUCT COMPATIBLE WITH LENS AND REFLECTOR

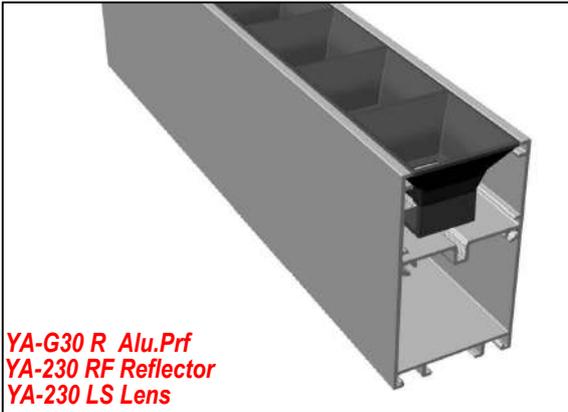


YA-G30 R Alu.Prf  
YA-230 RF Reflector  
YA-230 LS Lens

ALU. PROFILE; 610 cm - REFLECTOR; 132.3 mm

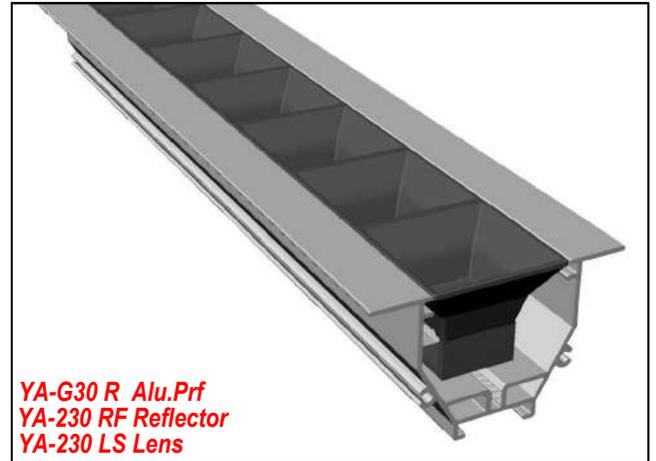

YA-G30 R Alu.Prf  
YA-230 RF Reflector  
YA-230 LS Lens

ALU. PROFILE; 610 cm - REFLECTOR; 132.3 mm

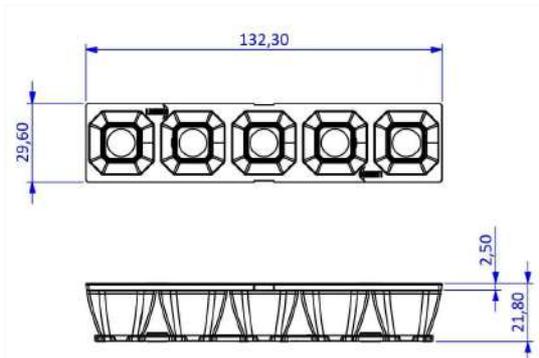


YA-230 RF

Reflector (Black-White)

YA-230 LS

Lens

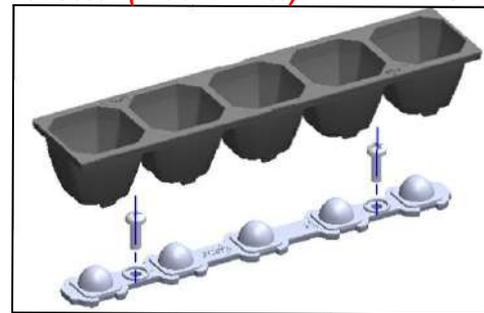


YA-230 T

Alu. End cap




1,5 mm Alu.

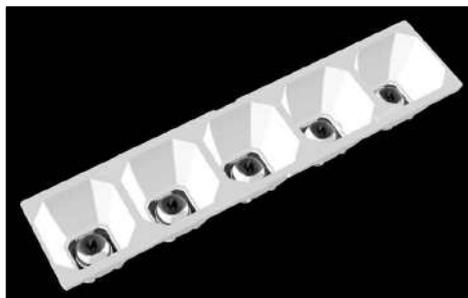








YA-G30 T

Alu. End cap



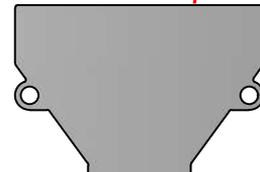


1,5 mm Alu.

NEW, ECONOMICAL MINI LINEAR LED LIGHTING PROFILES

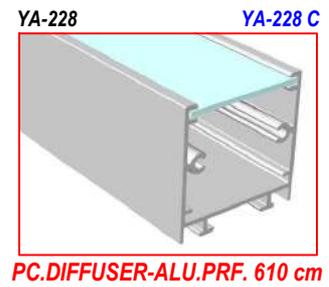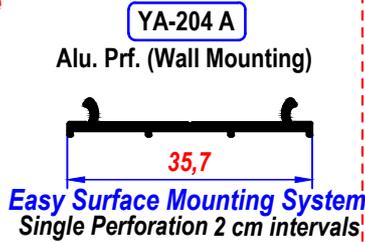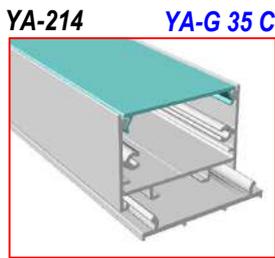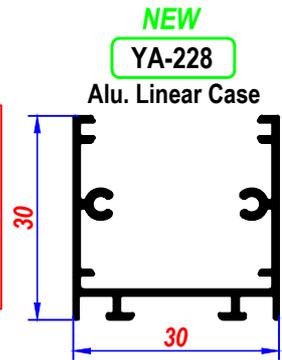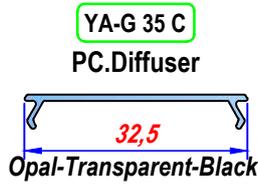
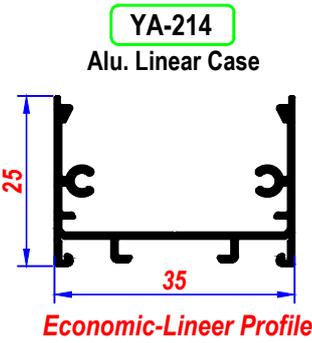


YA-214 L & YA-228 L Alu. end caps are new products. No light leakage occurs btw the diffuser and the end cap. Compared to flat end caps, they offer a more decorative appearance and can be painted in any desired color.

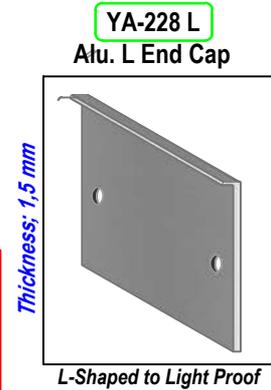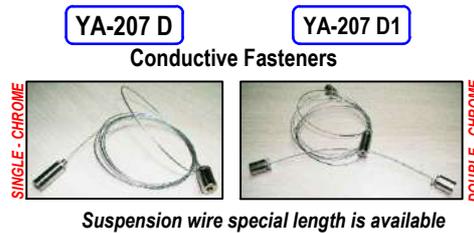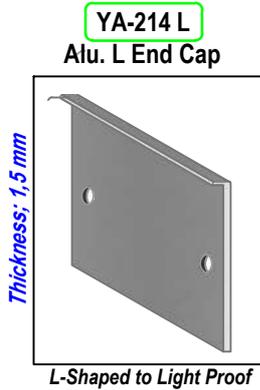

APPLICATION METHOD


Indoor, pendant installation with suspension accessories, or screw-fixed to ceiling or wall.

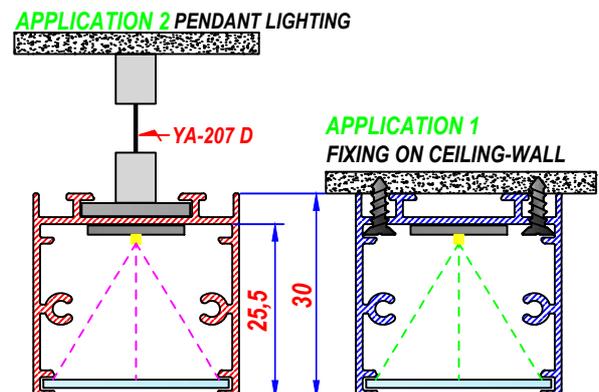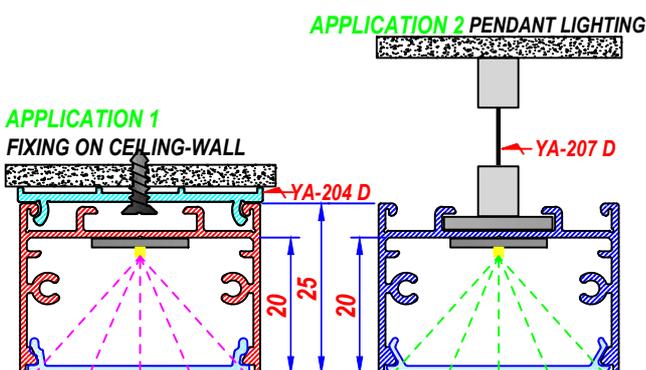

All cutting dimensions and surface coatings can be done according to requirements


**YA-213**

Alu. Linear Case

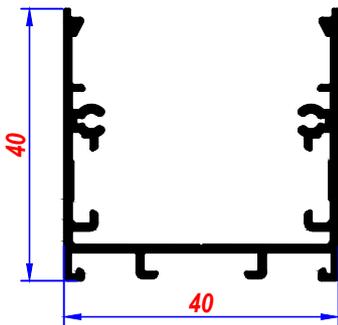

**TWO DIFFERENT PC DIFFUSER OPTIONS**

YA-213 ALU. YA-213 C PC. YA-213 ALU. YA-213 U PC.

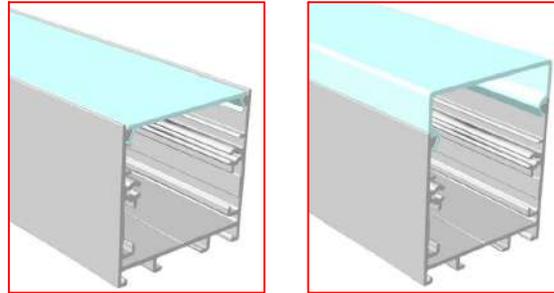

PC.DIFFUSER-ALU.PRF. 610 cm

**YA-213 C**


PC. Diffuser



PC Diffuser; 610 cm

**YA-213 U**

PC. Diffuser

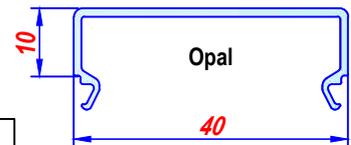

**YA-213 A**


Alu. Prf. (Wall Mounting)



Easy Surface Mounting System  
Single Perforation 2 cm intervals

**YA-213 L**

Alu. L End Cap

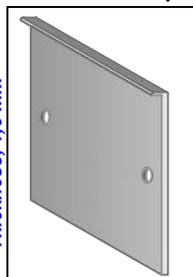


Thickness: 1,5 mm

Suitable for YA-213 C

**YA-213 L 1**

Alu. L End Cap

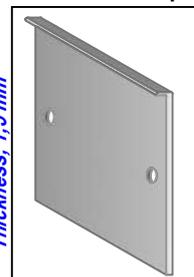


Thickness: 1,5 mm

Suitable for YA-213 U

**YA-1209 C**

Alu. Slide Prf.



**YA-207 D**

Conductive Fasteners



SINGLE - CHROME

**YA-207 D1**



DOUBLE - CHROME

Suspension wire special length is available

**YA-207 E1**

ZM Connector



Angle: 90

Thickness: 2,5 mm

Width: 12 mm



**METAL INTERNAL CORNER CONNECTORS**



Width ; 12 mm

- YA-218 K1 30° Metal Corner
- YA-218 K2 45° Metal Corner
- YA-218 K3 60° Metal Corner
- YA-218 K4 90° Metal Corner
- YA-218 K5 120° Metal Corner
- YA-218 K6 135° Metal Corner
- YA-218 K7 150° Metal Corner


CAN BE USED AS A CEILING PENDANT WITH BOTH DIFFUSER OPTIONS.

OPTIONALLY; YA-213 A IS SCREW-FIXED TO THE CEILING OR WALL, THEN THE MAIN HOUSING (YA-213 E) IS INSTALLED WITH A SNAP-FIT CONNECTION.

FRAMES CAN BE MANUFACTURED IN CUSTOM SIZES AND SHAPES.


APPLICATION 2 PENDANT LIGHTING APPLICATION 1 FIXING ON CEILING-WALL

YA-213 YA-213 A YA-213 C

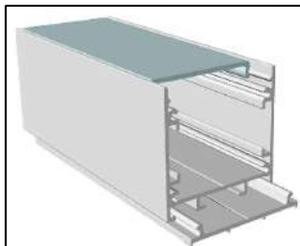

PC.DIFFUSER-ALU.PRF. 610 cm


FRAMES CAN BE MANUFACTURED IN CUSTOM SIZES. CUT AT 45° ANGLES, FRAMES CAN BE PRODUCED IN DECORATIVE SHAPES SUCH AS SQUARES, TRIANGLES ETC

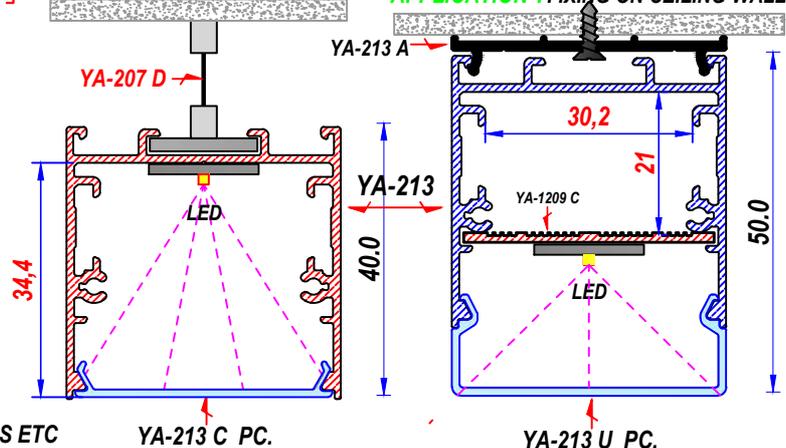

All cutting dimensions and surface coatings can be done according to requirements


**YA-1209**

Alu. Linear Case

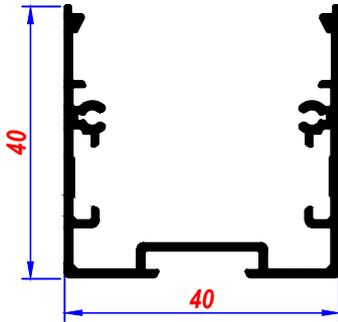


Two Different PC Diffuser Options

YA-1209 ALU. YA-213 C PC.

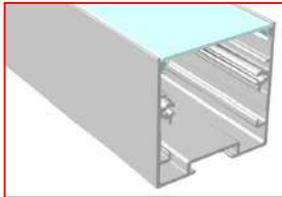


PC.DIFFUSER-ALU.PRF. 610 cm

YA-1209 ALU. YA-213 U PC.

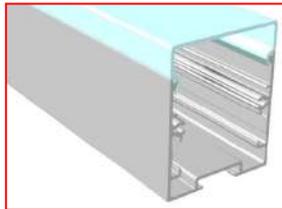


**YA-213 C**

PC. Diffuser

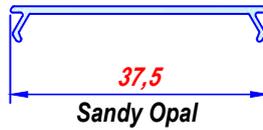

**YA-213 U**

U - PC. Diffuser

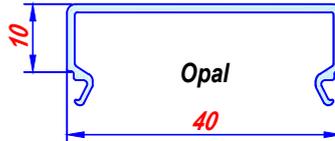


**YA-1209 C**


Alu. Slide Profile



YA-1209 ALU. PRF. 610 cm

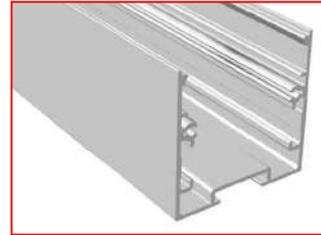


**YA-1209 L**  
Alu. L End Cap

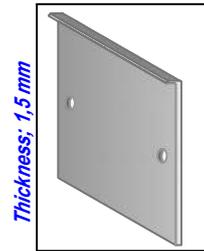


Suitable for YA-213 C

**YA-1209 L1**  
Alu. L End Cap

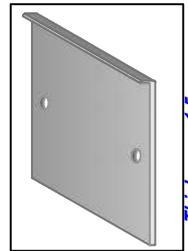


Suitable for YA-213 U

PENDANT MOUNTING

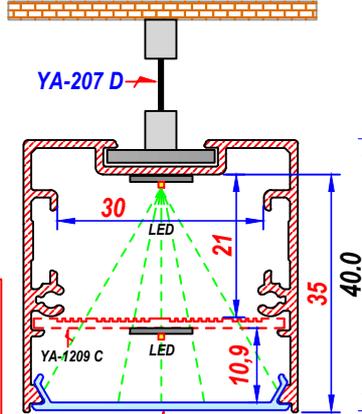

YA-213 C PC.

CEILING - WALL MOUNTING

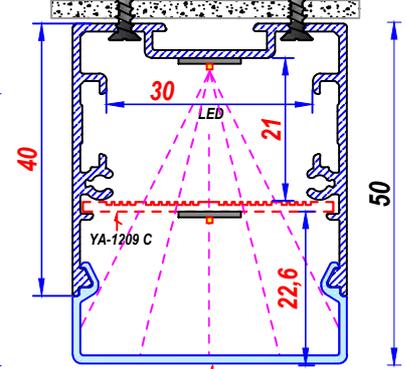

YA-213 U PC.

**YA-207 E1**

Horizontal Metal Corner



Width: 16,3 mm

**YA-207 E3**

Straight Joint

**YA-207 E4**

Cross Corner

**YA-207 E5**

120° Angled Corner

**YA-207 E6**

135° Angled Corner

**YA-207 E7**

150° Angled Corner

VERTICAL METAL INTERNAL CORNER CONNECTORS



Width: 12 mm

**YA-218 K1**

30° Metal Corner

**YA-218 K2**

45° Metal Corner

**YA-218 K3**

60° Metal Corner

**YA-218 K4**

90° Metal Corner

**YA-218 K5**

120° Metal Corner

**YA-218 K6**

135° Metal Corner

**YA-218 K7**

150° Metal Corner

HORIZONTAL INTERNAL CORNER (16 MM) ACCESSORIES ARE ALSO AVAILABLE


**YA-207 D**

Conductive Fasteners



Suspension wire length 1,5 - 3 - 4,5 - 6 mt

ANGLE CUTTING FRAME APPLICATION



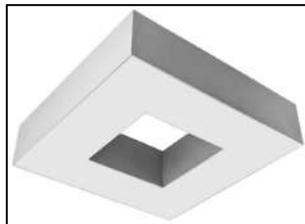


INDOOR PENDANT LIGHTING, FIXING TO CEILING-WALL WITH SCREW ON SURFACE



DIFFERENT FRAMES CAN BE PRODUCED IN DIFFERENT SHAPES BY MAKING ANGLED CUTS



All cutting dimensions and surface coatings can be done according to requirements

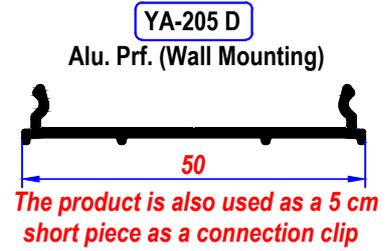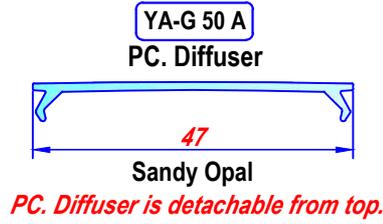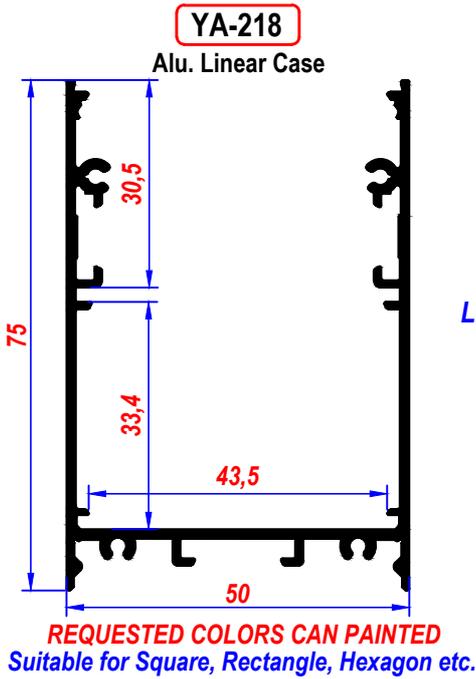

**YA-218 T Alu.L - End Cap is new product.**  
Light scattering is prevented by new end cap.  
More decorative than straight End cap.



**ALU.-PC.PRF. 610 cm**

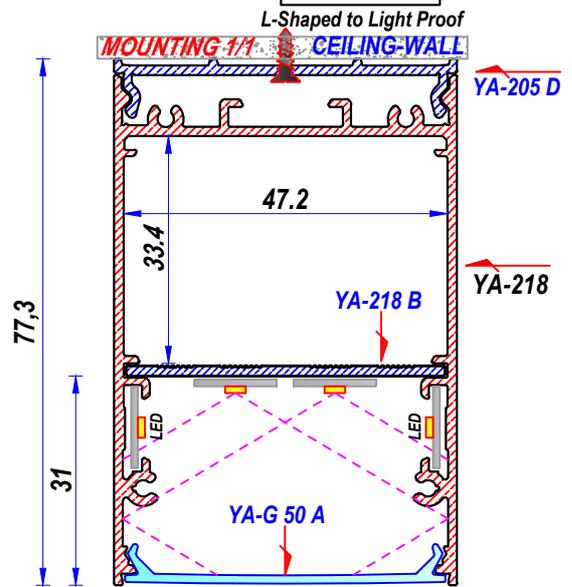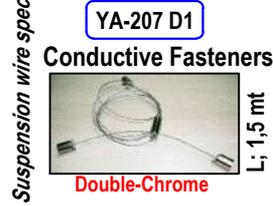

**INDOOR, PENDANT INSTALLATION WITH SUSPENSION ACCESSORIES, OR SCREW-FIXED TO CEILING / WALL.**


**CAN BE INSTALLED WITHOUT YA-218 D BY DIRECTLY SCREWING YA-218 I TO THE CEILING OR WALL.**

**OPTIONALLY; YA-218 D IS SCREW-FIXED TO THE CEILING, THEN THE MAIN HOUSING IS INSTALLED WITH A SNAP-FIT CONNECTION.**





- YA-218 K1** Angle: 30 Connector
- YA-218 K2** Angle: 45 Connector
- YA-218 K3** Angle: 60 Connector
- YA-218 K4** Angle: 90 Connector

- YA-218 K5** Angle: 120 Connector
- YA-218 K6** Angle: 135 Connector
- YA-218 K7** Angle: 150 Connector

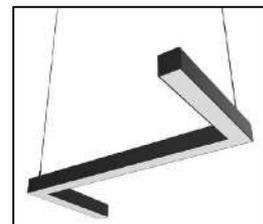

**All accessories are available for multi angle systems.**  
All cutting dimensions and geometric shapes can be done according to requirements


**LINEAR PROFILE WITH SLIDING DIFFUSER AND ACCESSORIES**

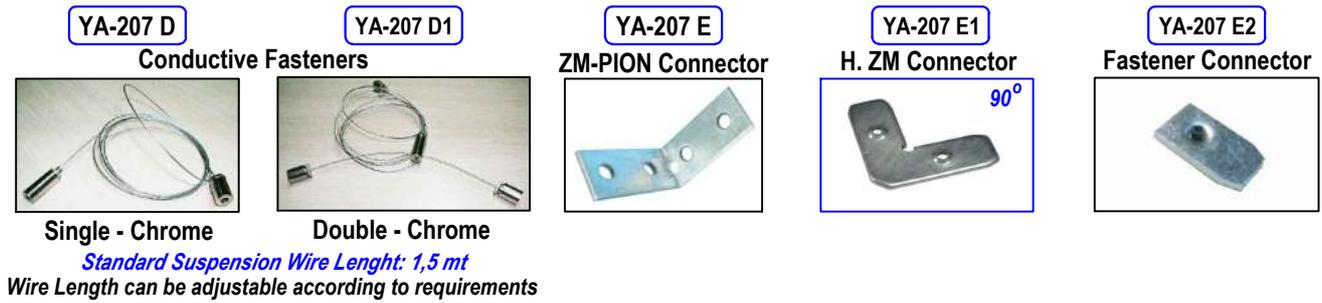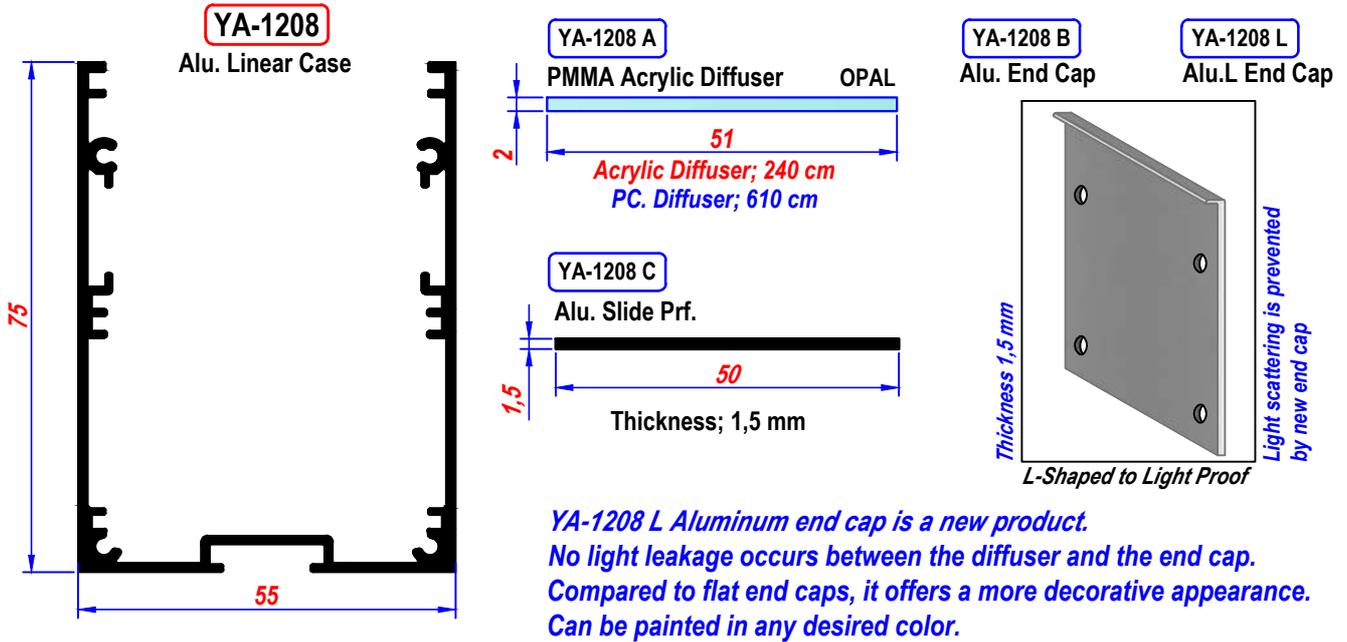

**METHODS OF APPLICATION**


INDOOR PENDANT LIGHTING or FIXING TO CEILING-WALL WITH SCREW ON SURFACE

**YA-1208 ALU. & ACCESSORIES**

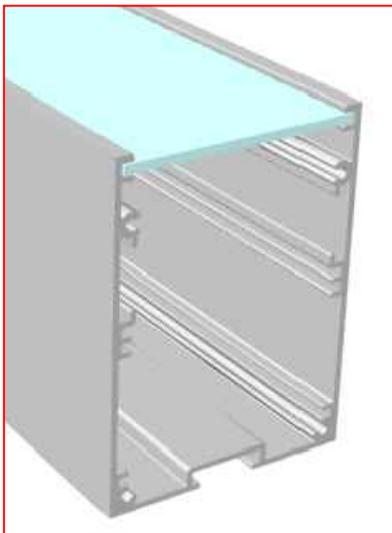


Alu.Prf. 610 cm-Acrylic Diffuser; 240 cm

**CEILING PENDANT INSTALLATION**

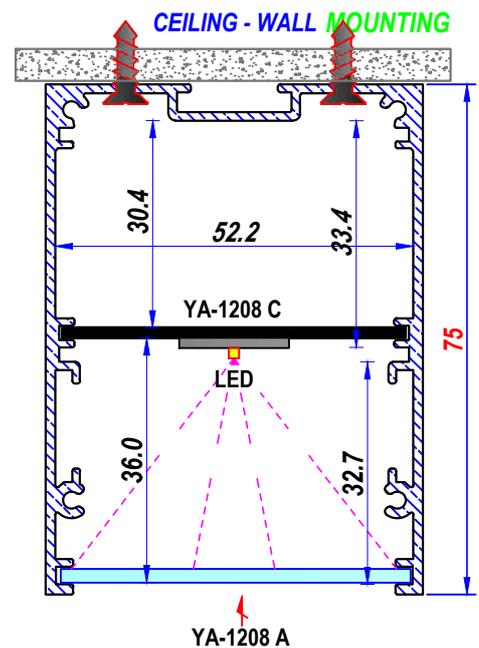


All cutting dimensions and surface coatings can be done according to requirements

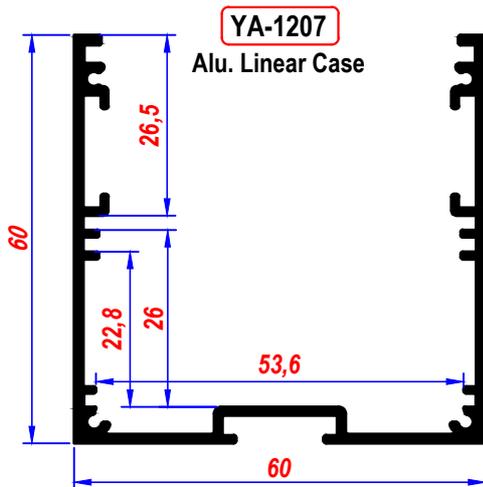


**YA-1207**  
Alu. Linear Case

ALL CUTTING DIMENSIONS AND COLORS CAN BE DONE ACCORDING TO REQUIREMENTS

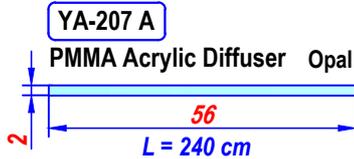

**YA-207 A**

PMMA Acrylic Diffuser Opal

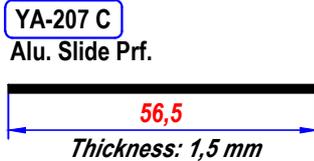

**YA-207 C**

Alu. Slide Prf.




**YA-1207 T**  
Alu. End Cap

Thickness: 1,5 mm

L-Shaped to Light Proof

Required color can be produced

**YA-1207 ALU. & ACCESSORIES**

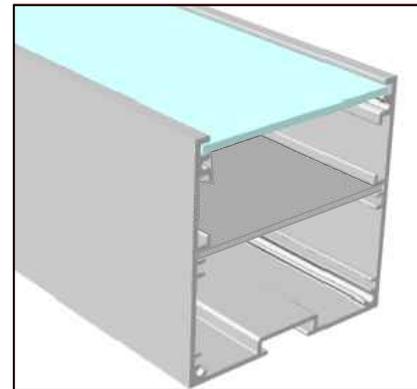

Alu.Prf. 610 cm-Acrylic Diffuser 240 cm

**METHOD OF APPLICATION**


Frames can be produced with YA-1207, in different shapes by making angled cuts.

Fastener with increased load capacity, used for hanging fixtures on a steel cable.

Mounted in the guide (large lock) of the profile. The power cable can be inserted through the hole drilled in the extrusion, further through the channel in the fastener

ZM-PION Connector of 90, 120, 135, 150 angles are also available in stocks

**MOUNTING 1/1**

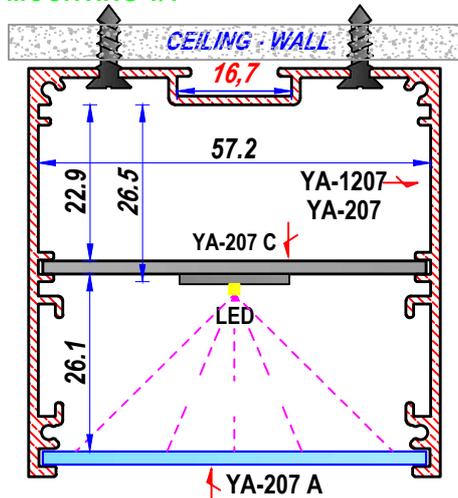

**YA-1207**



ANGLE CUTTING FRAME APPLICATION

**YA-207 D**  
Conductive Fasteners

**YA-207 D1**  
Conductive Fasteners

Suspension wire special length are available

SINGLE-CHROME

DOUBLE-CHROME

**YA-207 TA**  
Head Conductive



**YA-207 E**  
ZM - PION Connector



**YA-207 E4**  
ZM Connector



**YA-207 E1**  
ZM Connector



**YA-207 E5**  
ZM Connector



**YA-207 E2**  
Fastener Connector



**YA-207 E6**  
ZM Connector



**YA-207 E3**  
ZM Connector




**YA-207 E7**  
ZM Connector



All cutting dimensions and surface coatings can be done according to requirements

**YA-207 BY**  
Alu. Linear Case  
**NEW VERSION**

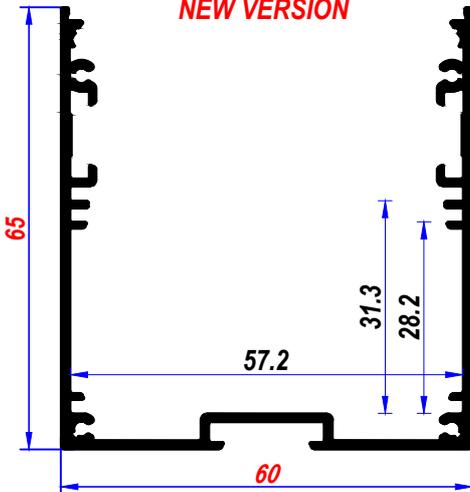


PC. Diffuser, snap-on and removable from the top. suitable for frame production in shapes such as square, rectangle, and hexagon.

**YA-220 C**  
PC.Diffuser



PC.Diffuser is detachable from top.

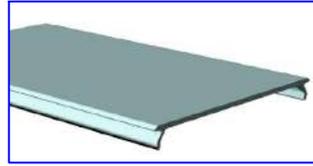


PC.DIFFUSER 610 cm

**YA-207 C**  
Alu.Slide Prf.




**YA-207 BY-1**  
Alu. Linear Case  
**OLD VERSION**  
SLIDING DIFFUSER

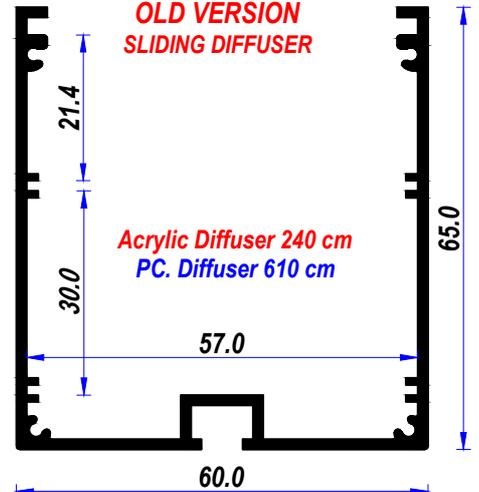

Acrylic Diffuser 240 cm  
PC. Diffuser 610 cm  
**Sliding Acrylic Diffuser; 240 cm**  
Not suitable for frame production.


**YA-207 BY**      **YA-220 C**

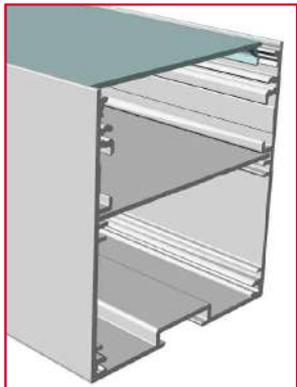

Alu.Prf. PC.Diffuser 610 cm

**YA-207 BY T**  
Alu. L End Cap

Thickness: 1,5 mm

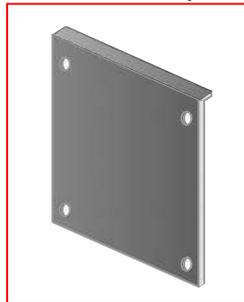

L-Shaped to Light Proof  
Required color can be produced

Wire Length can be adjustable according to requirements

**YA-207 D**  
Suspension wire




SINGLE - CHROME  
Standard Wire Length: 1,5 mt

**YA-207 D1**  
Suspension wire



DOUBLE - CHROME

**YA-207 BY-1**      **YA-207 A**

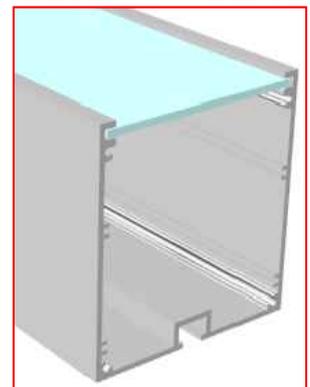

Alu.Prf. 610 cm  
Acrylic Diffuser 240 cm


**METAL INTERNAL CORNER CONNECTORS**



- YA-218 K1** Angle: 30 Connector
- YA-218 K2** Angle: 45 Connector
- YA-218 K3** Angle: 60 Connector
- YA-218 K4** Angle: 90 Connector
- YA-218 K5** Angle: 120 Connector
- YA-218 K6** Angle: 135 Connector
- YA-218 K7** Angle: 150 Connector

YA-218 T Aluminum edge end cap is a new product. No light leakage occurs btw the diffuser and the end cap. Compared to flat end caps, it offers a more decorative appearance. Can be painted in any desired color.


**LINEAR APPLICATION**

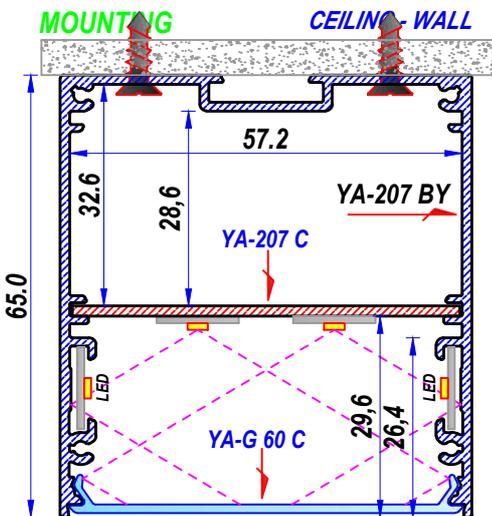

Frames can be produced in different shapes by making angled cuts.  
All cutting dimensions and surface coatings can be done according to requirements


**YA-220**

Alu. Linear Case  
**DOUBLE - SIDED LIGHTING**

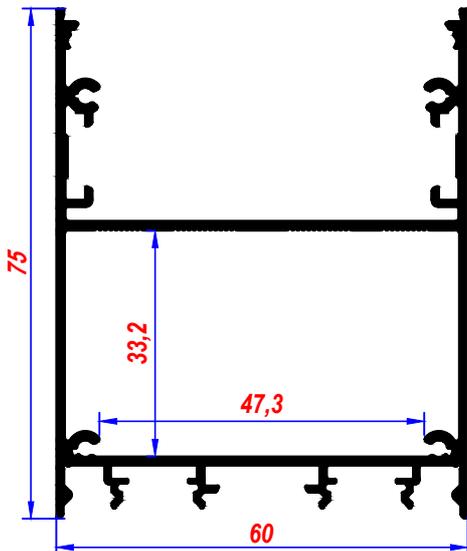

**REQUESTED COLORS CAN PAINTED**  
Suitable for Square, Rectangle, Hexagon etc.

**YA-220 SET MOUNTING**

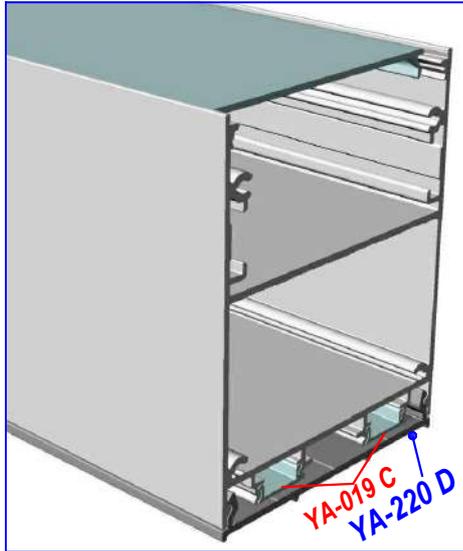

ALU.-PC.PRF. 610 cm **FIXED SLIDE**

**SQUARE APPLICATION**




**YA-220 C**

PC. Diffuser



Sandy Opal

*PC. Diffuser is detachable from top.*

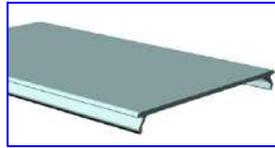

PC.PRF. 610 cm

*Provides up and down lighting  
in pendant lighting applications*


*Light scattering is prevented by new end cap.  
More decorative than straight End cap.*

**YA-019 C**

PC. Diffuser



Opal-Transparent  
Black Color PC, coming soon



**YA-207 D**

Conductive Fasteners



Single-Chrome

L: 1,5 mt

**YA-207 D1**

Conductive Fasteners




Double-Chrome

Special wire length is available

**YA-220 D**

Alu. Prf. (Wall Mounting)

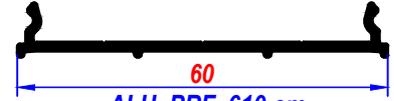

ALU. PRF. 610 cm

**YA-220 T**

Alu. L End Cap




Thickness: 1,5 mm

L-Shaped to Light Proof

Required color can be produced

**MOUNTING 1/1** CEILING-WALL **YA-220 D**

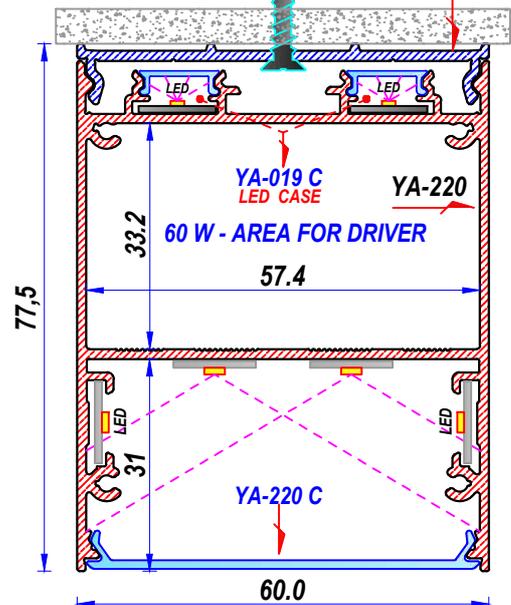


**AVAILABLE FOR INDOOR PENDANT LIGHTING,  
CEILING - WALL MOUNTING APPLICATIONS**

**HEXAGON APPLICATION**




All cutting dimensions and surface coatings can be done according to requirements

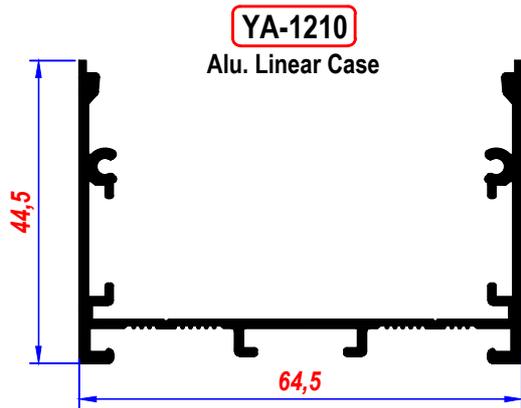





**APPLICATION AREAS;**


- \* Indoor, pendant installation with suspension accessories, or screw-fixed to ceiling / wall.
- \* Can be used without ya-1210 d by fixing directly to ceiling or wall with screws.
- \* Optionally; ya-1210 d is screw-fixed to the ceiling or wall first, then the main housing is installed with a snap-fit connection.

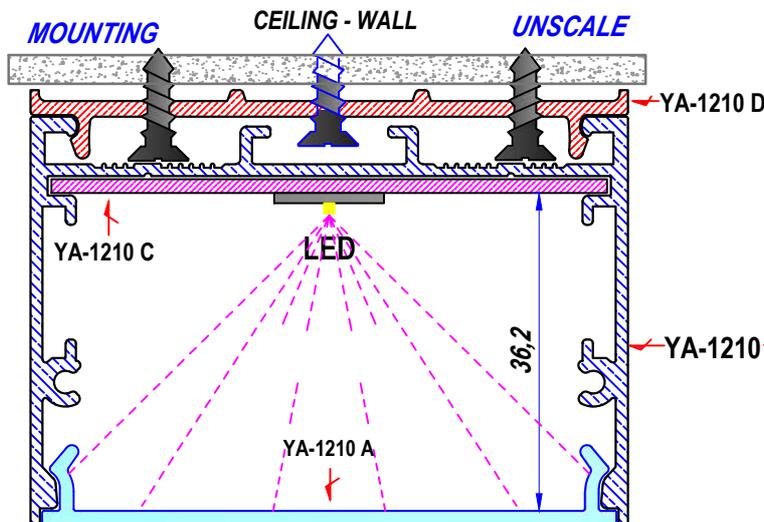

**45 DEGREES ANGLE CUTTED, DECORATIVE TYPES OF SQUARE-RECTANGULAR FRAMES CAN BE PRODUCED.**


*All cutting dimensions and surface coatings can be done according to requirements*

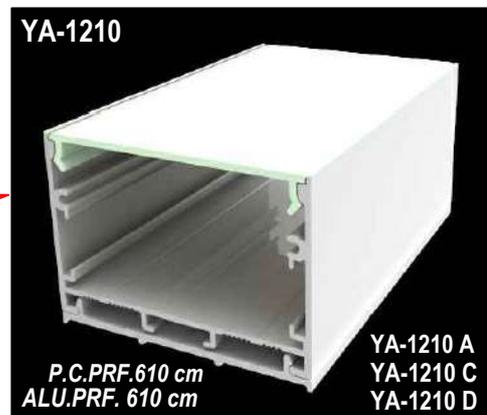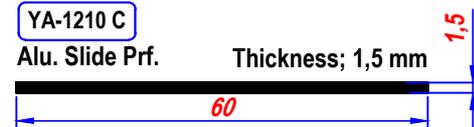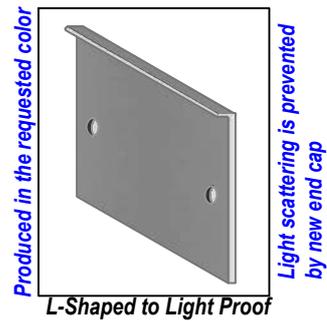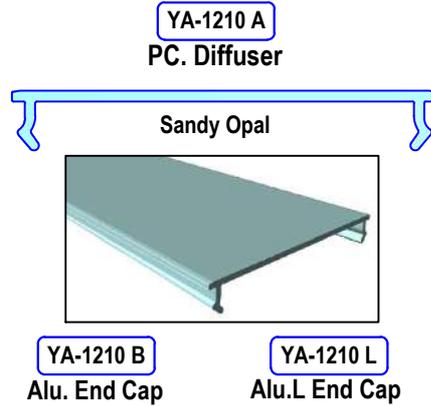


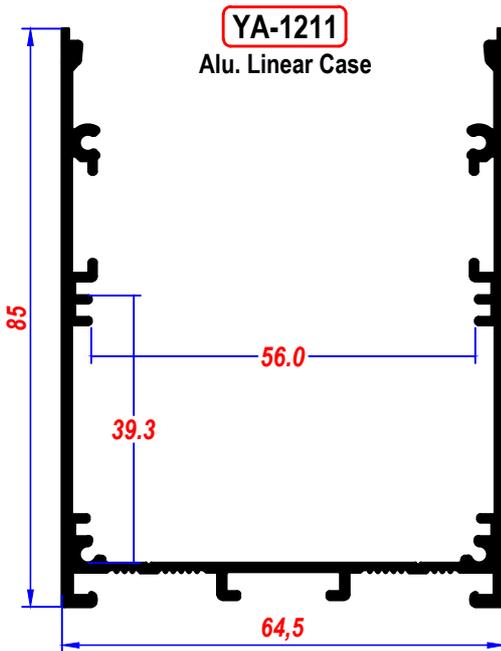


**YA-1211**  
Alu. Linear Case

**YA-1210 A**  
PC. Diffuser

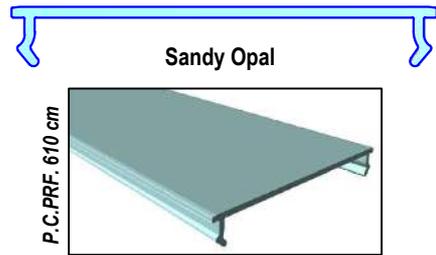

**YA-1210 D**  
Alu. Prf. (Wall Mounting)

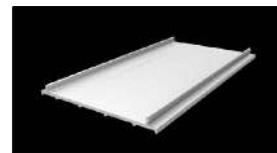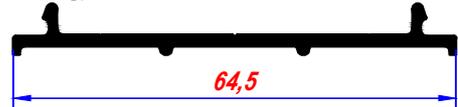


YA-1210 D ALU.PRF. 610 cm

<b>YA-207 D</b> Single Fasteners	
<b>YA-207 D1</b> Double Fasteners	
<b>YA-207 E</b> Vertical 90° ZM Connector	
<b>YA-207 E1</b> H. 90° ZM Connector	

**YA-1211 B**  
Alu. End Cap


**YA-1211 L**  
Alu.L End Cap

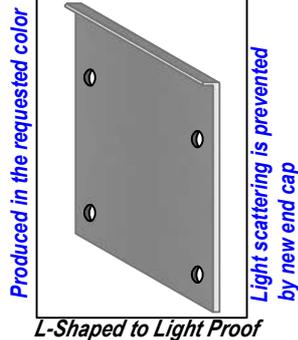

**YA-1210 C**


Alu. Slide Prf.

Thickness; 1,5 mm



**YA-207 E2**

Metal Hooks

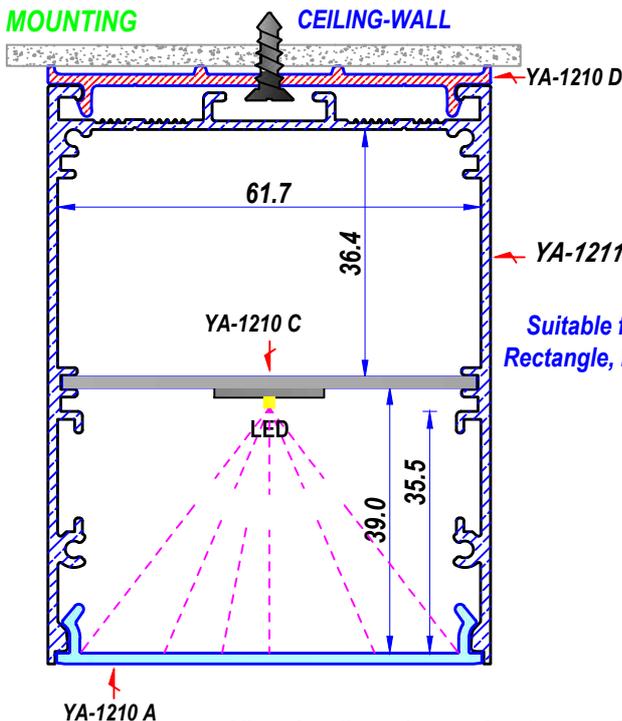

Available for indoor pendant lighting,  
Ceiling - wall mounting applications  
45 Degrees angle cutted, decorative types of  
square-rectangular frames can be produced.




Suitable for Square,  
Rectangle, Hexagon etc.


Without using YA-1210 D, it can be used  
by fixing to ceiling or wall with screws.  
YA-1210 D is fixed to ceiling or wall with screws.

All cutting dimensions and surface coatings can be done according to requirements




SURFACE MOUNTED - PENDANT LIGHTING, DOUBLE - SIDED LIGHTING

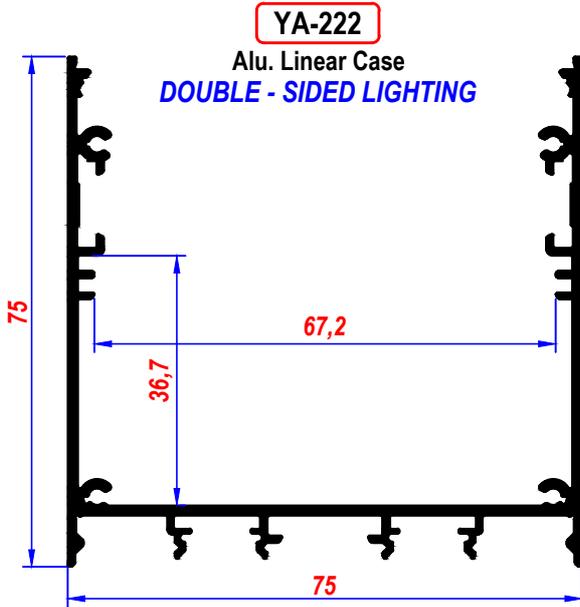



Suitable for Square, Rectangle, Hexagon etc.

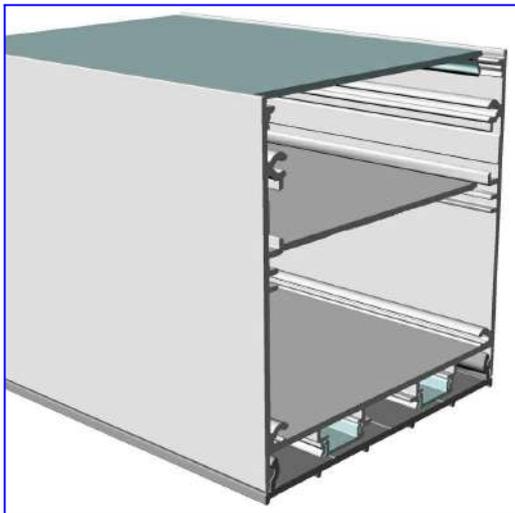


YA-222 SET MOUNTING

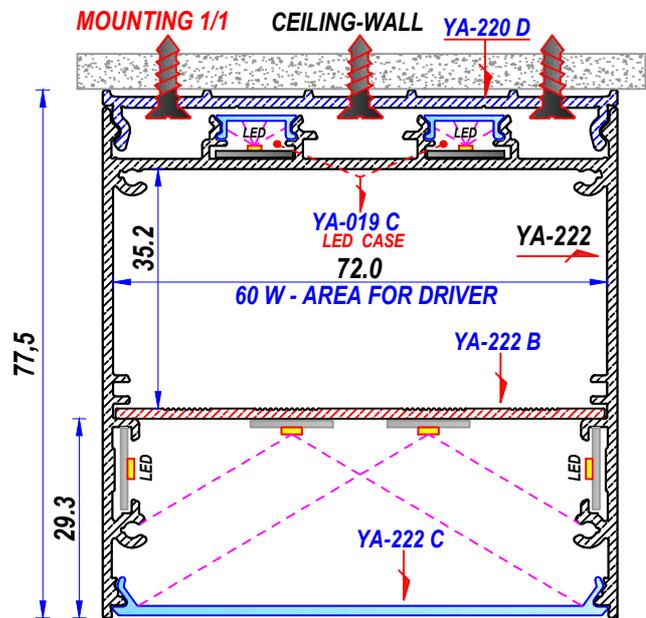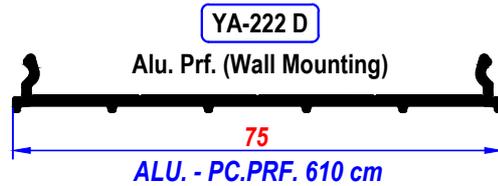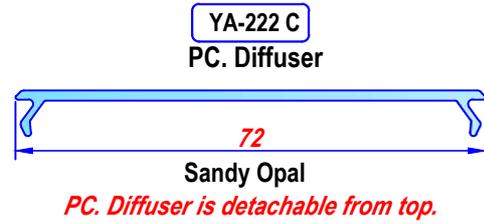


AVAILABLE INDOOR PENDANT LIGHTING, CEILING - WALL MOUNTING APPLICATIONS

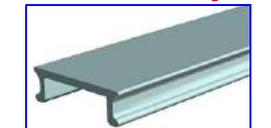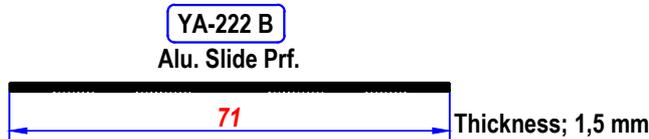


used for Pendant Lighting

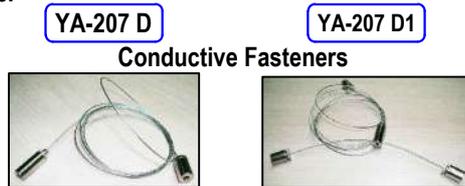

Suspension wire special length is available



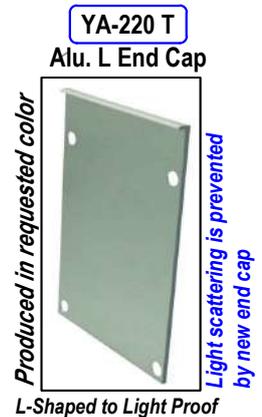


All cutting dimensions and surface coatings can be done according to requirements


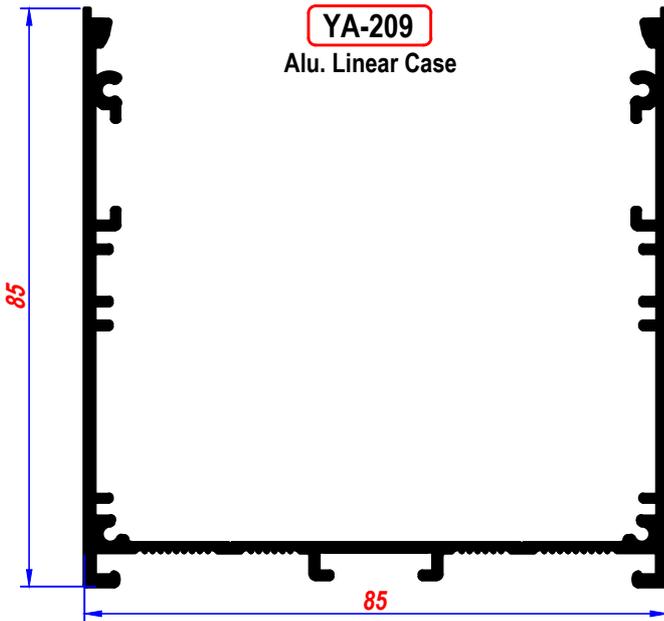


Optionally used with ceiling mounting profile

Suitable for Square - Rectangle Application

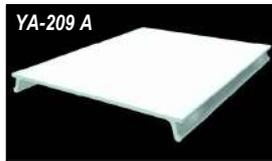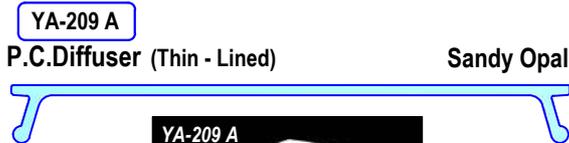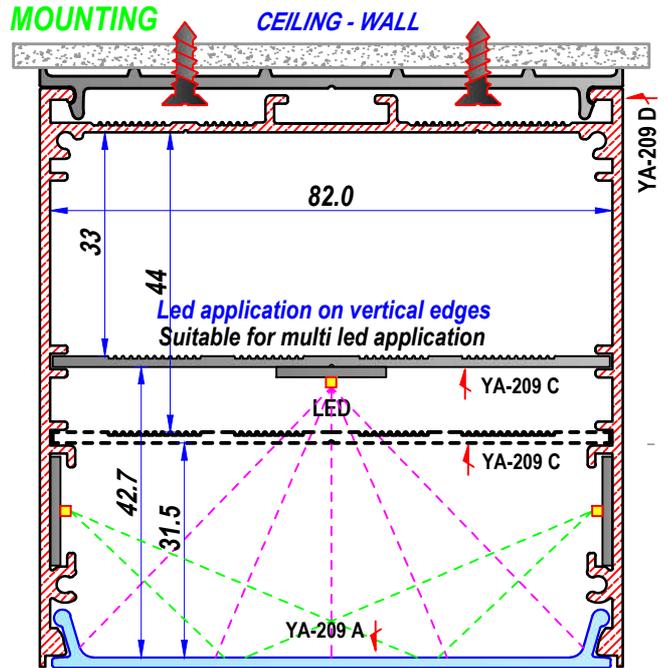




PC.DIFFUSER-ALU.PRF. 610 cm



**INDOOR PENDANT LIGHTING**

L-Shaped to Light Proof


Without using YA-209 D, it can be used by fixing to ceiling or wall with screws.

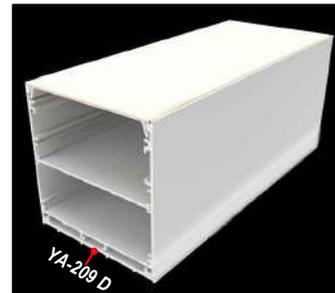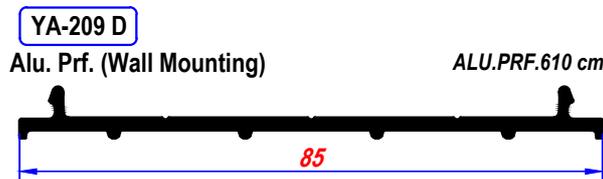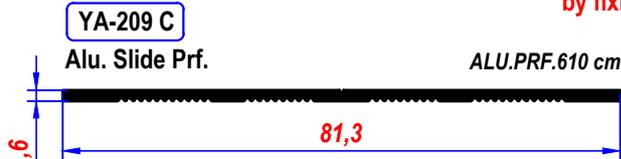

YA-209 D is mounted to the ceiling or wall with screws, then the aluminium led case, s fitted with tightly.

<b>YA-207 D</b> Single Suspension wire
<b>YA-207 D1</b> Double Suspension wire
<b>YA-207 E</b> ZM-PION Connector
<b>YA-207 E1</b> ZM Connector
<b>YA-207 E 2</b> Fastener Connector

**ANGLE CUTTING FRAME APPLICATION**

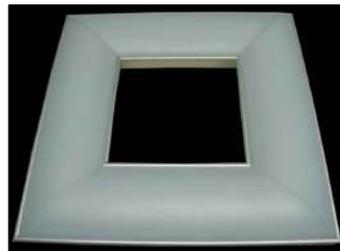


- YA-209 K1** Angle: 30 Connector
- YA-209 K2** Angle: 45 Connector
- YA-209 K3** Angle: 60 Connector
- YA-209 K4** Angle: 90 Connector
- YA-209 K5** Angle: 120 Connector
- YA-209 K6** Angle: 135 Connector
- YA-209 K7** Angle: 150 Connector

Frames can be produced in different shapes by making angled cuts.

All cutting dimensions and geometric shapes can be done according to requirements

**YA-223**


Alu. Linear Case  
**SLIM LINEAR**

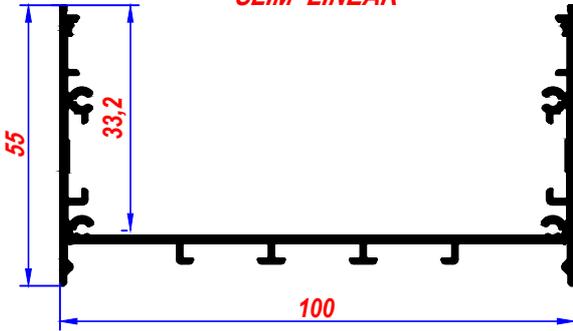

**REQUESTED COLORS CAN PAINTED**  
Suitable for Square, Rectangle, Hexagon etc.


**YA-224**

Alu. Linear Case

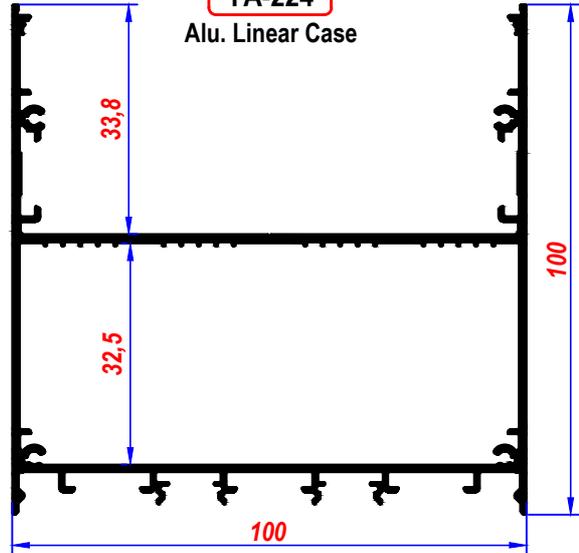


**YA-224 C**

PC. Diffuser




**YA-224 D**

Alu. Prf. (Wall Mounting)

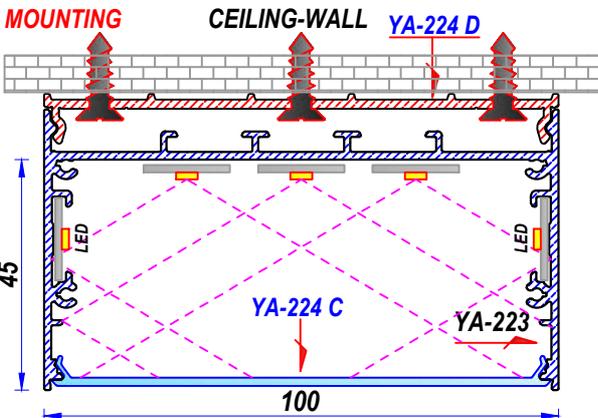


**EXTERNAL DRIVER, SLIM LINEAR PRODUCT**

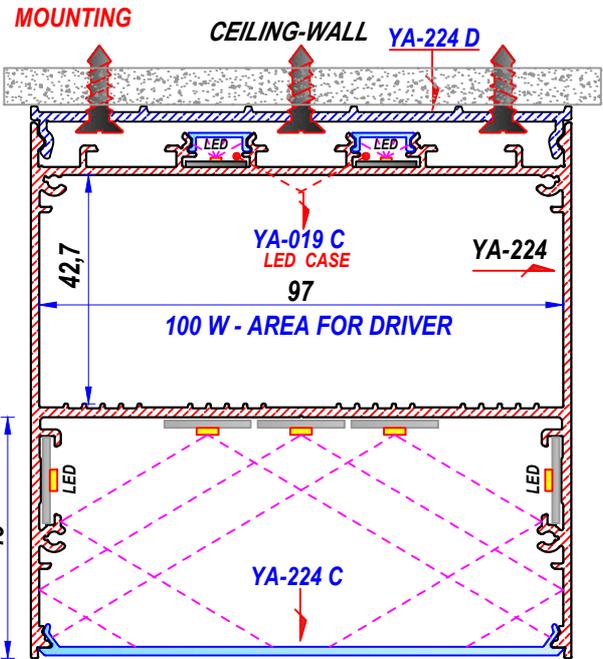

**PROVIDES UP AND DOWN LIGHTING  
IN PENDANT LIGHTING APPLICATIONS**

**YA-223 T**

Alu. L End Cap

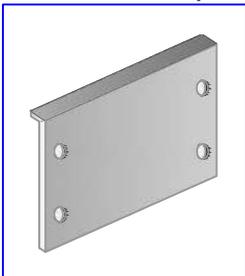

Produced in requested color

**YA-019 C**

PC. Diffuser



Opal-Transparent  
Black Color PC, coming soon  
used for Pendant Lighting

**YA-207 D**

Conductive Fasteners



Suspension wire special length is available

**YA-207 D1**



**YA-224 T**

Alu. L End Cap



Produced in requested color

Light scattering is prevented  
by new end cap

L-Shaped to Light Proof

Light scattering is prevented by YA 223 T.

All cutting dimensions and geometric shapes can be done according to requirements

WIDTH OF THIS LINEAR LED CASE IS FIRST IN TURKIYE

**YA-216**  
Alu. Linear Case




Suitable for high ceiling applications such as;  
Entertainment Venue - Lobby - Showroom etc.  
Building - Facade Lighting Applications

**YA-216 A**  
Alu. Prf.  
Ceiling Mounting-Slide Prf.





For high ceiling applications, the ceiling mounting profile,  
can also be used as an internal slide profile.

**YA-216 B**  
PC.Diffuser  
OPAL

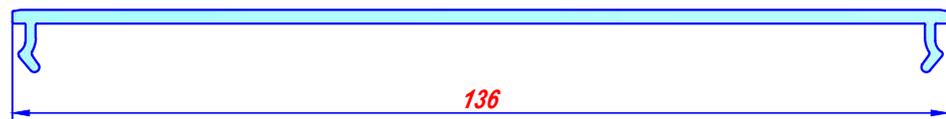


Suitable for emergency and routing lighting in large  
facilities such as Airport - Stadium - Tunnel - Metro Station

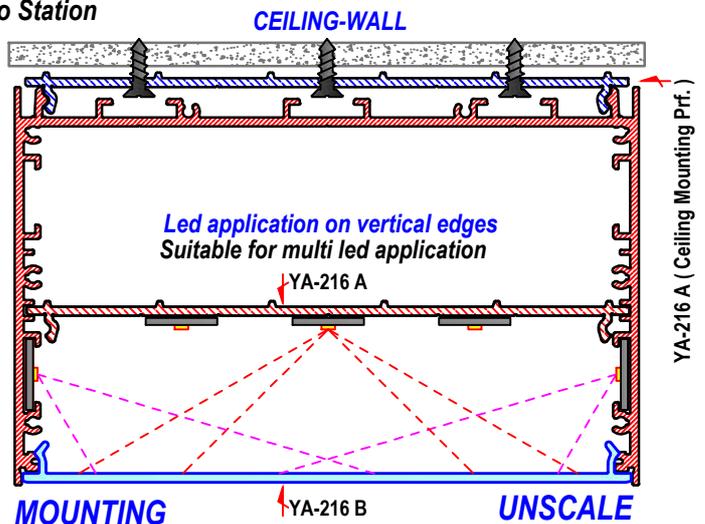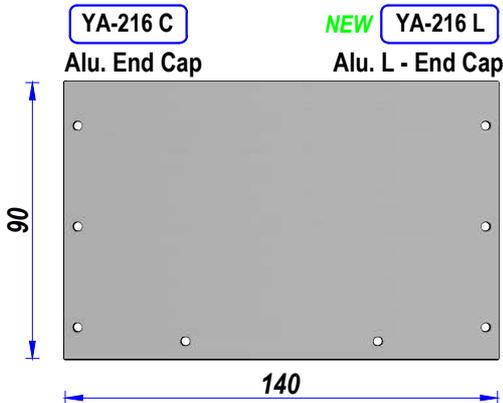

All cutting dimensions and geometric shapes can be done according to requirements


HIGH CEILING IP65 ALU. LED PROFILES AND ACCESSORIES

**YA-1201**  
Alu. Led Case  
HIGH CEILING

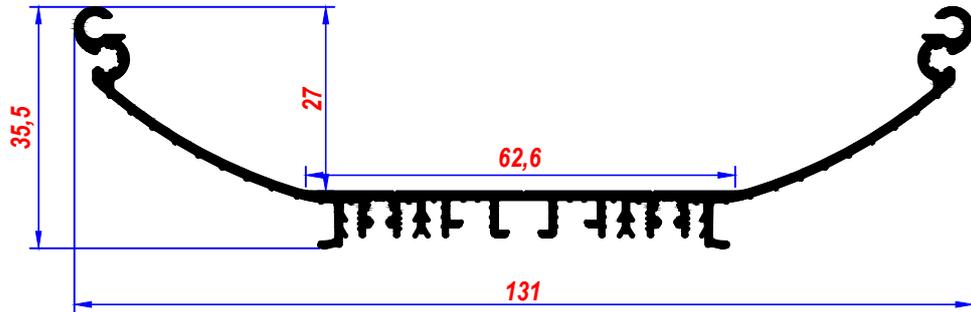

**YA-1202**

Alu. Driver-Box Prf.

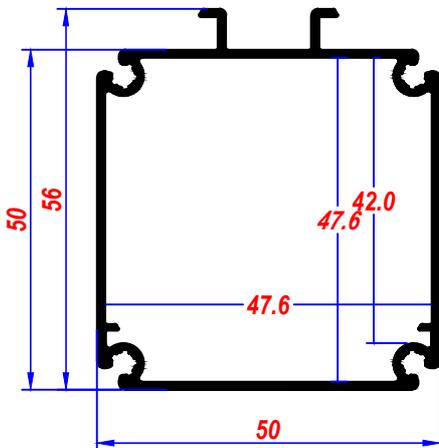


**YA-1201 C**

Acrylic Diffuser




**YA-1202 T**

Metal End Cap - Gasket

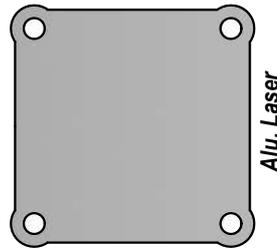


**YA-1201 TL**

Metal End Cap - Gasket

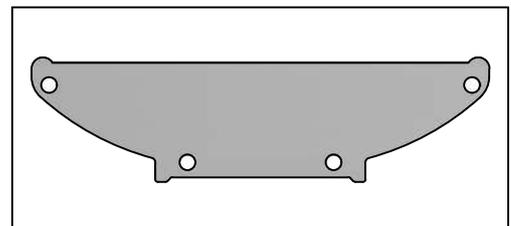

Plastic End Cap is coming soon

YA-1201 ALU. LED CASE AND ACCESSORIES

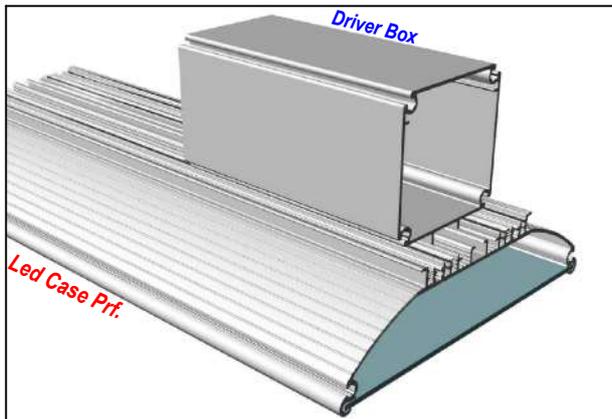

ALUMINIUM PROFILE 610 cm

For the illumination of high-ceiling industrial spaces, it provides maximum lighting. It is a high-efficiency, durable, high-quality, economical, and modern option

Pendant and surface-mounted, with clip installation options, it is easy to install and maintain.

Compatible with IP65 protection, a new economical product.

**YA-1203 D**

Wall Mounting Acces.



Spring Steel - H = 12,5mm

**YA-207 D**

Conductive Fasteners




Single suspension wire  
1,5 - 3 - 4,5 - 6 mt length


HIGH CEILING, FACTORY LIGHTING




**HIGH CEILING IP65 ALU. LED PROFILES AND ACCESSORIES**

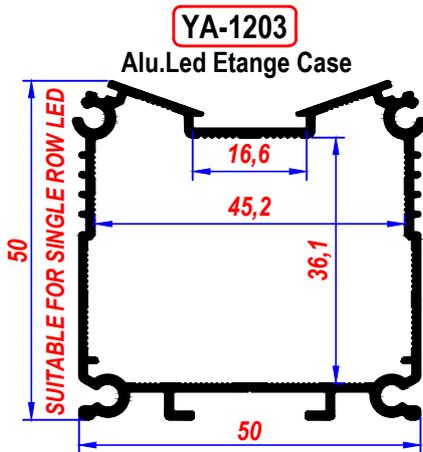

YA-1203 ALM. YA-1203 C PC.

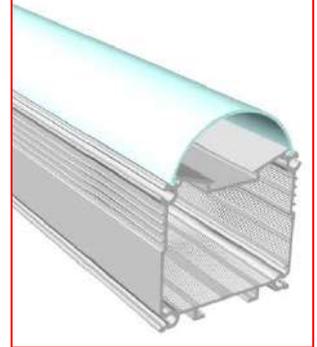

ALM. PRF. - PC. DİFÜZÖR 610 cm

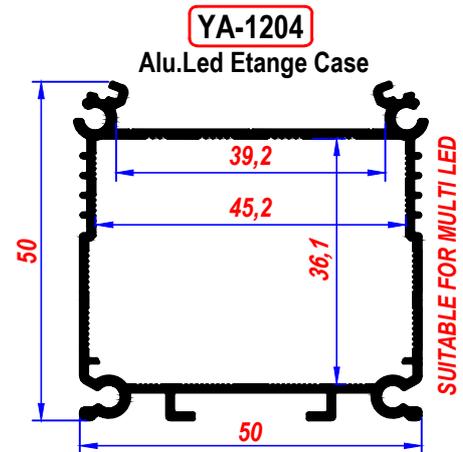

ACCESSORIES ARE SUITABLE FOR BOTH OF THEM

YA-1203 D


Wall Mounting Acces.



SPRING STEEL

YA-1203 C

PC Diifuser

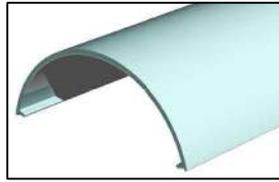


Length 610 cm

- \* Parking lot - High Ceiling Lighting
- \* More economic than similar
- \* Suitable for IP 65, Indoor - Outdoor Product
- \* Field of Driver; 36,1 x 45,2 mm ( Suitable for Emergency Lighting )
- \* Easy ceiling installation with spring steel
- \* Accessories are suitable for Pendant Lighting
- \* Suitable for angle regulation with the mountable foot set (YA 253 series) on the lower plug.

YA-201 D

Wall Mounting Acces.

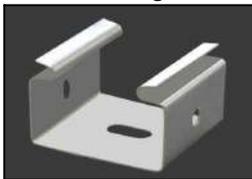

Spring Steel - H=12,5mm

YA-207 D

Conductive Fasteners



Single suspension wire  
1,5- 3- 4,5- 6 mt length

YA-1203 T

Plastic End Cap - Gasket



Light Gray

Gasket

Glass reinforced polyamide

**YA-1203 ALU.PRF. and ACCESSORIES**


Alu.Prf.-PC Diffuser 610 cm



YA-1203 T

YA-1203 D


PRODUCT SUITABLE FOR USE IN BUS-TRAIN-STATIONS

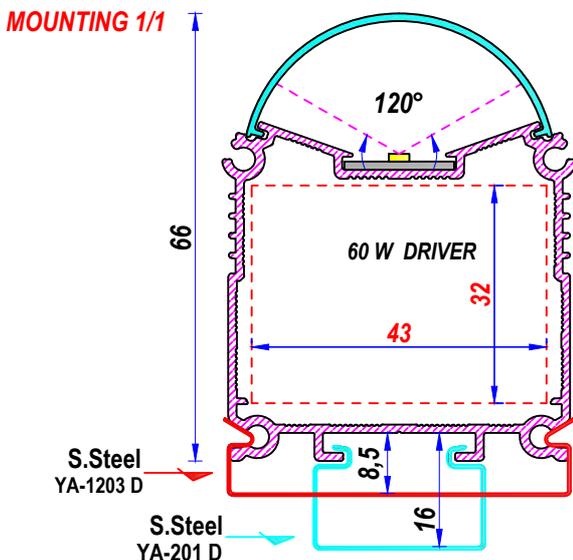


All cutting dimensions and surface coatings can be done according to requirements

**NEW** YA-1206 Y

Alu.Led Etange Case  
Flat - Dome Diffuser

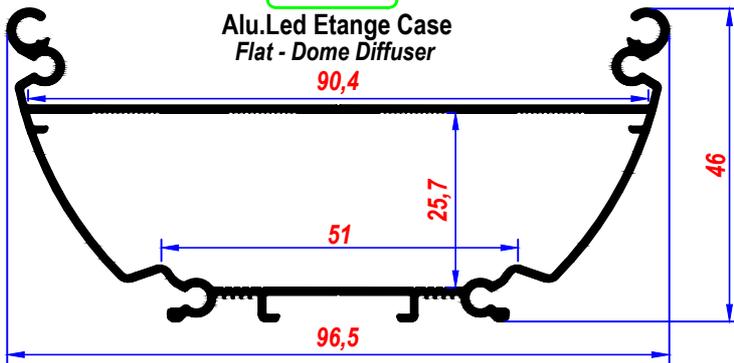


YA-1206 Y & YA-206 G

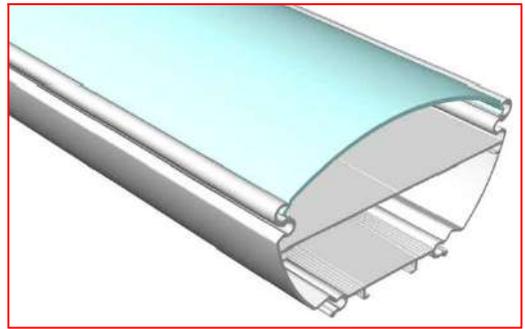

ALU. PRF. - PC. DIFFUSER 610 cm

YA-206 G


PC. Dome Diffuser  
Opal

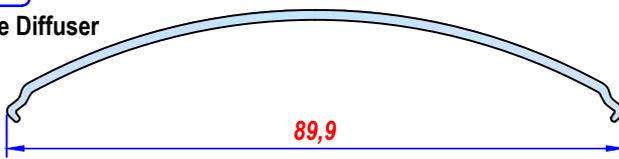

P.C. PRF. 305 cm


YA-1206Y TB

Alu. Laser End Cap  
Thickness; 1,5 mm

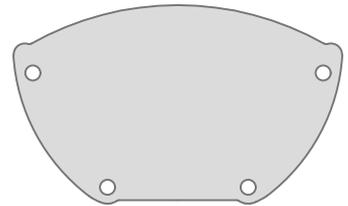

YA-1206Y TD


Alu. Laser End Cap  
Thickness; 1,5 mm

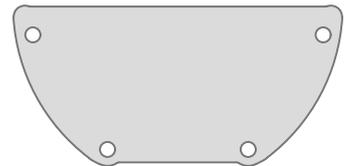

**NEW**

YA-1206Y C

Acrylic Diffuser



- \* Easy ceiling installation with stainless steel clips.
- \* Accessories suitable for pendant installation.
- \* Option to use two different diffusers.
- \* Can be used as an angular profile by installing the leg set (ya 253 series) onto the bottom clip slot.

YA-207 D

Ceiling Suspension Bracket  
Single - Chrome





Standard wire length: 1.5 mt

YA-1203 D




Wall Mounting Acces.



Stainless Steel

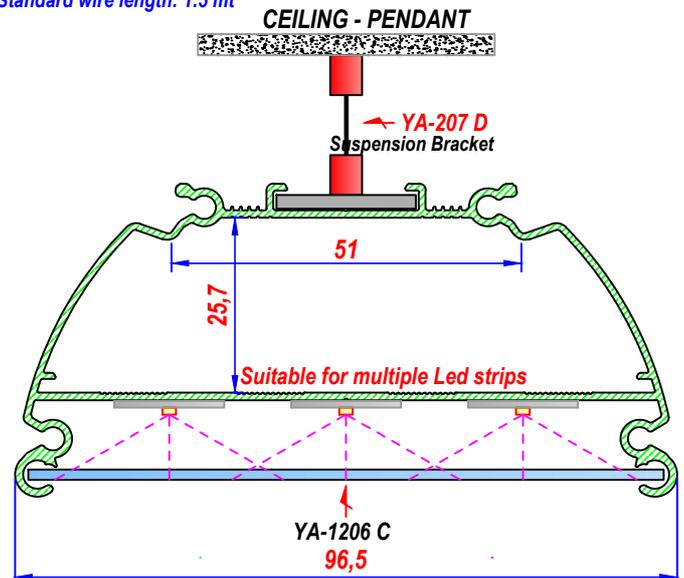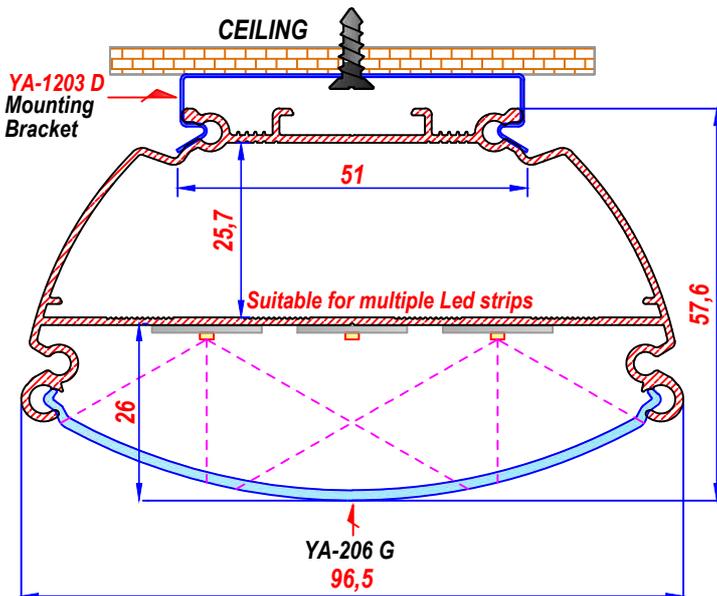




All cutting dimensions and surface coatings can be done according to requirements

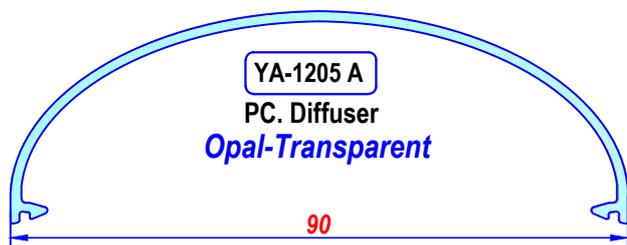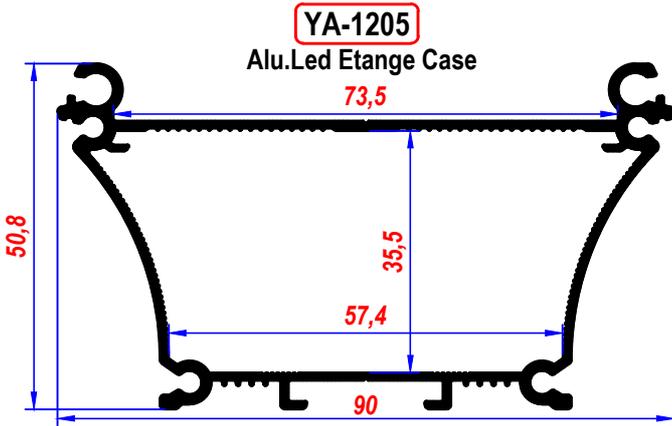


PARKING LOT APPLICATION



- \* Due to rubber sealing, etange case IP 66 is provided
- \* Field of Driver; 35,5 x 57,4 mm ( Suitable for Emergency Lighting )
- \* Easy ceiling installation with spring steel
- \* Accessories are suitable for Pendant Lighting
- \* Suitable for angle regulation with the mountable foot set (YA 253 series) on the lower plug.
- \* Suitable for Indoor / Outdoor usage

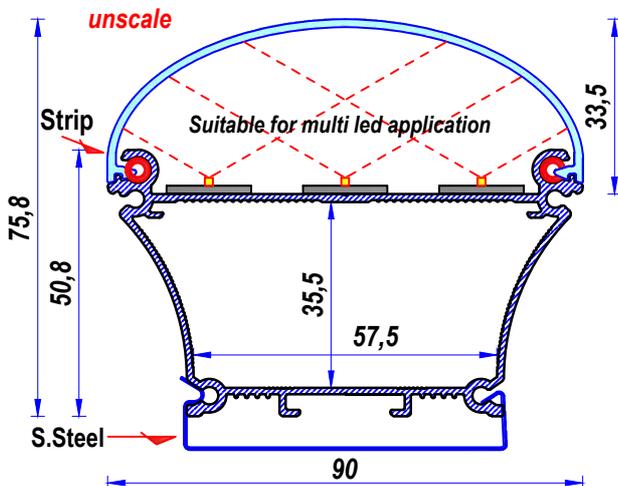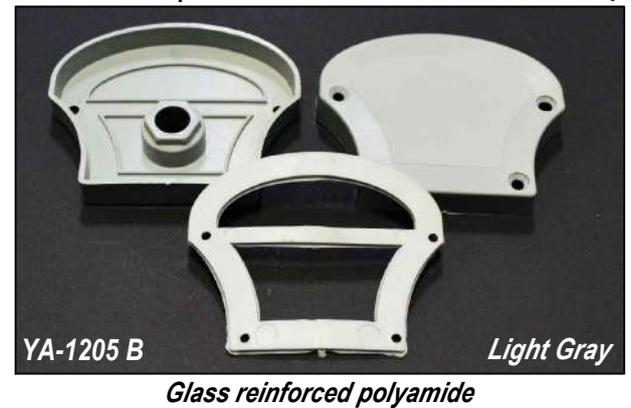


YA-1205 ALU.PRF. and ACCESSORIES

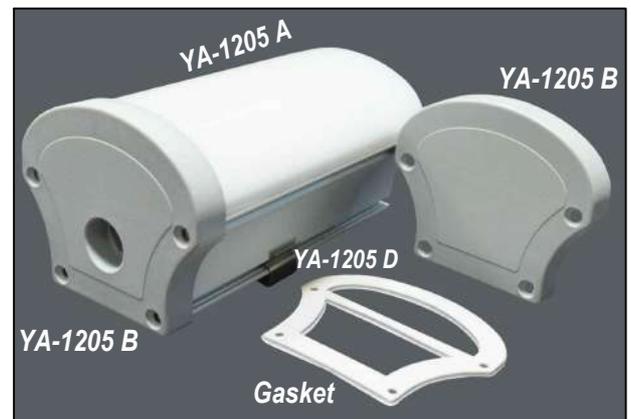


All cutting dimensions and surface coatings can be done according to requirements


**YA-208**  
Alu.Led  
Etange Case

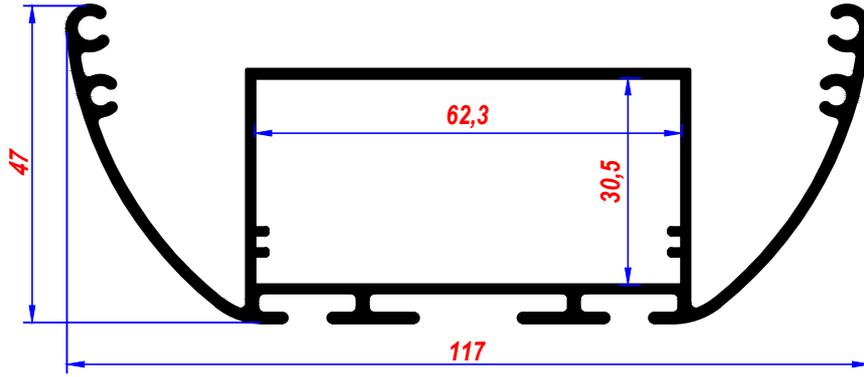


**YA-208 A**  
PC. Diffuser  
Opal - Transparent

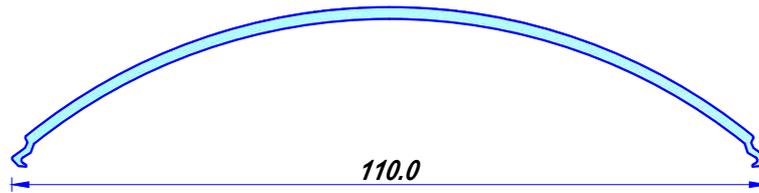

**YA-208 B**  
Plastic End Cap  
Black

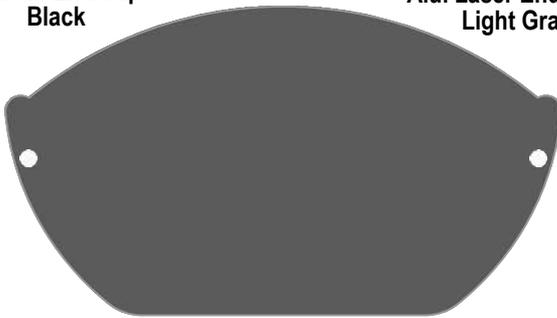

**YA-208 C**  
Alu. Laser End Cap  
Light Gray

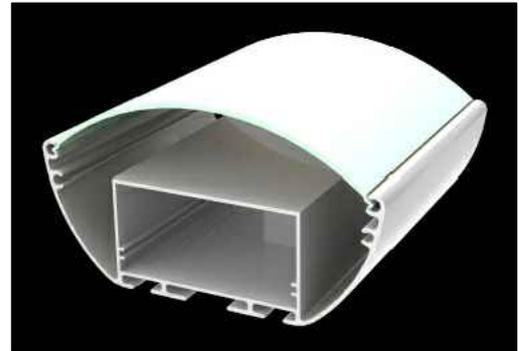

YA-208 YA-208 A ALU.PRF. 610 cm



**YA-P01**

**USAGE AREA; INDOOR / OUTDOOR AND AQUARIUM**



**YA-P01 A**

Alu.Led Etange Case

PC. Diffuser  
Opal - Transparent

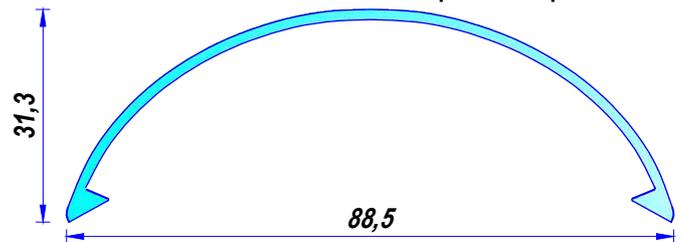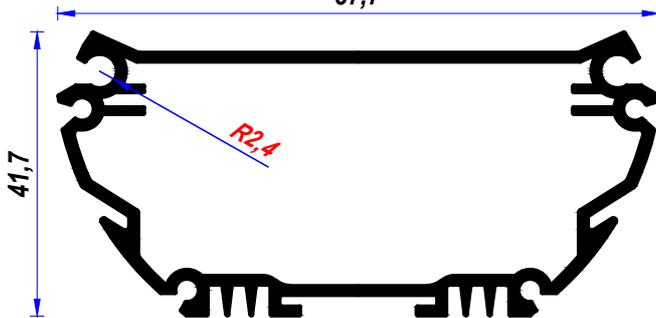


**YA-P01 B**  
Alu. Laser End Cap  
Light Gray

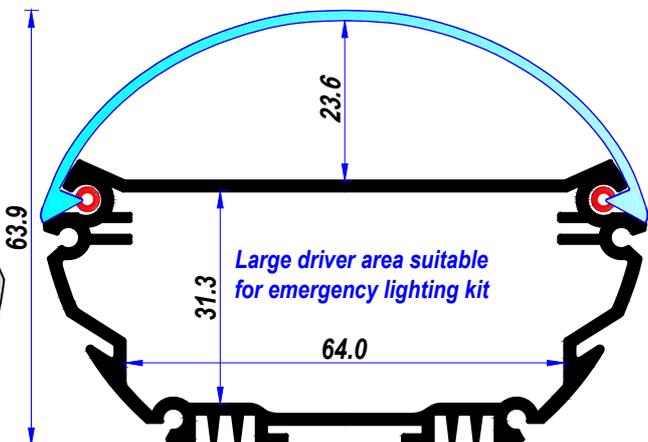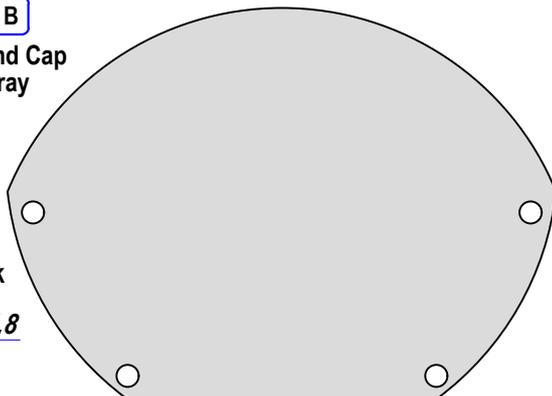




**YA-1205 C**  
Elastron Wick




**HIGH CEILING IP66 PC - COEX ETANGE CASES**

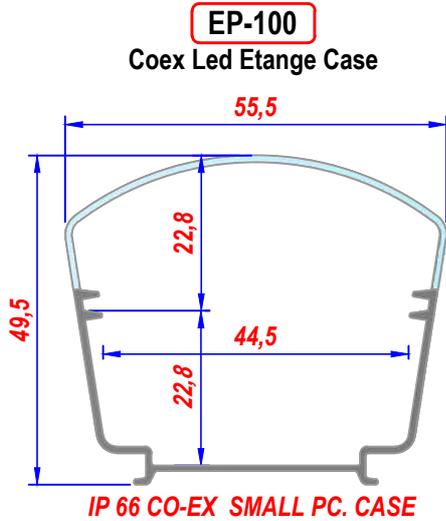

*Parking Lot - High Ceiling Lighting  
Easy ceiling installation with Spring Steel  
Suitable for Indoor & Outdoor Application  
More economic than similars*

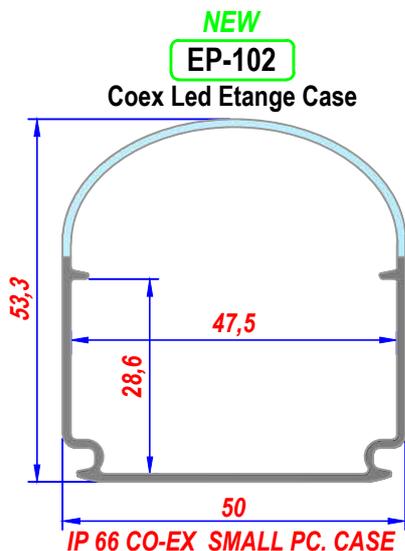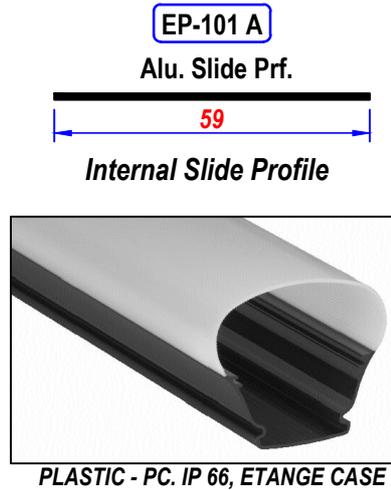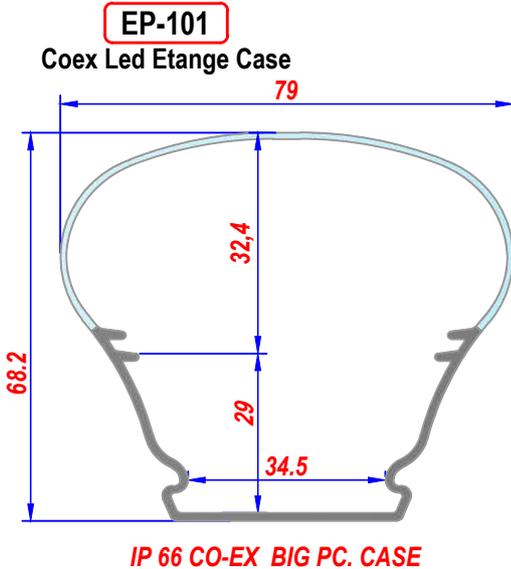


*Parking Lot - High Ceiling Lighting  
Easy ceiling installation with Spring Steel  
Suitable for Indoor & Outdoor Application  
More economic than similars*

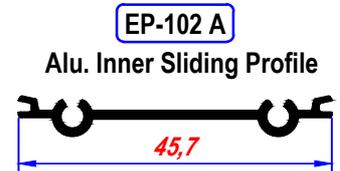

*All cutting dimensions and surface coatings can be done according to requirements*

TWO TYPES OF PC DIFFUSER OPTION FOR IP66 REQUIREMENT

**YA-045**  
Alu.Led Case




IP 65 , For Indoor & Outdoor  
Suitable for NEON LEDs,  
Module LEDs


**YA-045 A**  
Straight P.C.Diffuser



**YA-045 B**  
Oval P.C.Diffuser



**YA-045 C**  
U - P.C.Diffuser




**YA-045 D**  
Wall Mounting Acces.



Stainless Steel

Three different PC. Diffuser,  
It can also used as pendant lighting  
IP 65 PC. Diffuser

**YA-045 E**  
Plastic End Cap

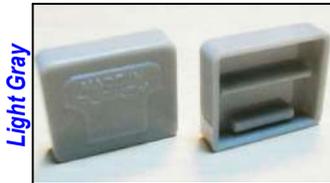

Suitable for YA-045 A

**YA-045 F**  
Plastic End Cap




Suitable for YA-045 C

**YA-045 G**  
Plastic End Cap




Suitable for YA-045 B


YA 045 A - YA 045 C PC DIFFUSER APPLICATION

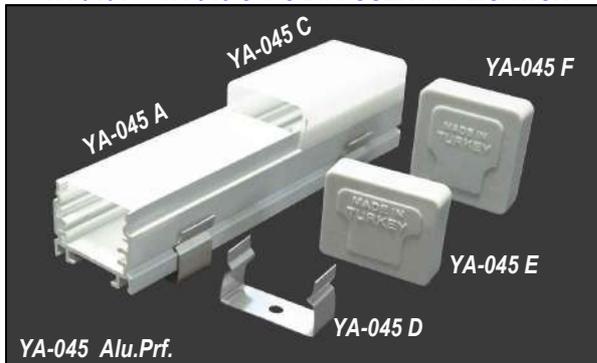


YA 045 B PC DIFFUSER APPLICATION

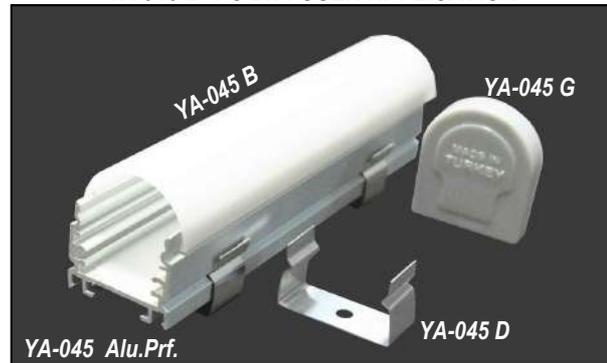


YA-045 Alu.pr.

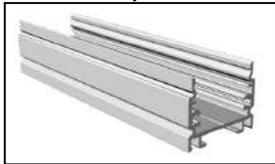


YA-045 YA-045 A

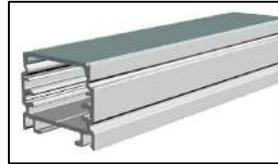

YA-045 YA-045 C

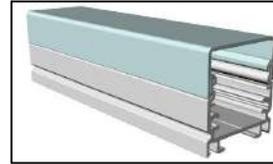


YA-045 YA-045 B

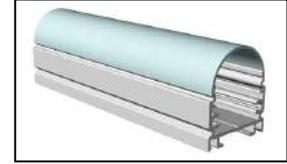

PC.DIFFUSER-ALU.PRF. 610 cm






PC.DIFFUSER-ALU.PRF. 610 cm

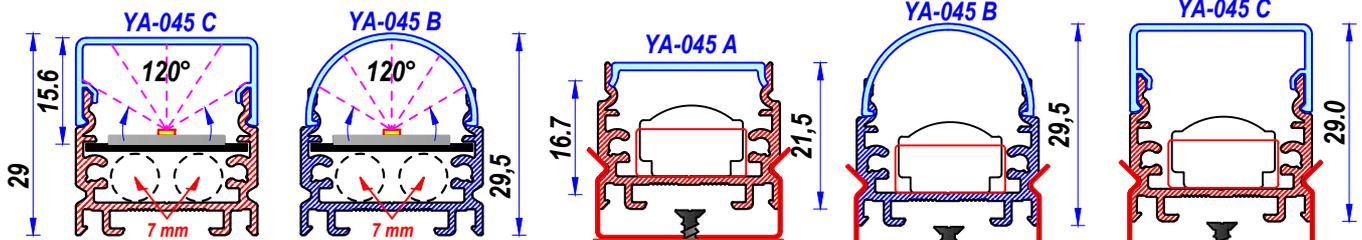


By using the internal slide profile, continuous application is provided in indoor and outdoor

All cutting dimensions and surface coatings can be done according to requirements

**EXTERIOR ARCHITECTURAL LED LIGHTING PROFILES AND ACCESSORIES**

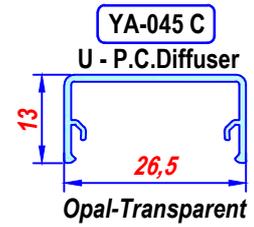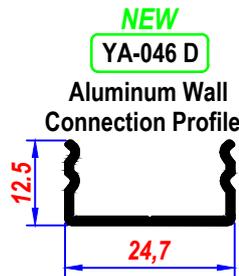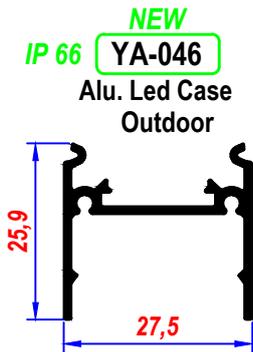

IP 66 for Outdoor Usage

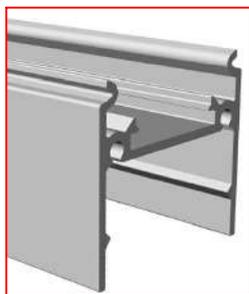

ALU. PRF. 610 cm

ALU. PROFILE 610 cm

PC Diffuser 610 cm




Custom wire sizes are available upon request

Suitable for Neon LED, module LED, and 3-wire LED strip applications.


IP66-rated, featuring two PC diffuser options and a two-step aluminum wall connection profile.

Designed for outdoor use, suitable for suspended installation when required.

YA-046 D aluminum profile can be used as a cable channel and wall mounting profile, available in full lengths or in pcs.

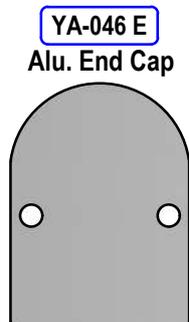

Thickness; 1.5 mm

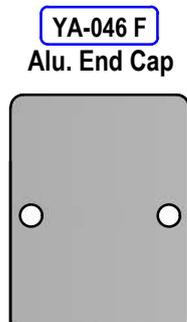

Thickness; 1.5 mm




L.GRAY / TRANSPARENT  
SUITABLE FOR YA-045 B

**YA-045 B PC DIFFUSER APPLICATION**



**YA-045 B PC.**

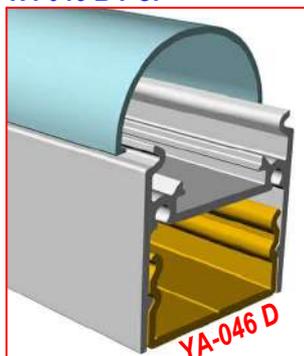


ALU.PC.PRF. 610 cm

**EXTERIOR FACADE APPLICATION**





**YA-045 C PC.**





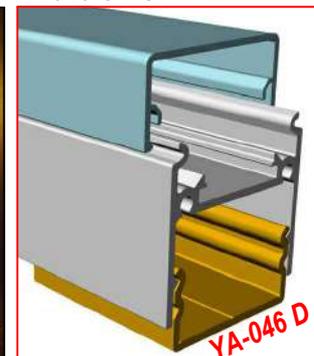


ALU.PC.PRF. 610 cm

All cutting dimensions and surface coatings can be done according to requirements

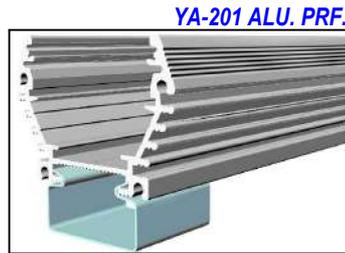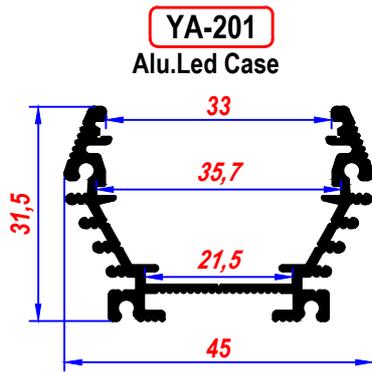

More functional than similar  
Two different diffuser & slide options  
Four different end cap options  
Economic product with high cooling capacity

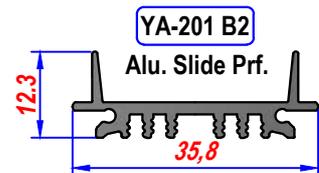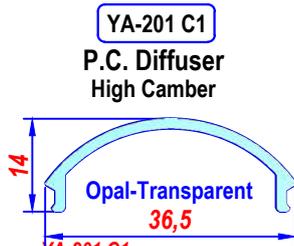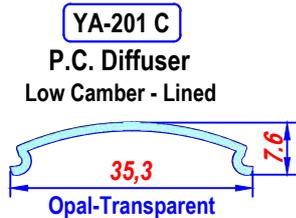
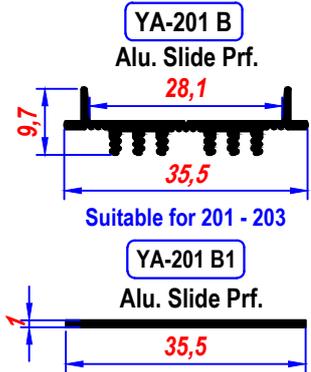


Spring Steel - H=12,5mm


YA-201 ALU.PRF. AND ACCESSORIES



Beam Angle Regulation with Mounting Bracket, it can be mounted on the lower part of Alm. Case.

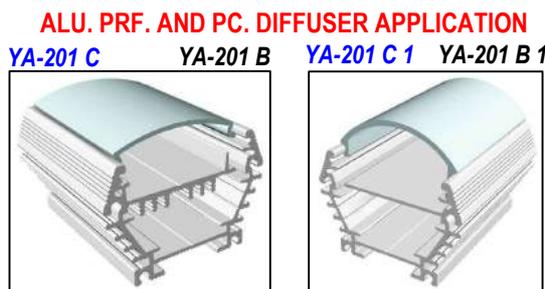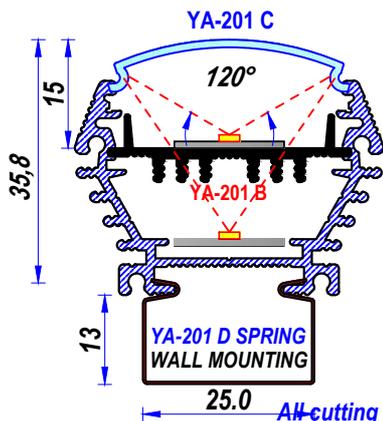


PC.DIFFUSER-ALU.PRF. 610 cm

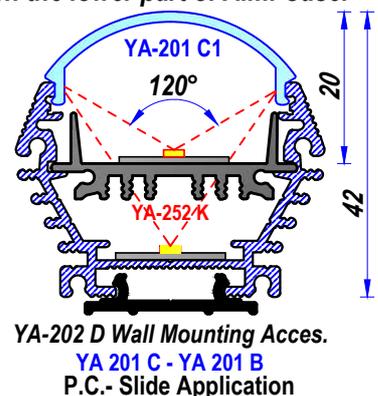

YA-202 D Wall Mounting Acces.  
YA 201 C - YA 201 B  
P.C.- Slide Application

All-cutting dimensions and surface coatings can be done according to requirements

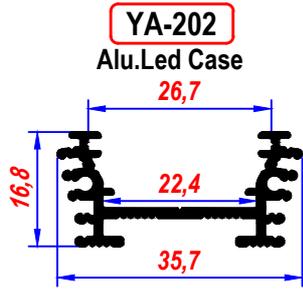

Mould of YA-202 is upgraded  
IP 65, Suitable for Indoor - Outdoor




Single-Two row LED can be applied  
IP 65, Suitable for Indoor - Outdoor  
Can also be applied as pendant lighting


YA-201 D



YA-202 A




YA-202 D

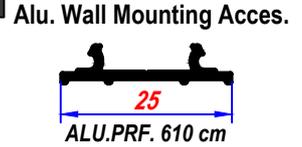


High Cooling Capacity  
Four different PC.Diffuser options


YA-202 B




YA-016 B



YA-204 B

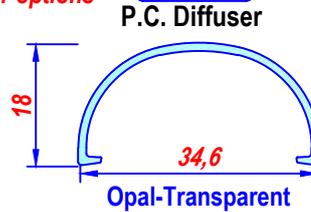


YA-204 C

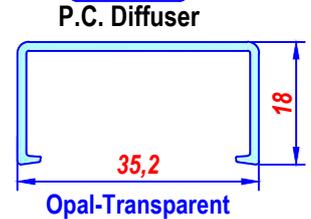


PC.DIFFUSER-ALU.PROF. 610 cm


IP 65, 2 Different PC Diffuser

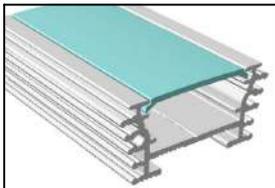


YA-202 ALU. YA-202 B PC.

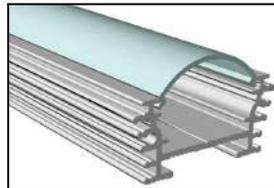

YA-202 ALU. YA-016 B PC.

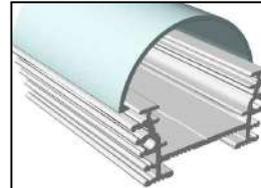

YA-202 ALU. YA-204 B PC.

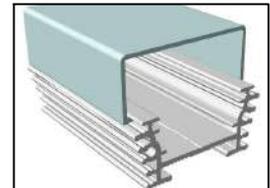

YA-202 ALU. YA-204 C PC.

YA-202 F

Alu. End Cap



Laser Cut - Light Gray

YA-202 C

Alu. End Cap



Laser Cut - Light Gray

YA-202 G

Alu. End Cap



Laser Cut - Light Gray

YA-202 E

Alu. End Cap



Laser Cut - Light Gray

YA-202 F1

Alu. End Cap



Laser Cut - Light Gray

YA-202 C1

Alu. End Cap



Laser Cut - Light Gray

YA-202 G1

Alu. End Cap



Laser Cut - Light Gray





YA-202 E1

Alu. End Cap





Laser Cut - Light Gray





4 DIFFERENT APPLICATIONS SCALE 1/1

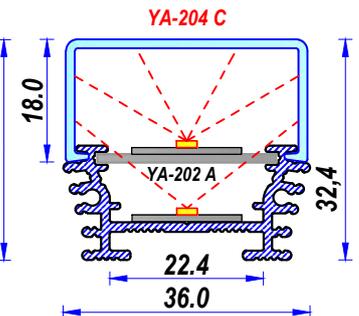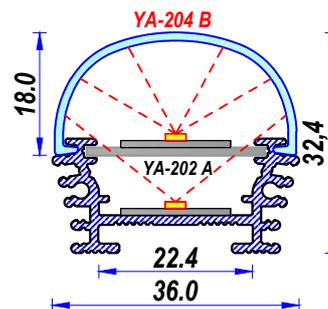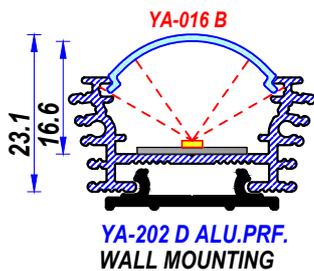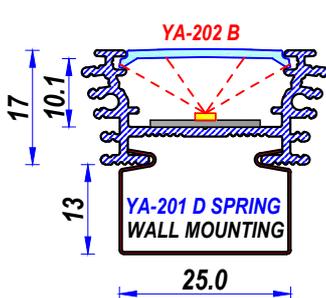


All cutting dimensions and surface coatings can be done according to requirements

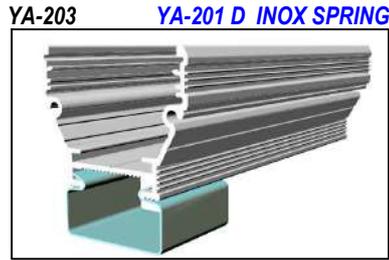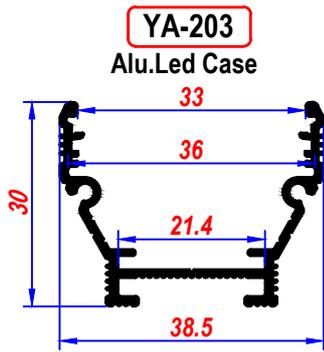

*More functional than similar*  
*Two different diffuser & slide options*  
*Four different end cap options*  
*Economic product with high cooling capacity*

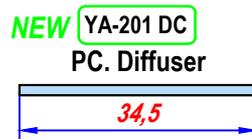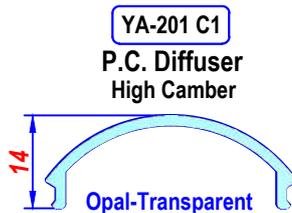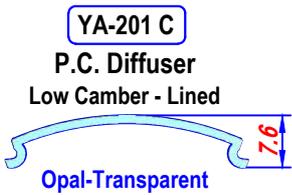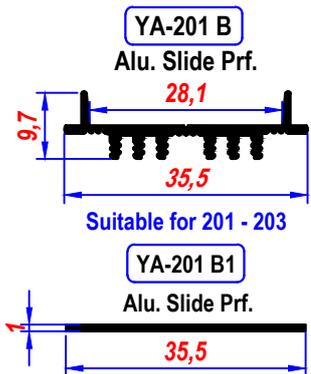

Spring Steel - H = 12,5mm

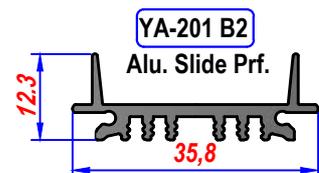

MOUNTING YA 203 YA 201 C 1



YA 253 M Decorative mini mounting Bracket 180° angle application




Light Gray  
IP 66 END CAP






Light Gray  
IP 66 END CAP


YA-203 ALU.LED CASE AND ACCESSORIES

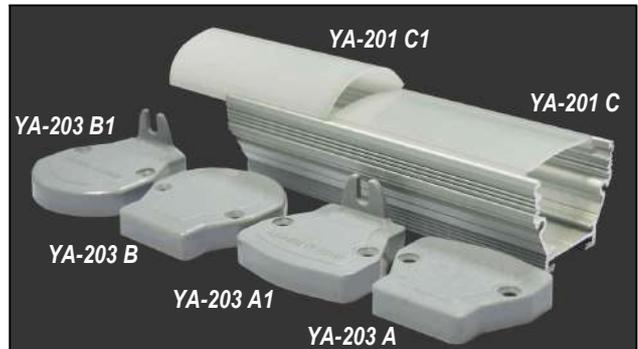

Beam Angle Regulation with Mounting Bracket, it can be mounted on the lower part of Alu. Case.

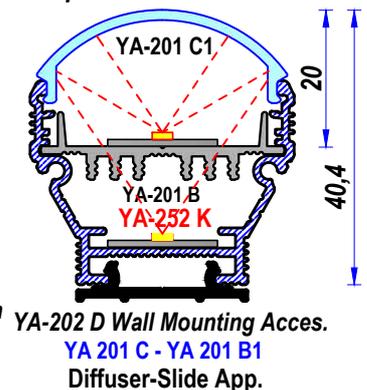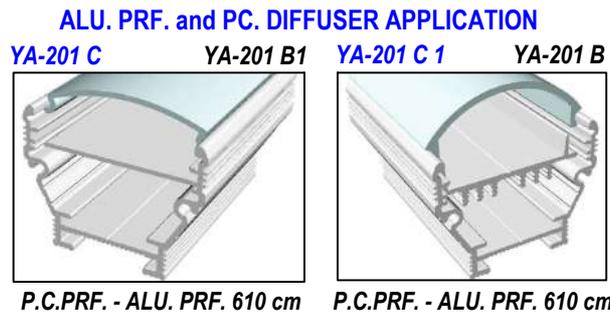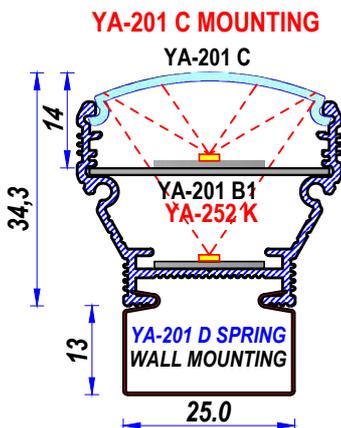


**YA-204**  
Alu.Led Case

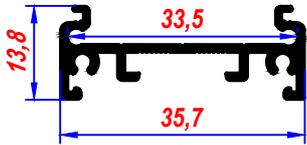


**YA-204 A**  
Aluminum Wall  
Connection Profile





**NEW YA-204 DB**  
Aluminum Wall  
Connection Profile

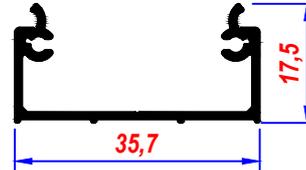

**YA-204 DÇ**  
Wall Mounting Acces.  
Spring Steel H = 10,5mm

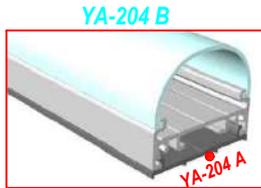


Alüminyum ve PC. Profiller 610 cm

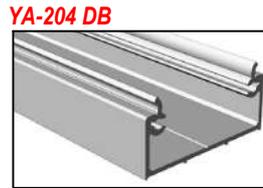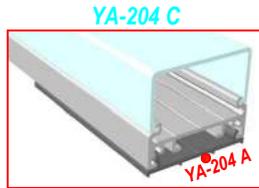



Can also be used as a cable channel




**YA-204 B**  
Oval PC Diffuser

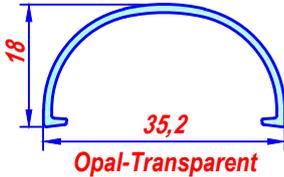

**YA-204 C**  
U PC. Diffuser

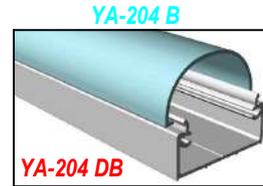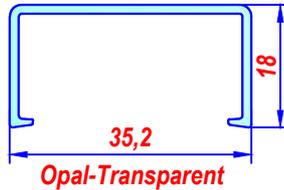

YA-204 DB Aluminum Prf. Compatible with Existing 2 Diffusers  
Alu. laser end cap will be introduced exclusively for 2 products.

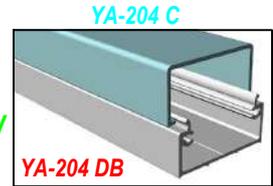

**YA-204 E**  
PC End Cap - Gasket



White

IP 66 END CAP

**YA-204 D**  
PC End Cap - Gasket



White

**YA-204 E 1**  
PC End Cap - Gasket



White - Flanged

IP 66 END CAP

**YA-204 D 1**  
PC End Cap - Gasket



White - Flanged

**YA-204 ALU. CASE & ACCESSORIES**




IP66-rated, suitable for indoor and outdoor use.  
Can be installed as a suspended system when required.  
Available with two PC diffuser options and four IP66 end cap alternatives.  
Compatible with single and double row LED applications.  
Also suitable for use as YA-204 DB and YA-204 DC cable channels.


**YA-204 A WALL CONNECTION PRF.**

**YA-204 DÇ WALL CONNECTION PRF.**


**YA-204 DB WALL CONNECTION PRF.**

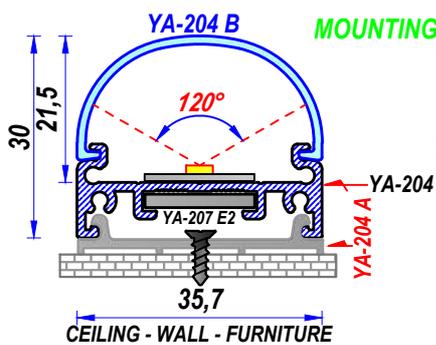

CEILING - WALL - FURNITURE

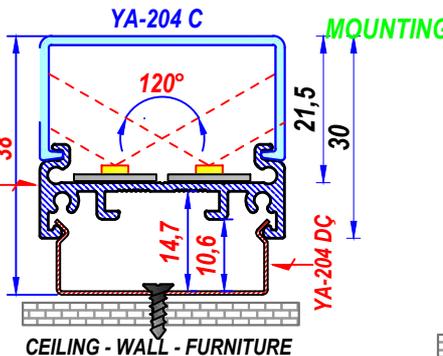



CEILING - WALL - FURNITURE

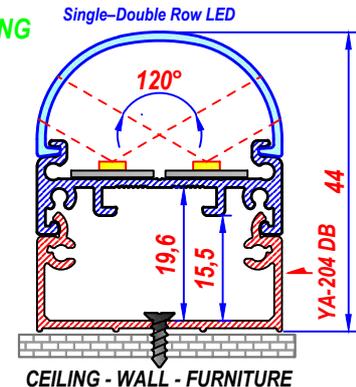


CEILING - WALL - FURNITURE

All cutting dimensions and surface coatings can be done according to requirements


**YA-204 A ALUMINUM LINEAR ECONOMIC SYSTEM**

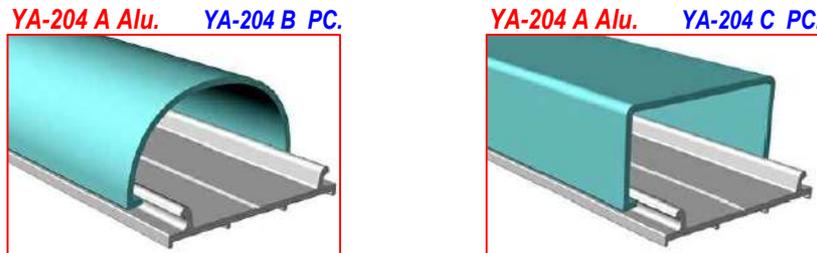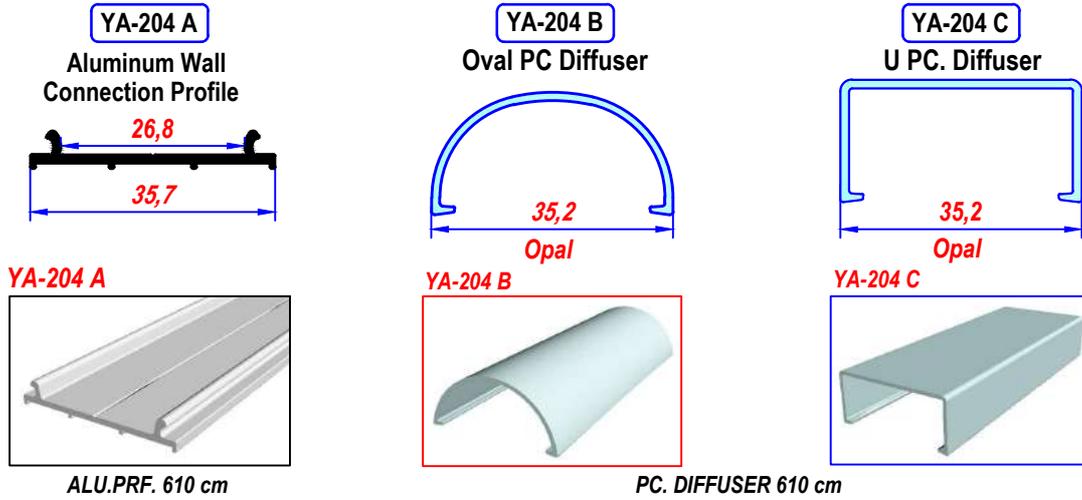

**YA-204 A ALUMINUM PROFILE AND ACCESSORIES**


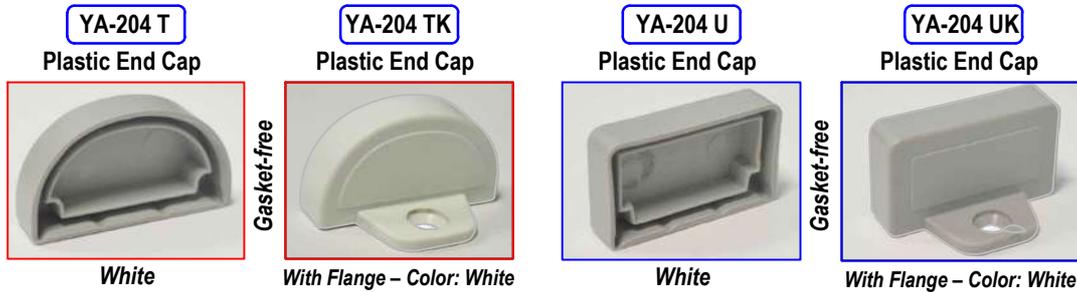


**SUITABLE FOR CEILING AND WALL INSTALLATION WITH FLANGED END CAPS.**  
Four different Plastic End Cap types used with the YA-204 A aluminum profile

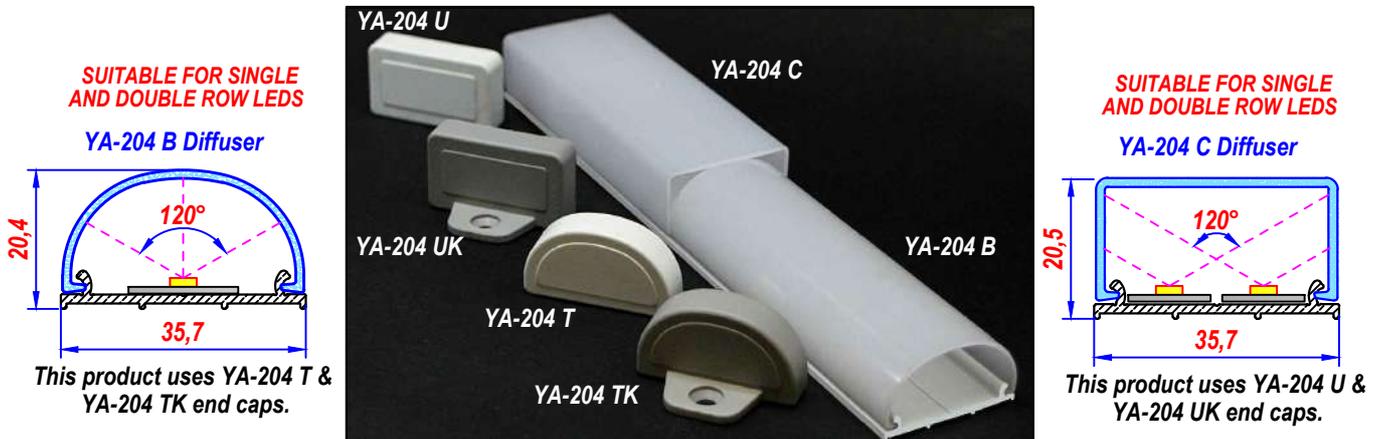


All cutting dimensions and surface coatings can be done according to requirements


IP 66, INDOOR - OUTDOOR LINEAR LIGHTING

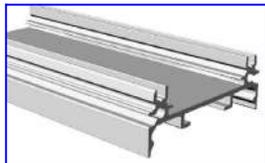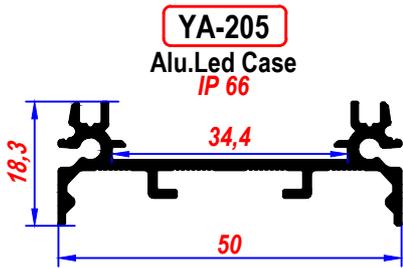


ALU-PC.PRF. 610 cm



YA-205 YA-205 A



YA-205 YA-1203 D

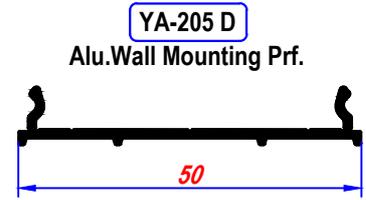

YA-254 C Silicone Strip




Insulation Strip

NEW YA-205 C1 End Cap - Gasket




Plastic Light Gray

NEW YA-205 CK End Cap - Gasket

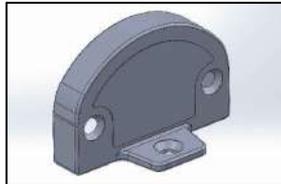

Plastic Light Gray

YA-205 U1 NEW End Cap - Gasket

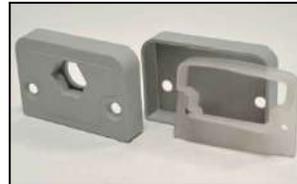

Plastic Light Gray

YA-205 UK NEW End Cap - Gasket



Plastic Light Gray

YA-201 D Wall Mounting Acces.



H=12,5mm

YA-1203 D Wall Mounting Acces.



SPRING STEEL

YA-1203 D Wall Mounting Acces, is suitable for Q8 mm TTR Cable

More functional than other similar profiles

2 different PC. Diffuser Option,


3 different Wall Mounting Acces. Option,

4 different Plastic End Cap Option,



IP 66 is provided with Silicone Strip

MOUNTING

INDOOR & OUTDOOR LINEAR, PENDANT LIGHTING, OR DIRECT MOUNT TO CEILING.


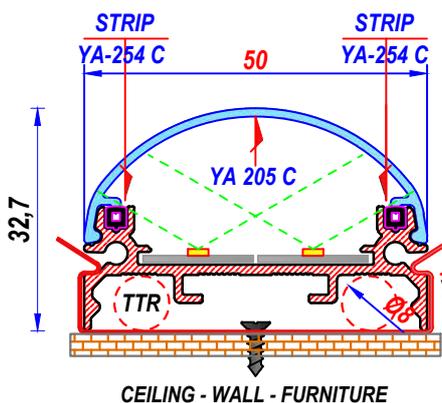


Spring Steel YA-1203 D

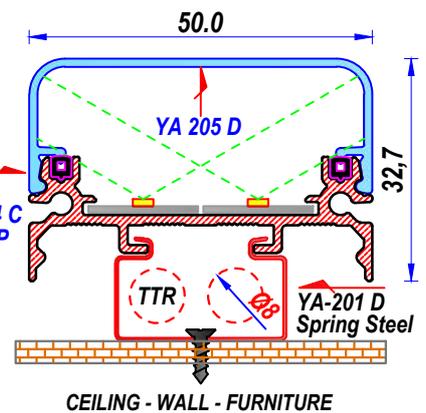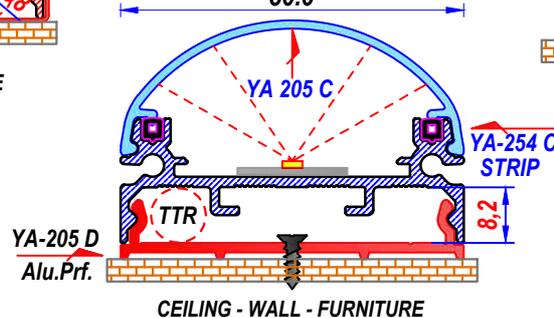

All cutting dimensions can be done according to requirements

IP 66, INDOOR - OUTDOOR LINEAR LIGHTING

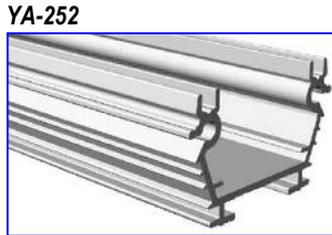
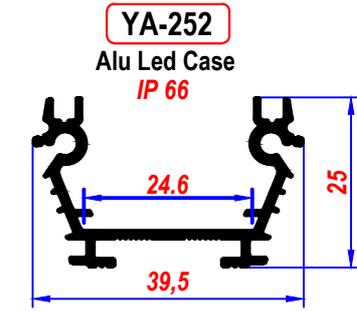


ALM.-PC.PRF. 610 cm


More functional than similar,  
Three different options for Wall Mounting  
Render waterproof with Silicone Seal

The gap btw. Alu. Case and Mounting Access,  
is suitable for 8 mm TTR Cable



Suitable for use as a wallwasher,  
by using an external driver.

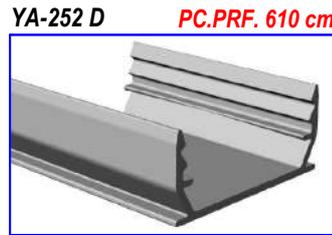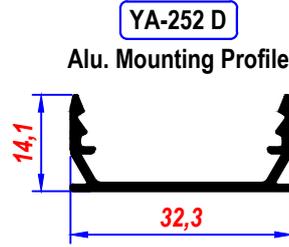


MOUNTING

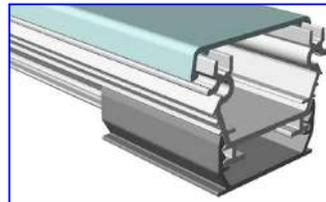

YA-252 YA-252 C YA-252 D  
YA 252 D Alu.Prf.can also  
be used as 5 cm pieces

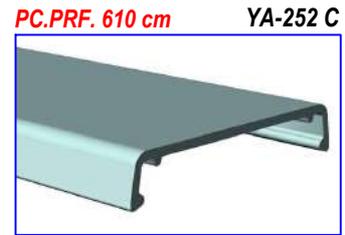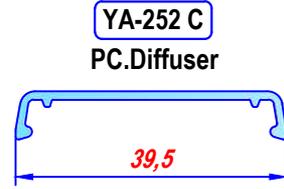

MOUNTING

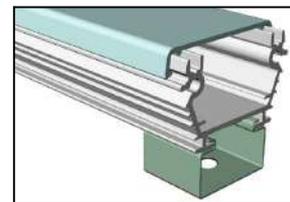

YA-252 YA-252 C  
STAINLESS STEEL CLIPS  
Internal Slide



Suitable for mounting on ceiling, wall, floor,  
Suitable for as a linear pendant lighting.




PC. DIFFUSER SEAL



SPRING STEEL







STAINLESS STEEL

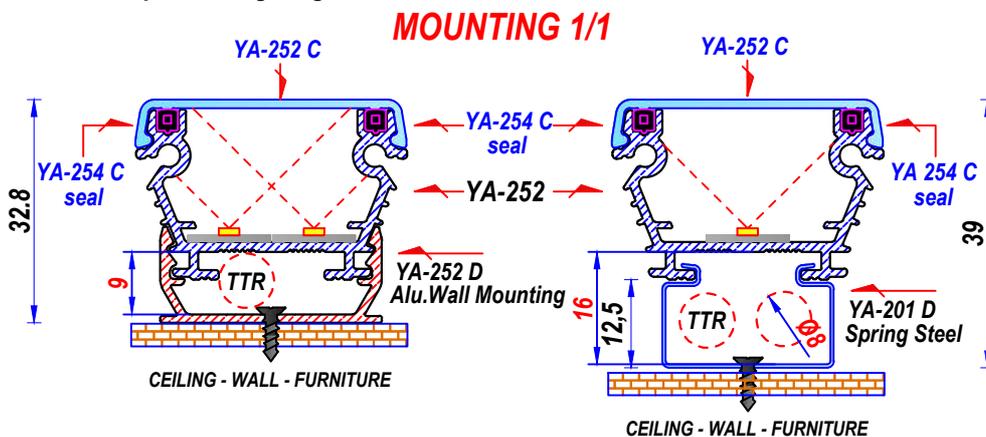

All cutting dimensions can be done according to requirements

LINEAR LIGHTING PROFILE AND ACCESSORIES FOR OUTDOOR IP 66

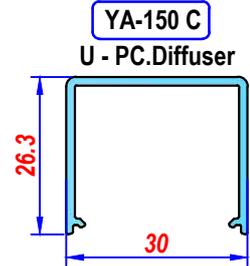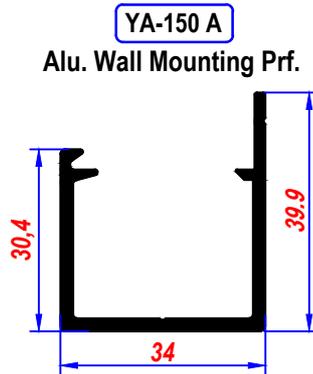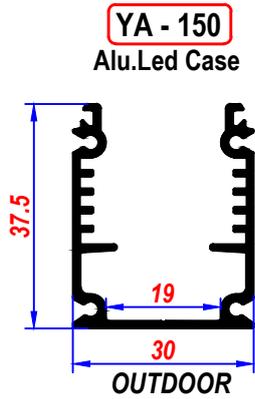


Programmable, show-based facade lighting with software-controlled, Suitable for power cable and control module,



OUTDOOR LINEAR LIGHTING APPLICATION



MOUNTING

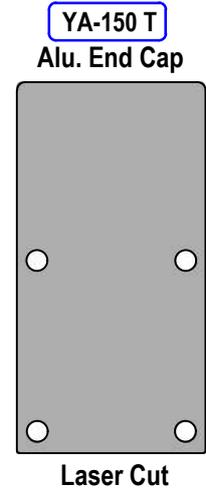


DRIVEWAY, PAVEMENT AND OUTDOOR FLOOR LED PROFILE AND ACCESSORIES

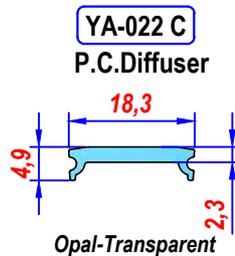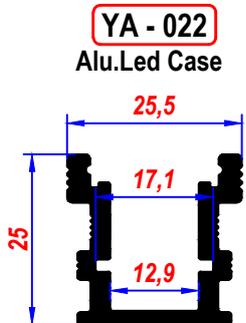

Suitable for 12,9 mm PCB


DRIVEWAY, PAVEMENT, PARKING LOTS, GARAGES, GARDEN & OUTDOOR FLOOR DECORATION

The product is resistant to standard loads. In this product, to provide impermeability of end caps and PC.Diffuser, it is necessary to use a quality transparent silicone.

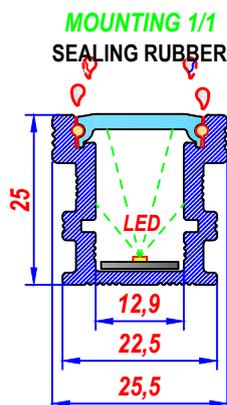

BORDURE STONE APPLICATION METHOD





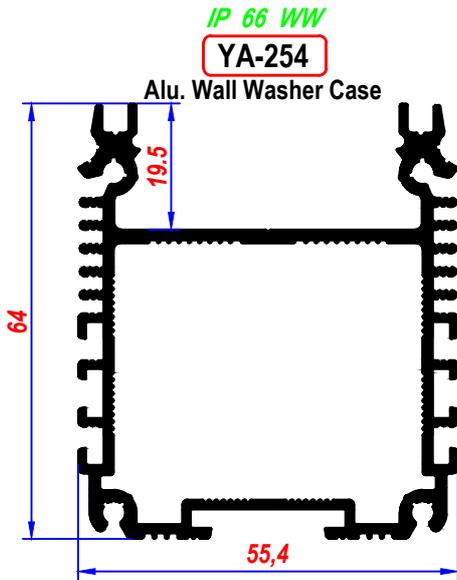

YA-254 YA-254 A YA-254 C



ALU. PRF. - PC.DIF. 610 cm

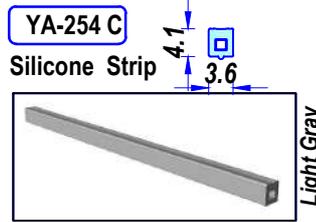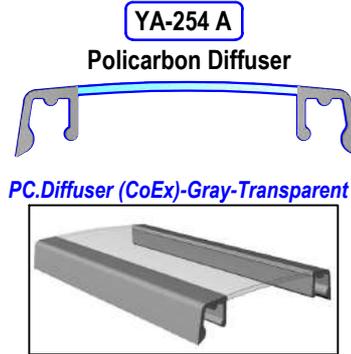

Stainless Steel



Suitable for WW - Projector


**YA-254 ALU. PRF. and ACCESSORIES**



New Wall Washer for IP 66 requirements

New Generation Decorative UV Protective PC. Diffuser (CoEx)

Rubber Sealing, Glass Reinforced End Cap

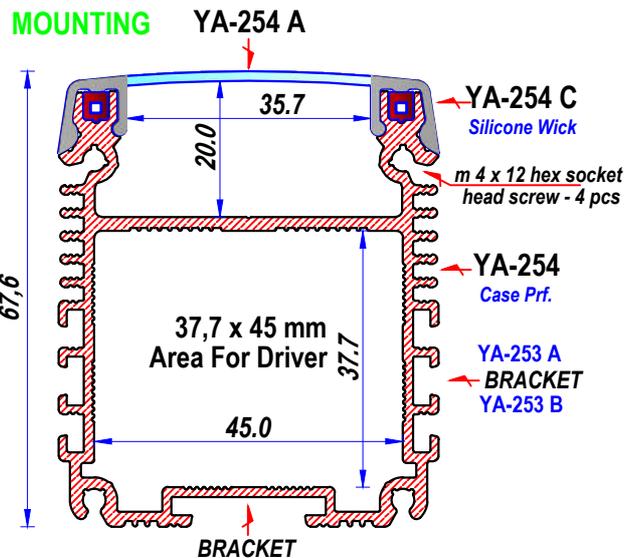

37,7 x 45 mm Driver Area

3 options for fixing the bracket to case( R-L-B )  
DECORATIVE, GLASS REINFORCED PLASTIC END CAP

All cutting dimensions and surface coatings can be done according to requirements

**YA-253 A**


Maxi Bracket Set  
Single Screw



Stainless Steel  
Thickness; 1,5 mm

**YA-253 B**


Mini Bracket Set  
Single Screw

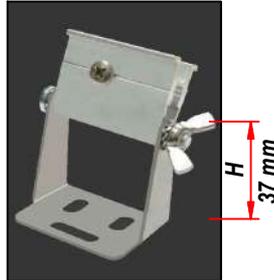

Stainless Steel  
Thickness; 1,2 mm

**YA-253 F**


Special Bracket Set  
Single Screw

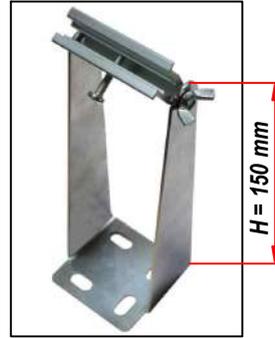

Stainless Steel  
Thickness; 1,5 mm

**YA-253 M**

Mini Bracket Set  
Single Screw

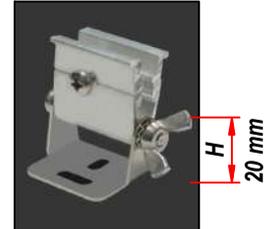

Stainless Steel  
Thickness; 1 mm

**YA-253 C**


Lux Mini Bracket Set  
Double Screw



Stainless Steel  
Thickness; 1,5 mm

**YA-253 D**


Lux Mid Bracket Set  
Double Screw

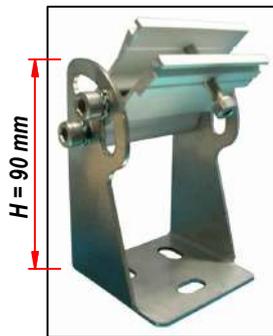

Stainless Steel  
Thickness; 1,5 mm

**YA-253 D 1**


Lux Maxi Bracket Set  
Double Screw

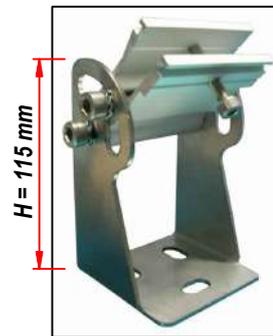

Stainless Steel  
Thickness; 1,5 mm

**YA-253 E**


Lux Maxi Bracket Set  
Double Screw

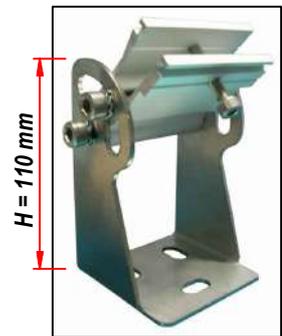

Stainless Steel  
Thickness; 2 mm  
Suitable for Projector Case

**YA-253 L**


L - Shaped  
Extension Bracket

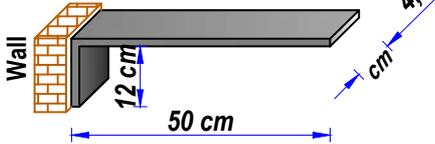

WW - Extension Bracket  
Thickness; 3 mm - Length; 50 cm  
Light Gray - E.static Powder Coating

**YA-253 L 1**


L - Shaped  
Extension Bracket

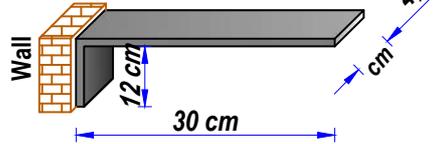

WW - Extension Bracket  
Thickness; 3 mm - Length; 30 cm  
Light Gray - E.static Powder Coating


**YA-253 L 2**

L - Shaped  
Extension Bracket

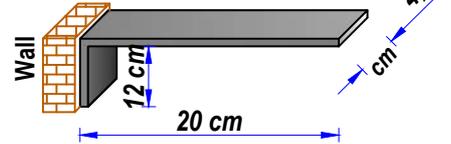


WW - Extension Bracket  
Thickness; 3 mm - Length; 20 cm  
Light Gray - E.static Powder Coating

Light Gray


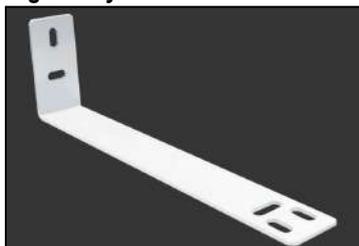


YA 253 L - YA 253 L1 - YA 253 L2

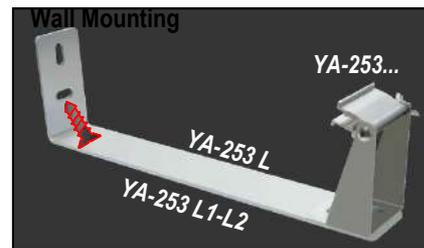

L - EXTENSION BRACKET MOUNTING KIT

All cutting dimensions and surface coatings can be done according to requirements

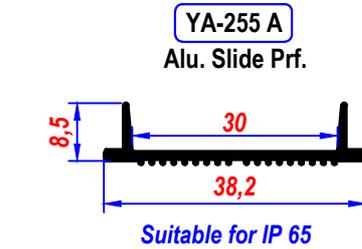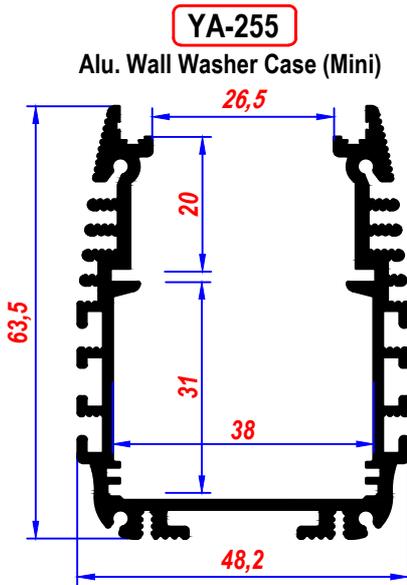

GLASS REINFORCED POLYAMID  
PLASTIC END CAP  
TEMPERED GLASS IN REQUESTED SIZES  
3 OPTIONS FOR FIXING THE BRACKET TO CASE  
right-left-bottom  
**ECO & BEST SELLER**

**YA-255 B**  
Plastic End Cap + Gasket Light Gray



Glass Reinforced polyamid  
M3 x 12 x 4 pcs hex socket head screw

**YA-255 D** PG - 7  
**YA-255 D 1** PG - 9  
Polyamid Coupler-IP 68



Suitable for WW - Projector

**YA-255 E** PG - 7  
**YA-255 E 1** PG - 9  
Metal Coupler-IP 68



Suitable for WW - Projector

**YA-255 PV** Polyamid  
**YA-255 MV** Metal  
Vent Nipple



Suitable for WW - Projector

**YA-253 A**  
Maxi Bracket Set



Stainless Steel

H = 76 mm

**YA-253 B**  
Mini Bracket Set



H = 37 mm

- TEMPERED GLASS IN REQUESTED SIZES
- BRACKET SET SUITABLE FOR CASE; YA-253 A, YA-253 B, YA 253 C
- STAINLESS STEEL BRACKET SET WITH SINGLE-DOUBLE SCREW IN DIFFERENT SIZES

MOUNTING



Bracket set with single-double screw available in different sizes




3 OPTIONS FOR FIXING THE BRACKET TO CASE  
RIGHT - LEFT - BOTTOM

All cutting dimensions and surface coatings can be done according to requirements

**YD-003**

Alu. Wall Washer Case (Mid)

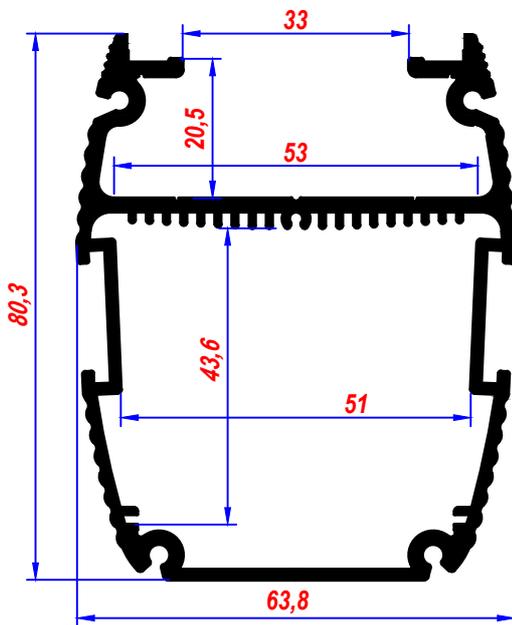

PROVIDED IP 65  
TEMPERED GLASS IN REQUESTED SIZES

**YD-003 A**


Plastic End Cap + Gasket

Light Gray



M 4 X 14 IMBUS HEX SOCKET HEAD SCREW  
Glass Reinforced polyamid

- \* TEMPERED GLASS IN REQUESTED SIZES
- \* BRACKET SET SUITABLE FOR CASE; YA-253 D
- \* BRACKET SET WITH SINGLE-DOUBLE SCREW IN DIFFERENT SIZES

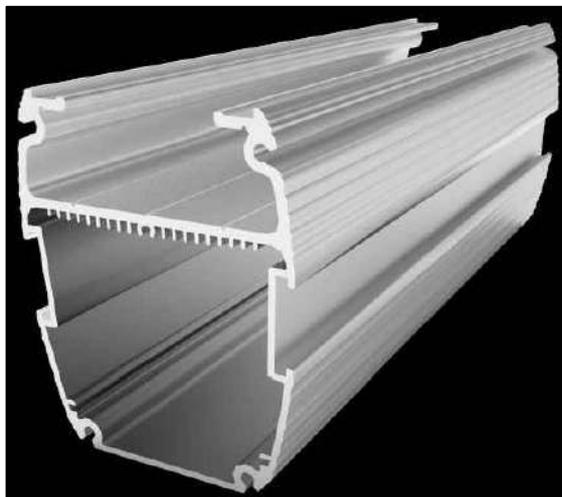

PRF. 610 cm

YD - 003 ALU. PRF.

MOUNTING



YA-253 D

2 OPTIONS FOR FIXING THE BRACKET TO CASE  
( RIGHT - LEFT )

**YA-255 D**

PG - 7

**YA-255 D 1**

PG - 9



Polyamid Coupler - IP 68



Metal Coupler - IP 68

**YA-255 E**

PG - 7

**YA-255 E 1**

PG - 9



All cutting dimensions and surface coatings can be done according to requirements


mail : [info@ledaks.com](mailto:info@ledaks.com)

119

web : [www.ledaks.com.tr](http://www.ledaks.com.tr)

**YD-004**

Alu. Wall Washer Case (Maxi)

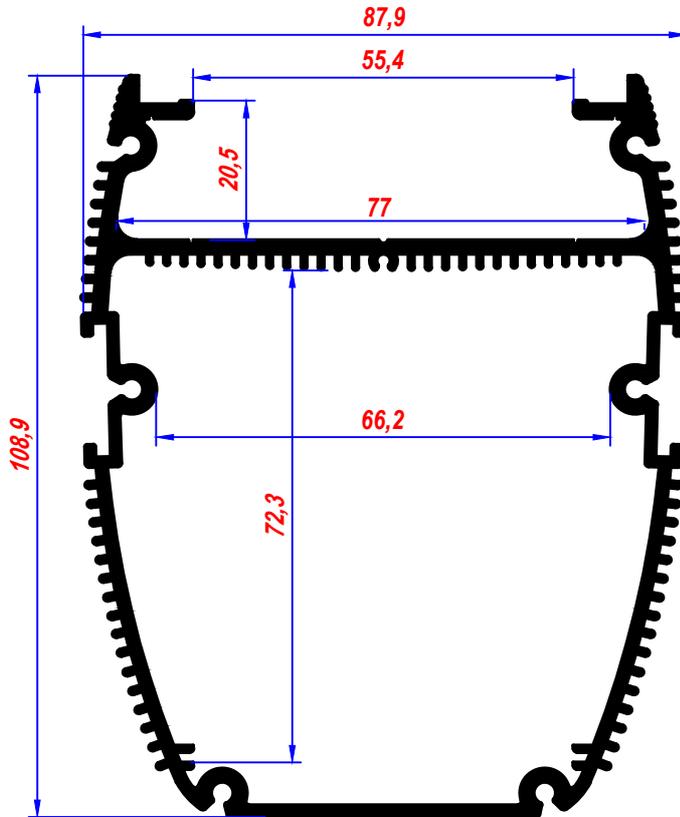

*CASE IS SUITABLE FOR DOUBLE ROW LED*

**YD-004 A**

Plastic End Cap + Gasket  
Glass Reinforced Polyamid

Light Gray



M 4 X 10 IMBUS HEX SOCKET HEAD SCREW

*SUITABLE FOR IP 65*

*LABEL AREA FOR THE COMPANY NAME  
TEMPERED GLASS IN REQUESTED SIZES  
DECORATIVE GLASS REINFORCED PLASTIC END CAP*

MOUNTING

YD - 004 2 OPTIONS FOR FIXING THE BRACKET TO CASE



2 OPTIONS FOR FIXING THE BRACKET TO CASE  
( RIGHT - LEFT )



- \* *TEMPERED GLASS IN REQUESTED SIZES*
- \* *BRACKET SET SUITABLE FOR CASE; YA-253 D1*
- \* *BRACKET SET WITH SINGLE-DOUBLE SCREW IN DIFFERENT SIZES*
- \* *PCB DESIGNED,*
- \* *PCB PRODUCED,*
- \* *LED STRING,*
- can be done according to customer requirements*

**YA-255 D**

**YA-255 D 1**

**YA-255 E**


**YA-255 E 1**

PG - 7 PG - 9  
Polyamid Coupler - IP 68

PG - 7 PG - 9  
Metal Coupler - IP 68

*All cutting dimensions and surface coatings can be done according to requirements*

ALUMINUM EXTRUSION WALL WASHER - STREET FIXTURES  
POLICARBON DIFFUSER

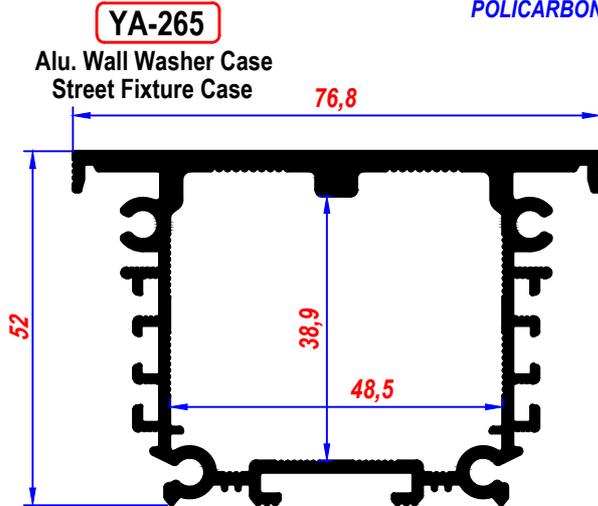

IP 66, STREET FIXTURE- WALL WASHER CASE

PROVIDED IP 66 , PC ENJECTION DIFFUSER, NEW ECONOMIC WALL WASHER AND STREET FIXTURE CASE

YA-265 P


Enj. PC.Diffuser+Gasket



W=75 mm-L=350 mm-H=22 mm  
Area of PCB ; 50 mm x 315 mm

YA-265 P

PC.Diffuser Frame

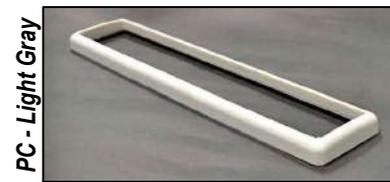

PC - Light Gray

Optional

YA-265 W Alu. Wall Washer Set



YA-265 W

YA-265 W-60 watt

YA-253 A  
YA-253 B

PC DIFFUSER; 35 CM

YA-265 S Street Lighting Fixtures



YA-265 S

YA-265 S-60 Watt

PCB Area:50x315 mm

YA-253 A YA-253 B

Mini Bracket Set  
Single Screw



Height: YA-253 A 75 mm

Height: YA-253 B 37 mm

Stainless Steel  
Thickness; 1,2 & 1,5 mm

MULTIPLE APPLICABLE WITH SIDE BY SIDE

3 Options for fixing the bracket to case  
Suitable for double row led application  
Decorative street fixture for park, site areas etc.  
Larger area for driver

YA-265 T


Pls. End Cap + Gasket



Double Set - Light Gray

YA-265 UT


Metal Jointed Pole

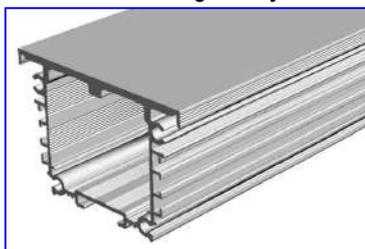

ALU. PRF. 610 CM


All cutting dimensions, drillings and surface coatings can be done according to requirements

MOUNTING FROM 3 DIFFERENT PARTS  
OF THE PROFILE TO WALL-CEILING

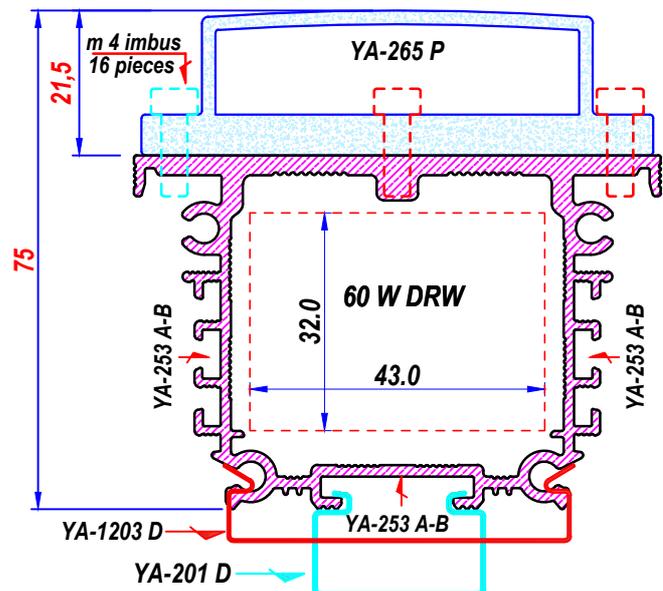

**YA-266 EKO**

Alu. Wall Washer Case

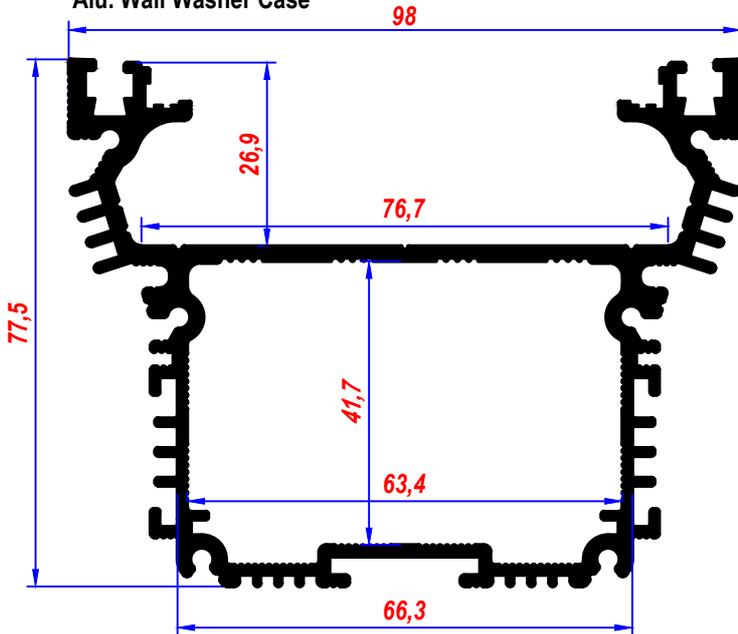

- *More economic than similar,*
- *New Silicone Seal*
- *3 options applying bracket to case*
- *Suitable for double row led app.*
- *Larger area for driver*
- *Decorative-Slim Street Fixture*

**YA-266 S** WW Case Street Fixtures as a Set



Double Set - Light Gray

**YA-266 A**

Alu. Glazing Molding Prf.



**YA-266 F**

Silicone Rubber



**YA-255 PV**

Polyamid

**YA-255 MV**

Metal

Vent Nipple



Suitable for WW - Projector

**YA-266 M**

Metal Jointed Pole



3 mm HRP galvanise

E-static Painting Light Gray



**YA-266 B 1**

Plastic End Cap + Gasket

Light Gray




Using with glazing molding profile

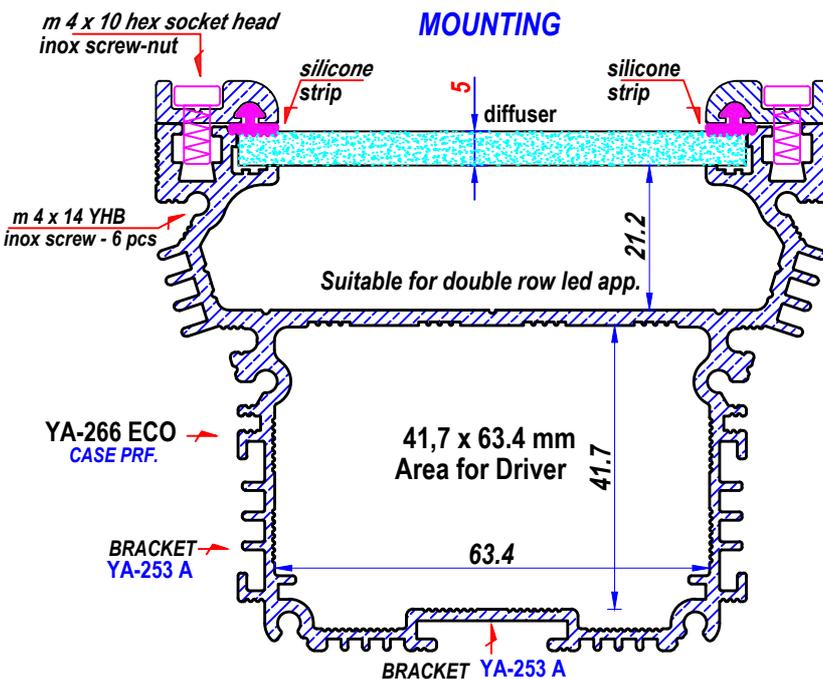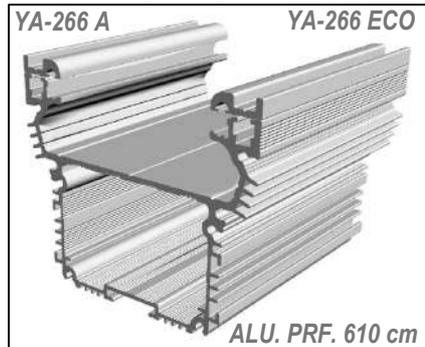


All cutting dimensions and surface coatings can be done according to requirements

ALU. ENJECTION STREET FIXTURES

**YA-314** Street Light Case (Enj.)

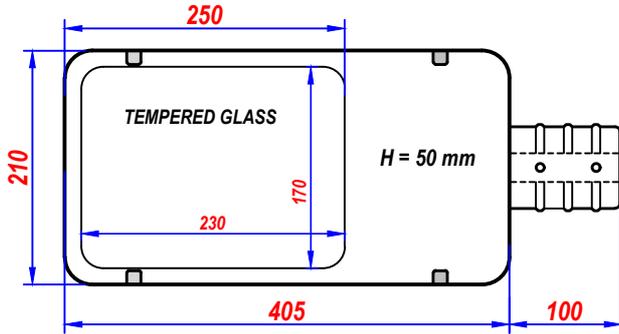


100 - 120 W

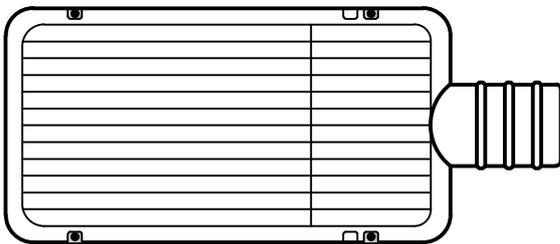

IP 66 PCB Area : 170 x 230 mm


IP 66

CASE COLOR : GRAY-BLACK

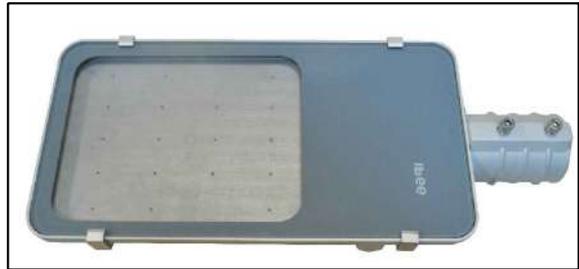

DRIVER AREA; 45,5 x 100 x 175 mm


IP 66

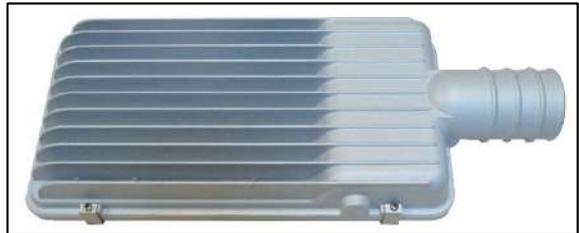


- \* PCB DESIGNED,
- \* PCB PRODUCED,
- \* LED STRING, can be done according to requirements

ALU. ENJECTION FLOOD LIGHT CASE

**YA-314 A** Alu. Flood Light Case(Enj.)

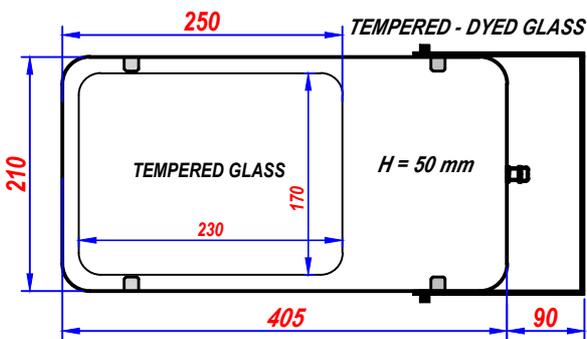

100 - 120 W

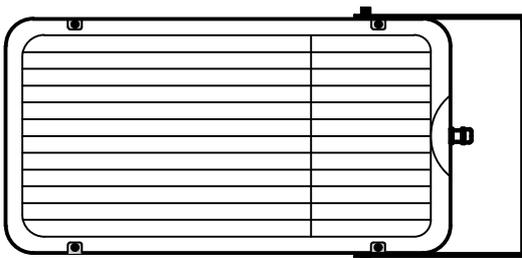

IP 66 PCB Area : 170 x 230 mm

100 W

CASE COLOR : GRAY-BLACK



DRIVER AREA; 45,5 x 100 x 175 mm



All cutting dimensions and surface coatings can be done according to requirements


**YA-321**

Led Canopy Light  
100-150 W CANOPY

**LED CANOPY CASE**

High Cooling is provided


E.static painted - 1.5 mm plate

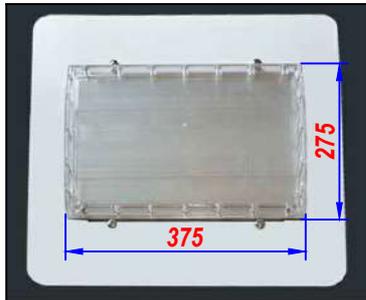


IP 67- PC. Enj. Diffuser



Aluminum Extrusion Heatsink Profile

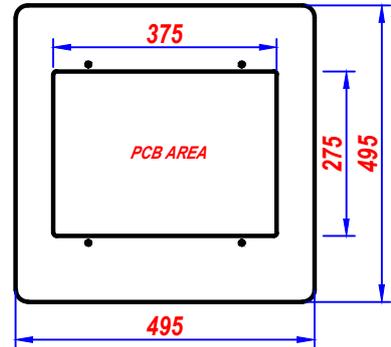

ADS-300 A

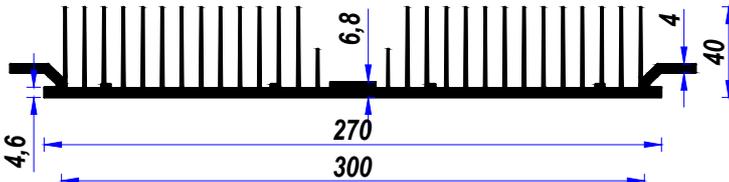



Aluminum extrusion profile with high cooling capacity used in the canopy case

YA-1311 A



DIF ; 270 x 370 mm



**YA-315** Street Light Case (Enj.)

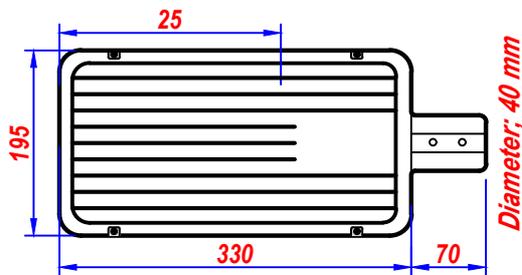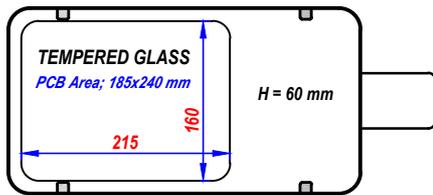

IP 66 - 50 W



**YA-315 A** Alu. Flood Light Case(Enj.)

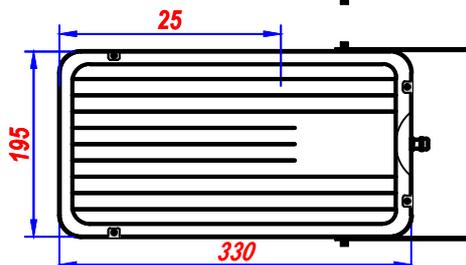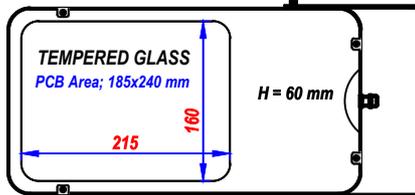

IP 66 - 50 W




All cutting dimensions and surface coatings can be done according to requirements

ALUMINUM EXTRUSION PROJECTOR - STREET LIGHTING FIXTURE

POLICARBON DIFFUSER

**YA-1310**

Alu.Led Prj.Case  
PC. Enj.Diffuser  
50-75 Watt  
PCB Area:140x235 mm

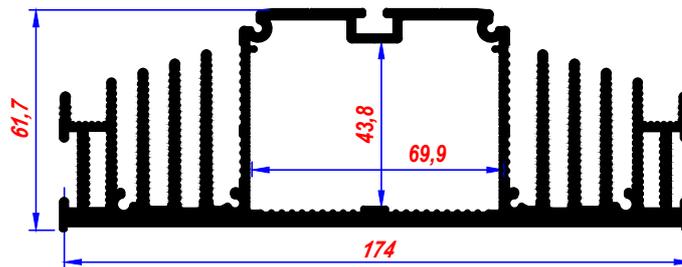

**YA-1310 P**

Projector Lighting Set  
IP 66, 50-75 Watt

**YA-1310 S**

Street Fixture Lighting Set  
PCB Area:140x235 mm

**YA-1310 P**

Projector Case as a Set



IP 66 - 50-75 Watt

PC. Enj.Diffuser

Width;174 mm Lenght;280 mm

**YA-1310 A**

PC. Enj. Diffuser+Gasket (silicone)



Transparent

DIF ; 170 x 270 mm

- \* IP 66 Protected, New economic, PROJECTOR and STREET Fixtures
- \* Fast and easy assembly
- \* Large Driver Area ; 43,8 x 69,9 mm
- \* Pcb Area ; 140 x 235 mm
- \* End Cap, Mounting Bracket HRP, can be light gray or e.static powder coating. Stainless Steel end cap can be done
- \* Silicone rubber sealing with end cap
- \* Gasket and 6 mm acorn nut application with End cap to provide watertight, IP 66
- \* Suitable for applying 2 or 3 rows of glass side by side; 50 + 50 = 100 watt
- \* U - bracket, metal end cap, gasket, inox screws and IP 68 PG 7 metal coupler is given with the projector
- \* YA-1311 Alu. Prf. Case suitable for vertical binary application
- \* Suitable for Tunnel Lighting
- \* Aluminium Profile Length; 400 cm.

**YA-1310 S**

Street Fixture Lighting Set



IP 66 - 50-75 Watt

Width;174 mm Lenght;280 mm

**YA-1310 B**

Metal End Cap



Used with Projector

2,5 mm STAINLESS SHEET

**YA-1320 U**

Metal U-Bracket



Standard Width;32 cm

3 mm HRP Sheet-E.Static Painting

**YA-1320 L**


Metal L-Bracket



Height: 120 mm

**YA-1310 C**

End Cap Gasket

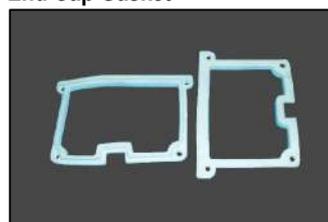

Elastron Gasket

**YA-1310 M**

Metal Jointed Pole



Double Set - Light Gray

3 mm HRP Sheet-E.static Painting

**YA-1310 Y2**

Horizontal Binary Projector



W:174 mm-L:560 mm


Profile ; YA-1310

PC DIF. YA-1310 A

YA-1310 suitable for horizontal binary app.

**YA-1310 T**

Metal End Cap

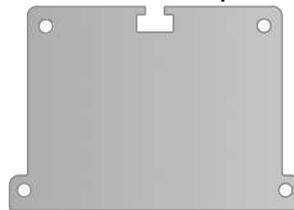

2,5 mm STAINLESS STEEL  
Used with Street Fixtures

**YA-1310 D2**

Vertical Binary Projector



Profile ; YA-1311

PC DIF. YA-1310 A

W:274 mm L:350 mm

YA-1311 suitable for vertical binary app.


All cutting dimensions and surface coatings can be done according to requirements

ALUMINUM EXTRUSION PROJECTOR - STREET LIGHTING FIXTURE

POLICARBON DIFFUSER

YA-1311

Alu.Led Prj.Case  
PC. Enj.Diffuser  
100 watt  
Pcb Area:240x340 mm

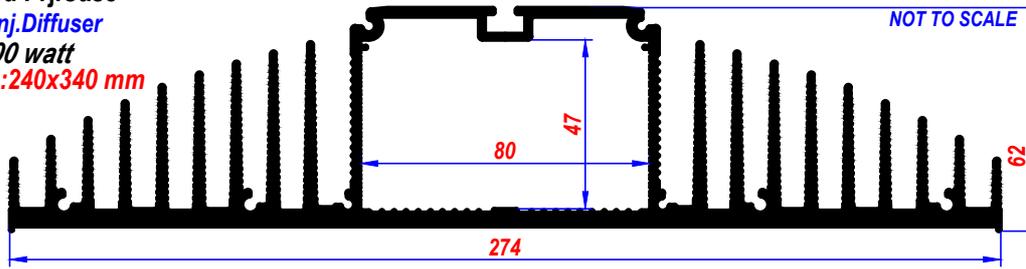

YA-1311 S

Street Fixture Case  
PC. Enj.Diffuser  
IP 66 - 100 watt

YA-1320 S

Street Fixture  
Lighting Set

YA-1311 P

Projector Case as a Set

Area of PCB : 240x340 mm



W:274 mm - L:380 mm

- \* IP 66 Protected, New economic, PROJECTOR and STREET Fixtures
- \* Fast and easy assembly
- \* Higher cooling capacity than similars
- \* Large Driver Area; 47 x 80 mm
- \* Pcb Area ; 240 x 340 mm
- \* Gasket and 6 mm acorn nut application with End cap to provide watertight, IP 66
- \* Suitable for applying 2 or 3 rows of glass side by side; 100 + 100 = 200 watt
- \* U - L bracket, metal end cap, gasket, inox screws and IP 68 PG 9 metal coupler is given with the projector
- \* Suitable for Tunnel lighting
- \* Aluminium Profile Length; 400 cm.

YA-1311 S

Street Fixture Lighting



W:274 mm - L:380 mm

Area of PCB : 240x340 mm

YA-1311 A

P.C. Enj. Diffuser + Gasket



DIF ; 270 x 370 mm

YA-1311 B

Metal End Cap



2,5 mm STAINLESS SHEET

Used with Projector

YA-1311 U

Metal U-Bracket



Standard Width; 32 cm

3 mm HRP Sheet-E.Static Painting

YA-1311 L


Metal L-Bracket



Height: 175 mm

YA-1311 C

End Cap Gasket

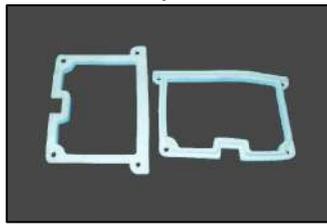

Elastron Gasket

YA-1311 M

Metal Jointed Pole



3 mm HRP Sheet-E.Static Painting

Double Set - Light Gray

YA-1311 Y2

Horizontal Binary Projector



W:274 mm-L:780 mm


PC DIF. 1311 P

Diffuser: YA-1311 P

YA-1311 suitable for horizontal binary app.

YA-1311 T

Metal End Cap

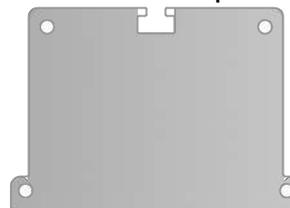

2,5 mm STAINLESS STEEL  
Used with Street Fixtures

All cutting dimensions and surface coatings can be done according to requirements

ALUMINUM EXTRUSION PROJECTOR - STREET LIGHTING FIXTURE

**YA-1320**  
Alu.Led Prj.Case  
PC. Enj.Diffuser  
75-100 Watt  
Pcb Area:140x235 mm

IP 66 - 75-100 Watt

**YA-1320 P**

Projector Case as a Set



W:175,5 mm - L:280 mm

**YA-1310 A**

PC. Enj. Diffuser+Gasket



DIF ; 170 x 270 mm

**YA-1320 U**

Metal U-Bracket



Standard Width:32 cm

3 mm HRP Sheet-E.Static Painting

**YA-1320 L**

Metal L-Bracket



Height: 120 mm

**YA-1320 P2**

Horizontal Binary Projector




W:175,5 mm-L:580 mm

YA-1320 L PC. DIF. YA-1310 A

IP 66 - 150-200 Watt

YA-1320 P2 - DOUBLE SET

All cutting dimensions, drillings and surface coatings can be done according to requirements

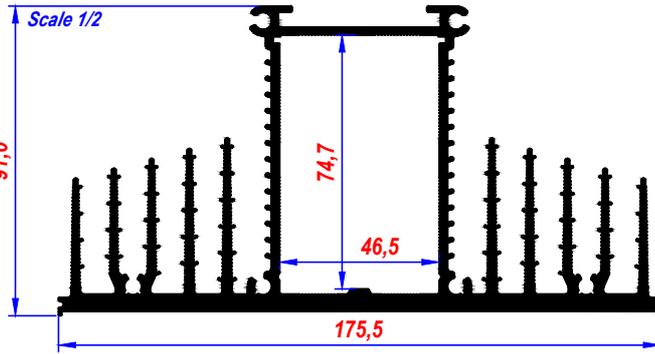

**YA-1320 P**

Projector Set

IP 66, 75-100 Watt

**YA-1320 S**

Street Fixture

Lighting Set

Pcb Area:140x235 mm

Street Fixture Lighting **YA-1320 S**



IP 66 - 75-100 Watt

W:175,5 mm - L:280 mm

**YA-1320 T**

Pls.End Cap



Reinforced Plastic - Light Gray

YA-1320 P



**YA-1320 C**

End Cap Gasket



Elastron Gasket

**YA-1320 M**

Metal Jointed Pole



Double Set - Light Gray

3 mm HRP Sheet-E.Static Painting

HIGH COOLING CAPACITY  
YA-1320 PROJECTOR - STREET FIXTURE CASE



YA-1320 ALU.CASE

ALUMINIUM EXTRUSION PROJECTOR - STREET LIGHTING FIXTURE


YA-1321

Alm.Led Prj.Case

PC. Enj.Diffüzör

IP 66 100-150 Watt

Pcb Area;240x340 mm

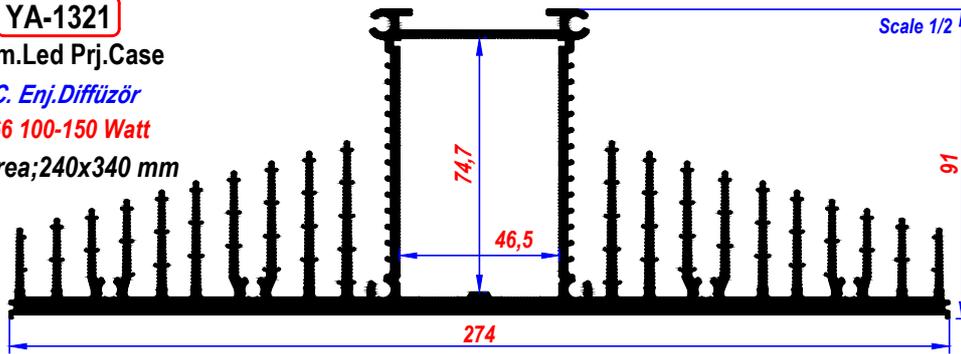

YA-1321 P

Projector Set

IP 66 100-150 Watt

YA-1321 S

Street Fixture Set  
Lighting

Pcb Area;240x340 mm

YA-1321 P2

Horizontal Binary Projector

YA-1321 P

Projector Case-Set



W:274 mm - L:380 mm

- \* IP 66 Protected, New economic, PROJECTOR and STREET Fixtures
- \* Fast and easy assembly
- \* Higher cooling capacity than similars
- \* Large Driver Area; 46,5 x 74,7 mm
- \* Pcb Area; 240 x 340 mm

W:274 mm - L:780 mm



IP 66 - 250-300 Watt

YA-1311 P PC Dif. is two pieces of horizontal glass application

YA-1311 A

PC. Enj. Diffuser+Gasket



DIF ; 270 x 370 mm

Standard Width;32 cm

- \* Possibility to apply 2 or 3 rows of glass side by side
- \* Aluminium Profile Length; 400 cm.
- \* New reinforced plastic enjection end cap,IP 66
- \* Suitable for Tunnel lighting
- \* U - L bracket, Plastic end cap, gasket, inox screws and IP 68 PG9 metal coupler is given with the projector

YA-1321 S

Street Lighting



Pcb Area:240x340 mm

W:274 mm - L:380 mm

HIGH COOLING CAPACITY

YA-1321 PROJECTOR - STREET FIXTURE CASE

YA-1321 U

Metal U-Bracket



Standard Width;32 cm


YA-1321 L

Metal L-Bracket



Height: 175 mm

3 mm HRP Sheet-E.Static Painting

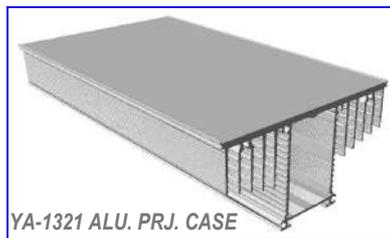

YA-1321 ALU. PRJ. CASE

YA-1320 T

Pls.End Cap



Reinforced Plastic - Light Gray

YA-1321 P2 Projector Double Set



W:274 mm - L:780 mm

IP 66 - 250-300 Watt

DOUBLE L FOOT APPLICATION


YA-1321 P



Set, Back View

YA-1320 C

End Cap Gasket



Elastron Conta-Naturel

YA-1321 M

Metal Jointed Pole



Double Set - Light Gray

3 mm HRP Sheet-E.Static Painting

All cutting dimensions and surface coatings can be done according to requirements

ALUMINUM EXTRUSION PROJECTOR / STREET LIGHT / WALL WASHER CASES

**YA-1300 Y**

Alu.Led Prj.Case  
IP 66 - 75 Watt

**YA-1300 P**


Projector Case as a Set



IP 66 - 50-75 Watts at 30 cm



Lux Bracket Set

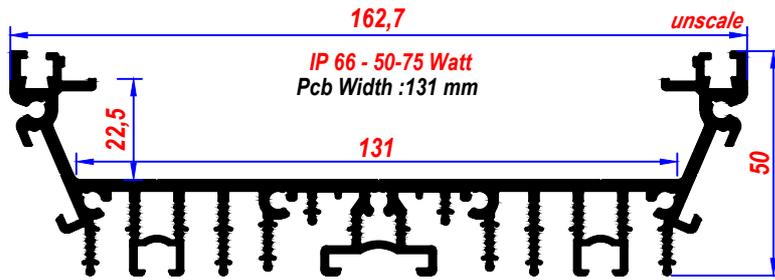

SUITABLE FOR PROJECTOR AND STREET LIGHTING, IP 66 CAN BE MADE,

**YA-1300 S**

Street Lighting



Extrusion Case

IP 66 - 50-75 Watts at 30 cm

**YA-1300 T**

Pls.End Cap




Light Gray

Reinforced End Cap - IP 66

**YA-1300 C**

Gasket

Possibility of hanging from three points to the ceiling as a pendant lighting

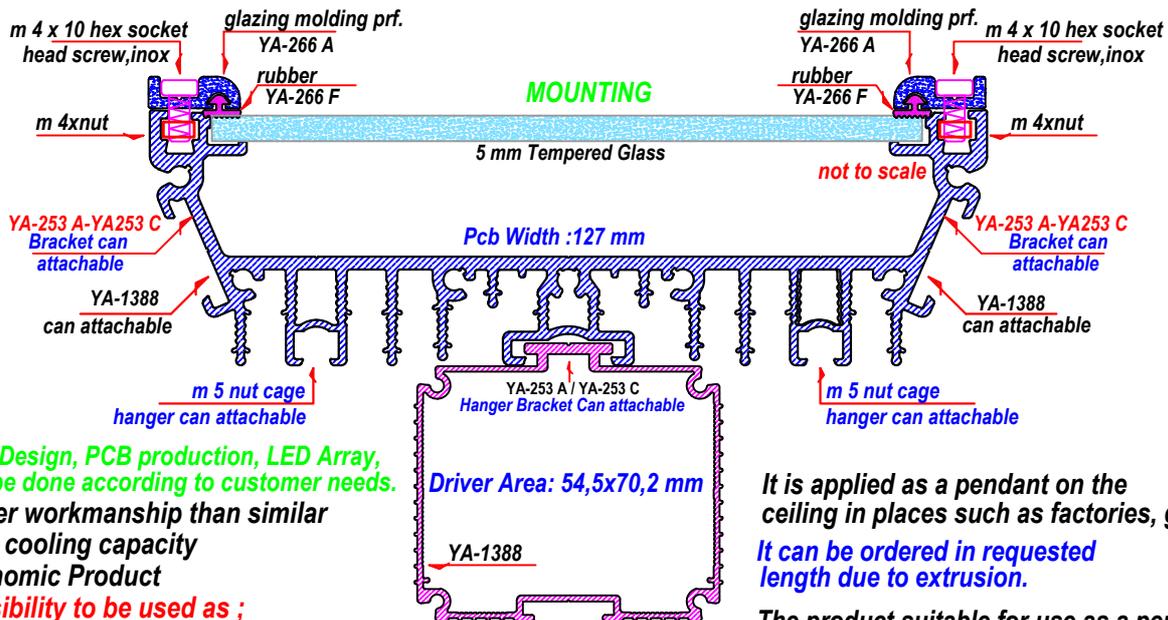

PCB Design, PCB production, LED Array,  
Can be done according to customer needs.  
Easier workmanship than similar  
High cooling capacity  
Economic Product


Possibility to be used as ;  
small Projector or large WallWasher

It is applied as a pendant on the ceiling in places such as factories, gyms.  
It can be ordered in requested length due to extrusion.

The product suitable for use as a pendant on the streets where there is no pole.


**YA-1388**

Alu. Driver Prf.



**YA-1388 A**

Driver End Cap

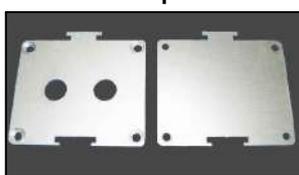

Alu. End Cap + Gasket

**YA-1388 C**

Gasket

**YA-266 C**

Alu.G.Molding Prf.



Silicone Rubber is attached on Glazing Molding Prf.

**YA-266 F**

Silicone Rubber



**YA-1300 U**

Metal U-Bracket



3 mm HRP Sheet-E.Static Painting

**YA-1300 L**

Metal L-Bracket




All cutting dimensions and surface coatings can be done according to requirements

ALUMINIUM EXTRUSION PROJECTOR CASE


MEDIUM

**YA-1301**  
 Alu.Led Prj.Case  
 Medium  
 75 Watt  
 Pcb Area :175 mm

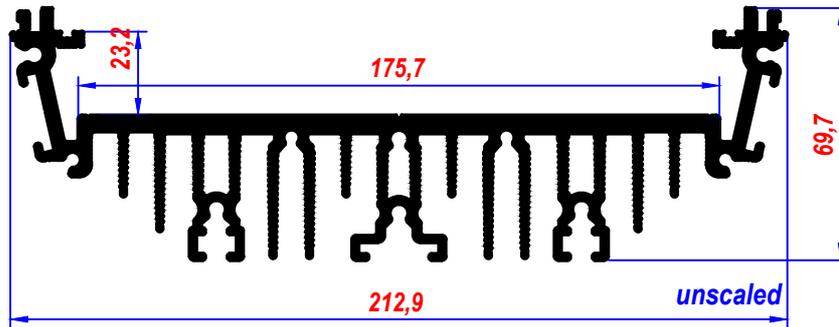

**YA-1301 B**


Metal End Cap

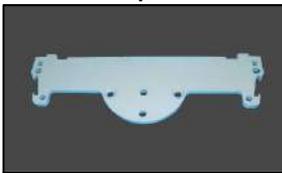

5 mm HRP galvanise-E.static Painting

**YA-1301 C**

Elastron Gasket

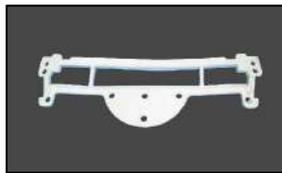

Elastron White Gasket

**YA-1301 U**


Metal U Bracket



standard width is 32 cm


**YA-1300 A**

Alu. Glazing Molding Prf. U - Wick



**YA-1300 F**

U - Wick




Silicone  
Transparent

It can be produced in different sizes.

**YA-1388 A**

Alu. Driver End Cap

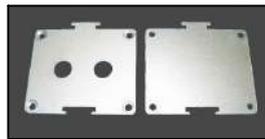

**YA-1388 C**


Elastron Gasket



Elastron Natural Gasket

**YA-1388**


Driver Case

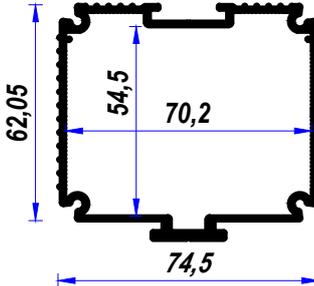


YA - 1301



Pcb Width :175 mm

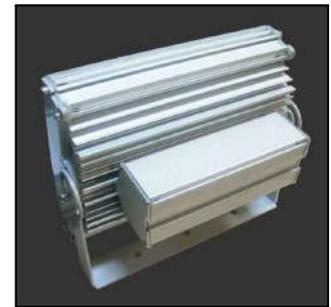

Length; 30 cm , 75 Watt

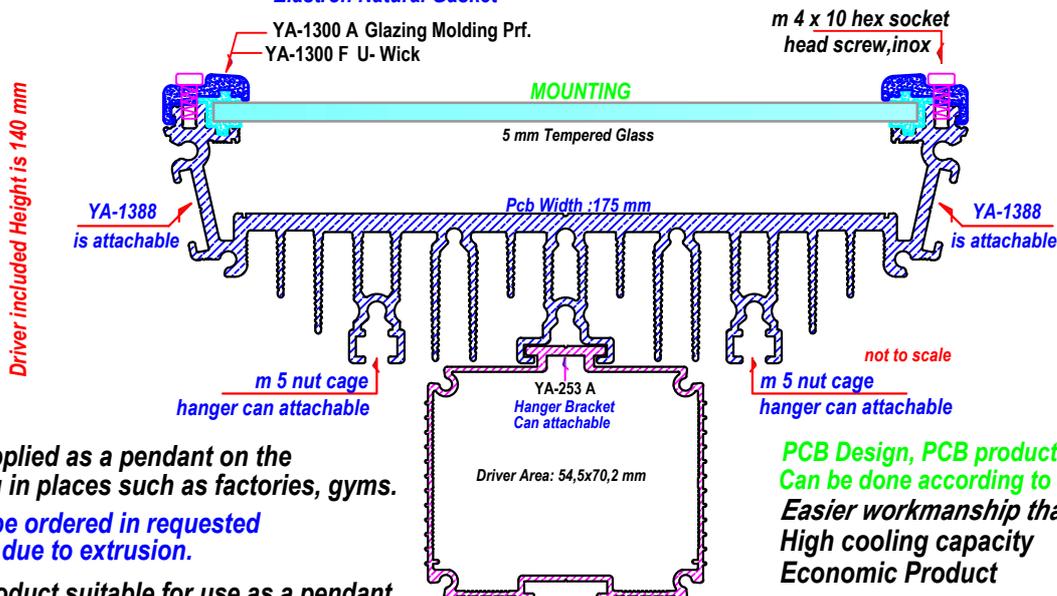

It is applied as a pendant on the ceiling in places such as factories, gyms.

It can be ordered in requested length due to extrusion.

The product suitable for use as a pendant on the streets where there is no pole.


All cutting dimensions and surface coatings can be done according to requirements

PCB Design, PCB production, LED Array,  
 Can be done according to customer needs.  
 Easier workmanship than similar  
 High cooling capacity  
 Economic Product

ALUMINUM EXTRUSION PROJECTOR CASE

**YA-1302**

Alu.Led Prj.Case  
Large  
150-200 Watt  
Pcb Area :265 mm

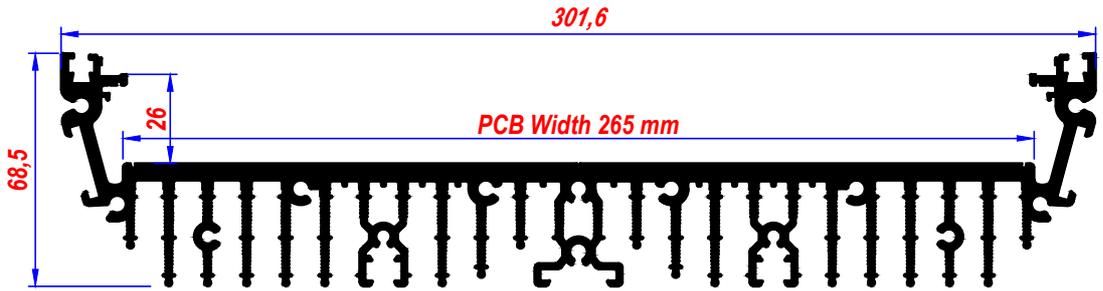


**YA-1302 T**

Metal End Cap

5 mm STAINLESS STEEL



- \* IP 66 protected, new economic, PROJECTOR and STREET Fixtures
- \* Fast and easy assembly
- \* Higher cooling capacity than similars
- \* Large Driver Area ; 54,5 x 70 mm
- \* Width of PCB ; 265 mm
- \* U-L bracket, plastic end cap, gasket, inox screws and IP 68 PG9 metal coupler is given with the projector.

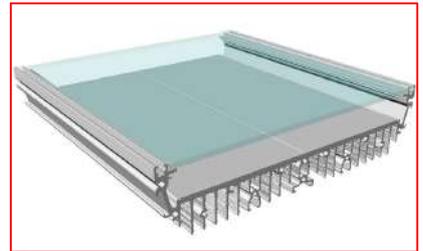

Customized to the required dimensions

**YA-1302 C**

Gasket for End Cap

Self-Adhesive

black

width:20 mm



IP 66

**YA-1302 P**

Projector Case as a Set



Width of Metal U Bracket: 32 cm


32 cm; 150-200 Watt

New Alu. Injection End Cap will be available soon



**YA-1388**

Driver Case

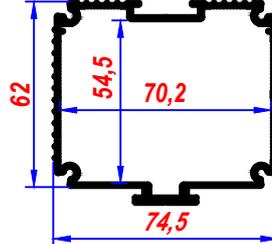

**YA-266 Ç**

Alu.Glazing Molding Prf.

**YA-266 F**



Silicone Rubber

**YA-1302 U**  
Metal U-Bracket

**YA-1302 L**  
Metal L-Bracket

**YA-1388 C**  
Elastron Gasket

**YA-1388 A**  
Alu. Driver End Cap

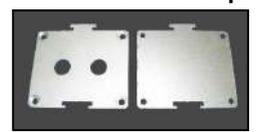

Silicone Rubber is attached on Glazing Molding Prf

Width: 32 cm

3 mm HRP Sheet-E.Static Painting MOUNTING

Glazing Molding Prf.

YA-266 C

U-Wick

YA-266 F

m 4 x 10 hex inox socket

m 4xnut

m 4 x 10 hex inox socket

m 4xnut

Glazing Molding Prf.

YA-266 C

U-Wick

YA-266 F

YA-253 A Bracket is attachable

YA-1388 is attachable

Driver included Height is 137 mm

It is applied as a pendant on the ceiling in places such as factories, gyms.  
It can be ordered in requested length due to extrusion.

The product suitable for use as a pendant on the streets where there is no pole.

m 5 nut cage hanger can attachable

m 5 nut cage hanger can attachable

YA-253 A Bracket is attachable

YA-1388 is attachable




PCB Design, PCB production, LED Array, Can be done according to customer needs.

Easier workmanship than similar  
High cooling capacity  
Economic Product


All cutting dimensions and surface coatings can be done according to requirements

**RK - 004** Advertising Light Box Alu. Prf.

Matte black static painting

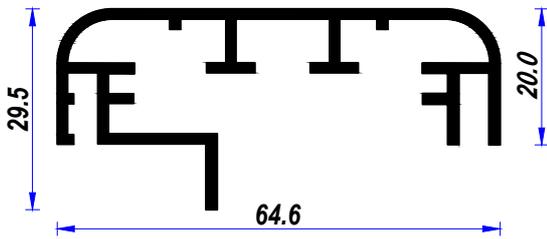

RK - 004

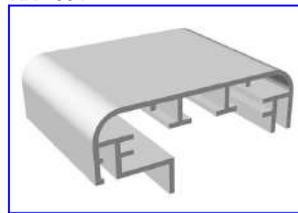

ALU.PRF. 600 cm

**RK-004 A**

Plastic Corner Joint




Black

**RK - 005**


Alu. Advertising Facade Lighting

SCALE: 3/4

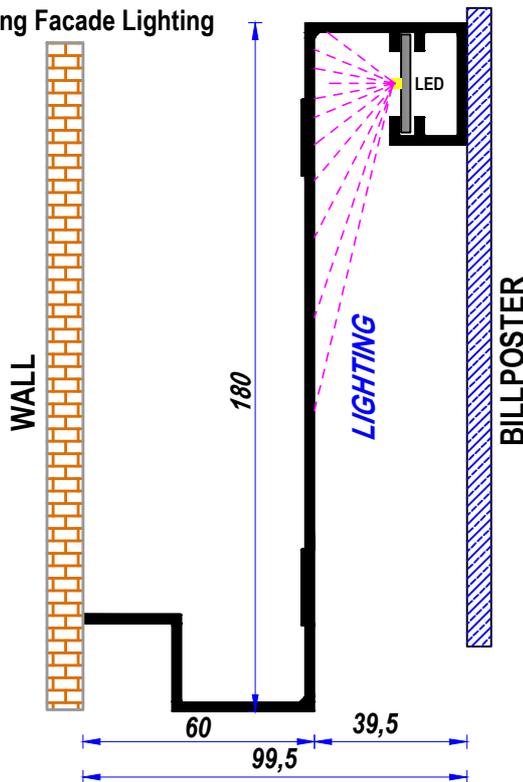



**RK - 005**

ALU.PRF. 600 cm

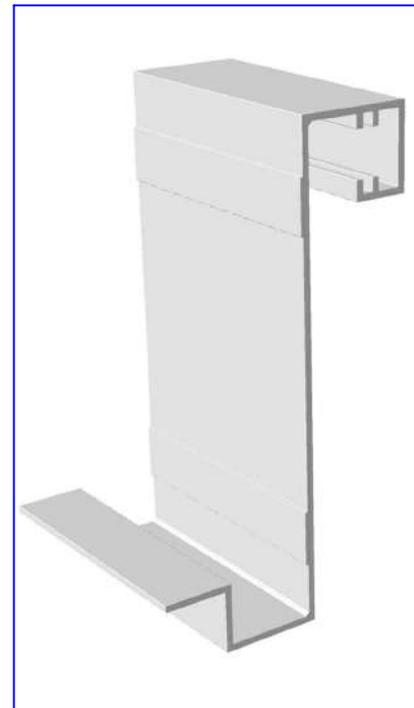


**RK - 001** Alu. Visual Guide Led Prf









**RK - 001A** PC. Diffuser

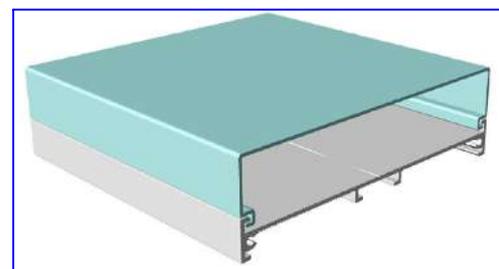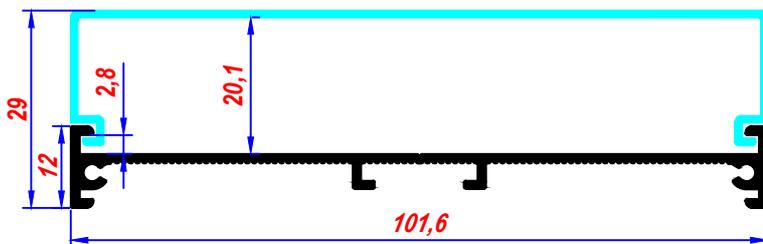

**RK-001 T**  
Alu. End Cap

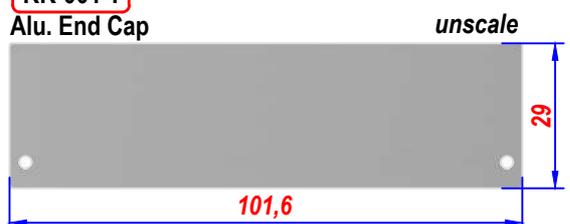


All cutting dimensions and surface coatings can be done according to requirements

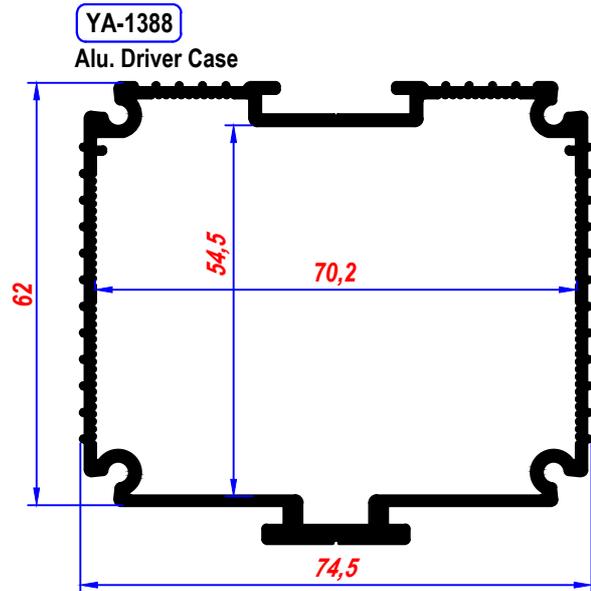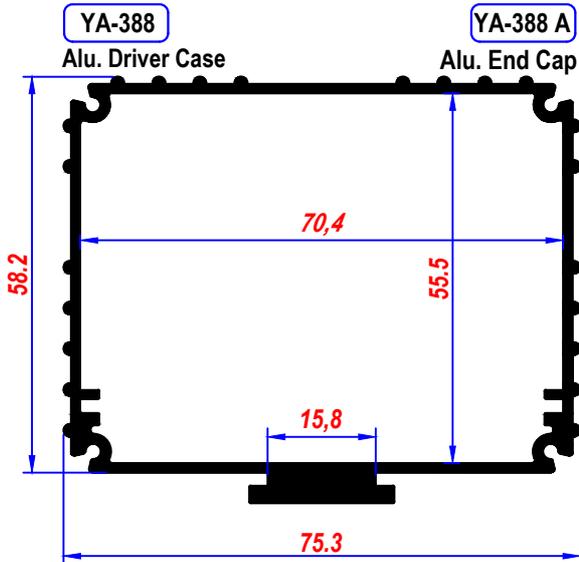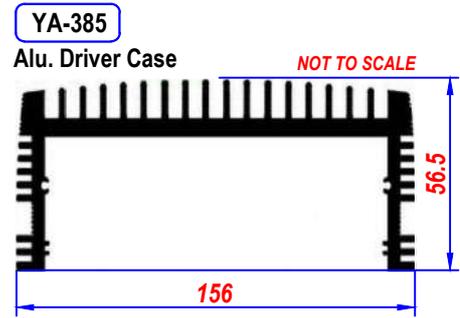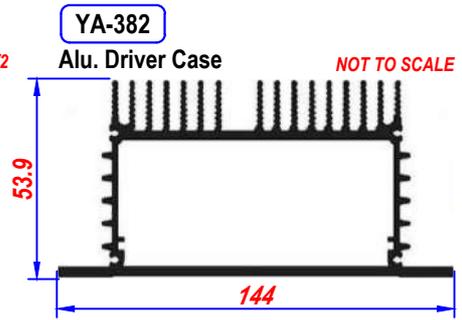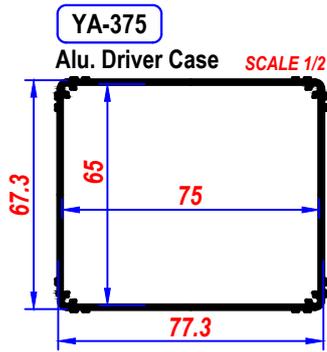


All cutting dimensions and surface coatings can be done according to requirements


**SIGMA PROFILES & ACCESSORIES**

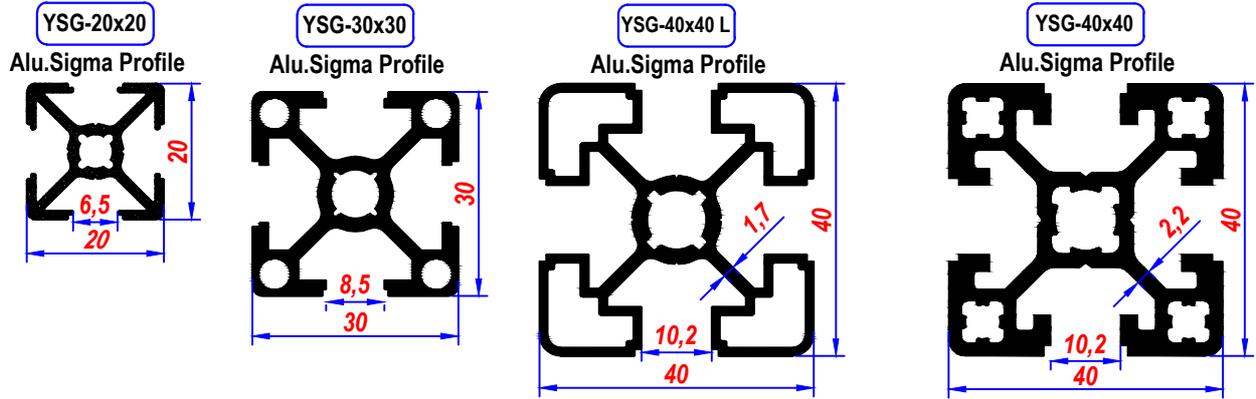

**Get information for profiles and accessories which not in the catalog**

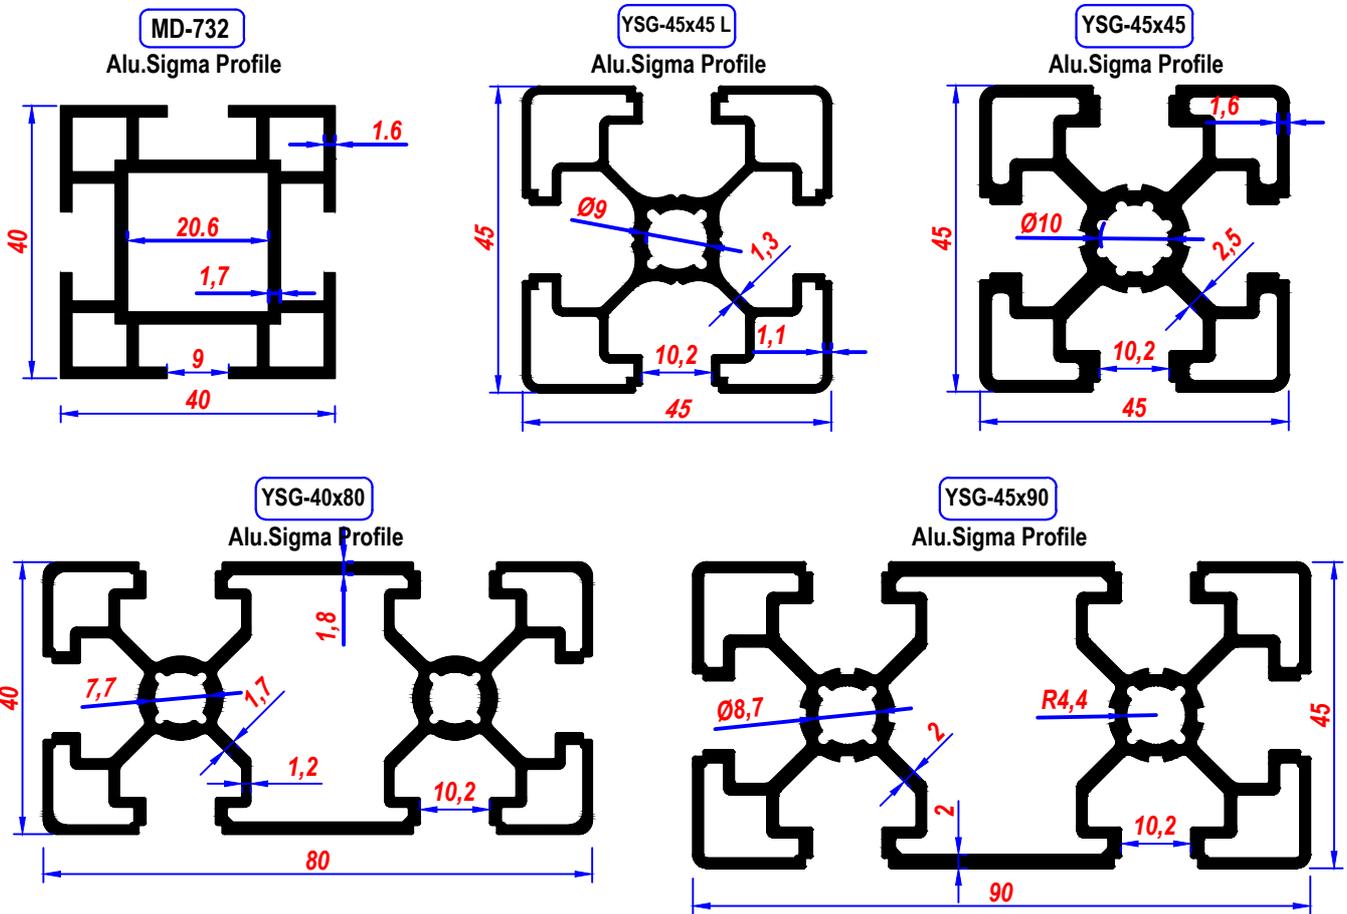


**GET INFORMATION ABOUT SHEET / T / L / U / BOX / PIPE PROFILES AND MEASUREMENTS!**

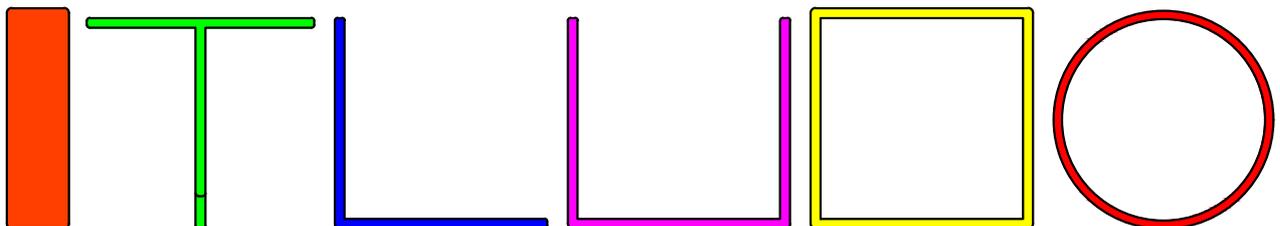

All cutting dimensions and surface coatings can be done according to requirements

**AYDS-75**

75 mm Alu. Heatsink Prf.  
SCALE 1/1

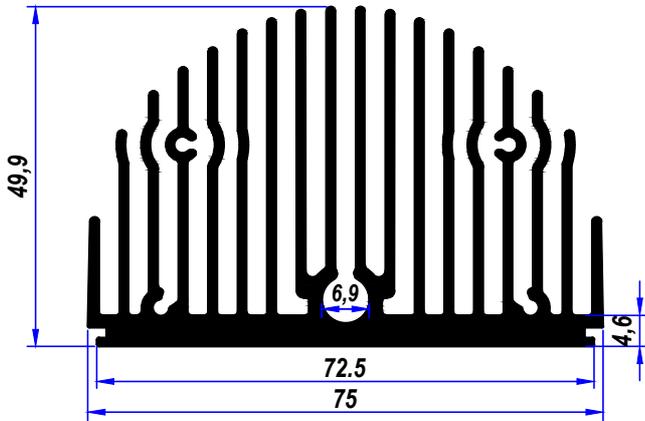

MODULE LENS APPLICATION




METAL END CAP + BRACKET



MODULE LENS + GASKET

**AYDS-93**

93 mm Alu. Heatsink Prf.  
SCALE 1/1

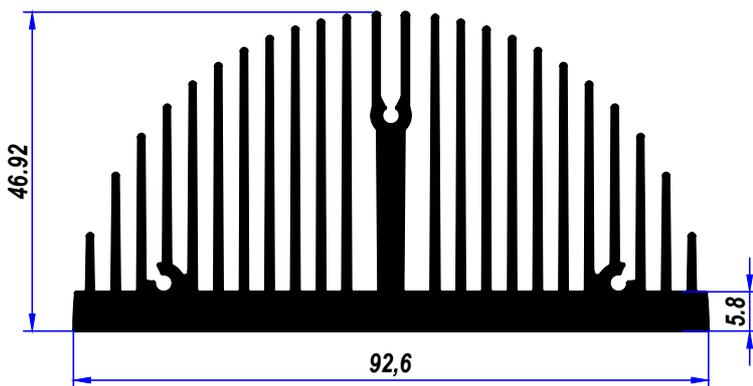


METAL END CAP + BRACKET



YA-265 P  
PC Diffuser  
Gasket

**AYDS-96**

96 mm Alu. Heatsink Prf.  
SCALE 1/1

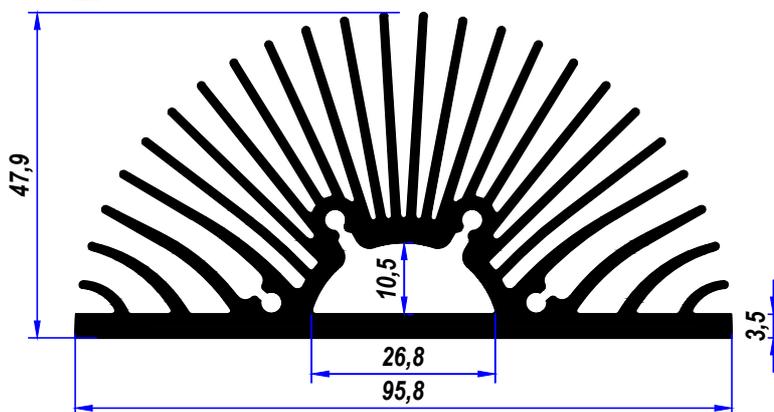

MODULE LENS APPLICATION



METAL END CAP + BRACKET




MODULE LENS + GASKET

Suitable for use as WallWasher, Floodlight and Street Light

All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

**AYDS-96**

96 mm Alu. Heatsink Prof.

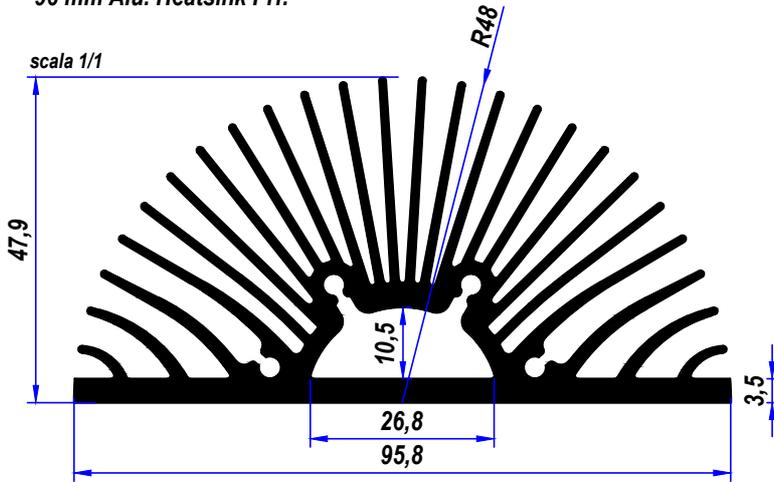

Can be used for Wallwasher, Projector and Street Lighting



METAL END CAP + BRACKET



AYDS-96

MODULE LENS + GASKET


**AYDS-96 TRIPLE USAGE**



Wallwasher module lens application

**MODULE LENS - GASKET**

- LNS - 60° x 173
- LNS - 90° x 173
- LNS - AS. x 173

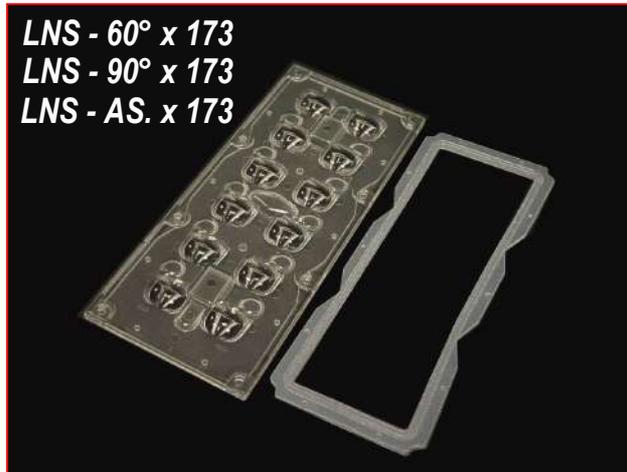


**YA-229 RF**

Plastic Reflector ( Black )

**YA-229 LS**


Lens ( Transparent )

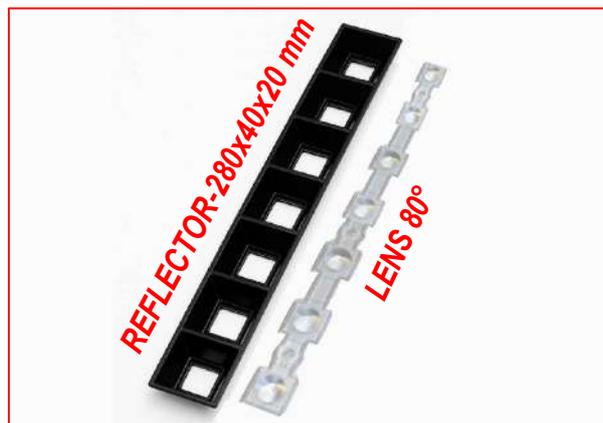

Can put on AYDS-96 profile surface as two rows side by side


**AYS - 25**

Q 25 mm Alu. Heatsink  
SCALE 1/1




**AYS - 30**

Q 30 mm Alu.Heatsink Prf.  
SCALE 1/1




**AYS - 35**

Q 35,6 mm Alu. Heatsink Prf.  
SCALE 1/1




**AYS - 47**

Q 47 mm Alu. Heatsink Prf.  
SCALE 1/1

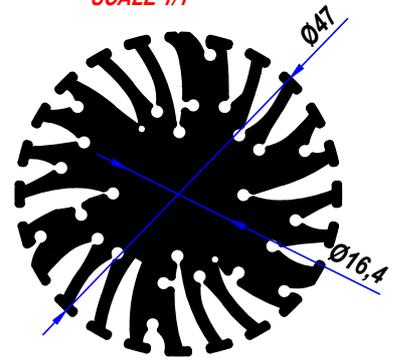


**AYS - 50**

Q 50 mm Alu. Heatsink Prf.  
SCALE 1/1

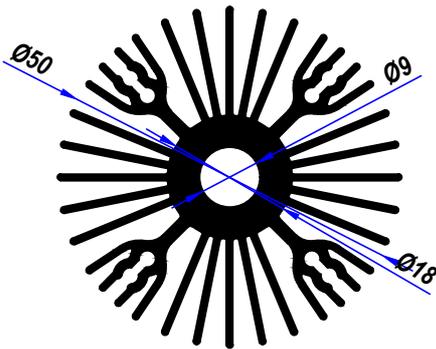


**AYS - 52**

Q 52,5 mm Alu. Heatsink Prf.  
SCALE 1/1

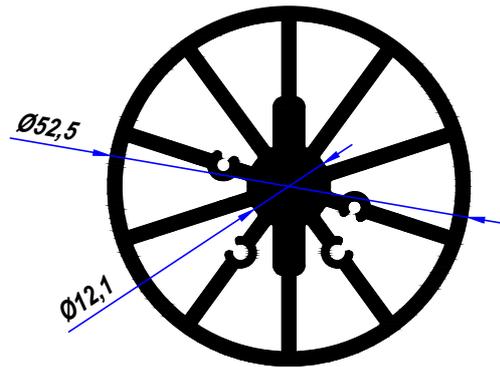


**AYS - 60**

Q 60 mm Alu. Heatsink Prf.  
SCALE 1/1

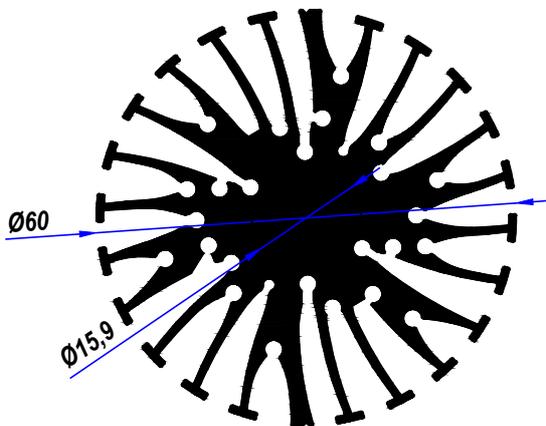

**AYS - 61**

Q 61 mm Alu. Heatsink Prf.  
SCALE 1/1

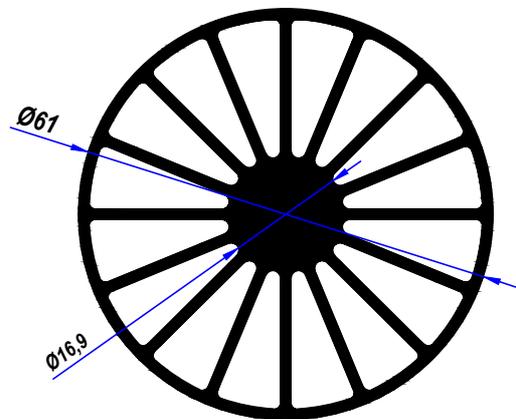


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

**AYS-65 A**

Q 65 mm

Alu. Heatsink Prf.


SCALE 3/4

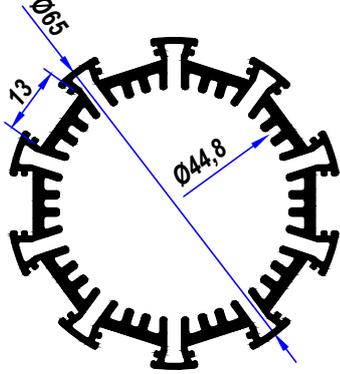

**AVZ-002 P**


PC. Diffuser

APPLICATION 1

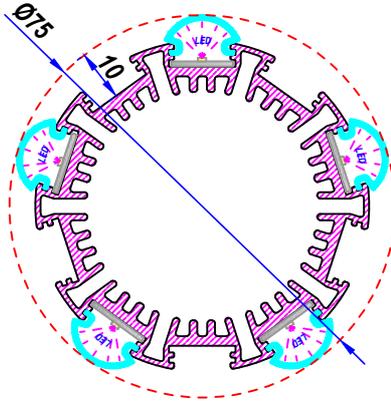

PC. Diffuser-Arcylic minimum 100 mm

APPLICATION 2

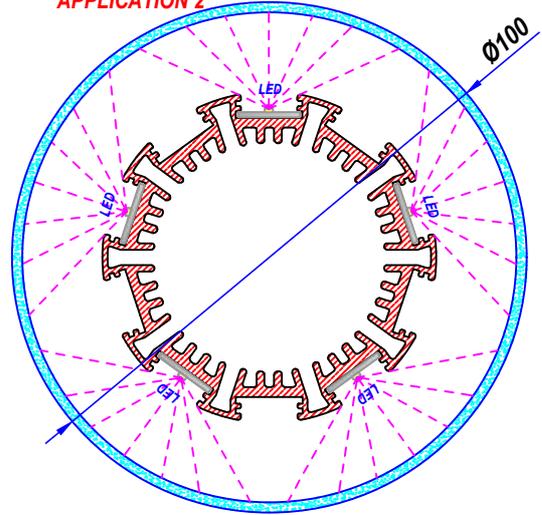


**AYS - 65**

Q 65 mm

Alu. Heatsink Prf.

SCALE 3/4

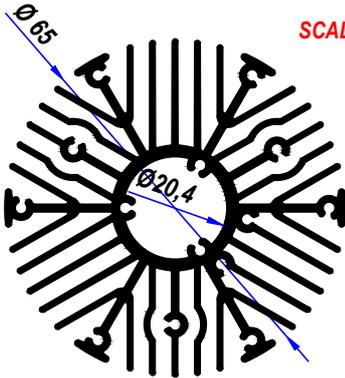


**AYS - 67**

Q 67 mm

Alu. Heatsink Prf.

SCALE 3/4

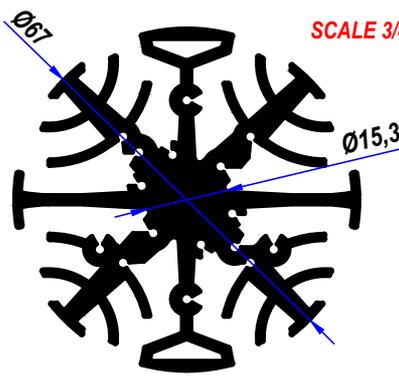


**AYS - 70**

Ø 70 mm

Alu. Heatsink Prf.

SCALE 3/4

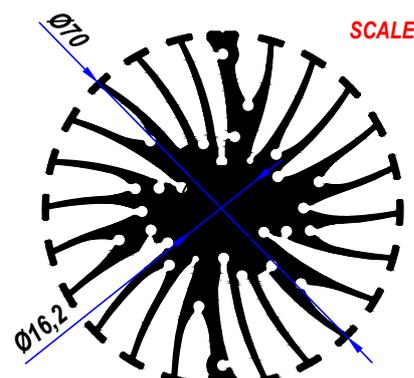


**AYS - 80**

Q 80 mm

Alu. Heatsink Prf.

SCALE 3/4

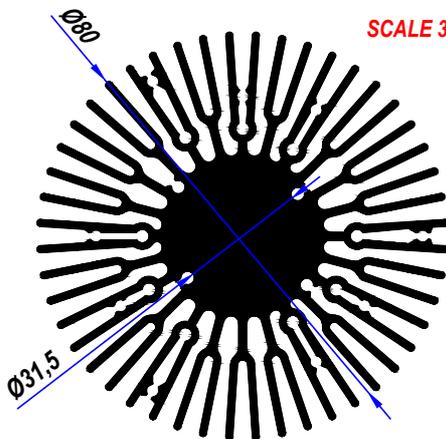


**AYS - 80 A**

Q 80 mm

Alu. Heatsink Prf.

SCALE 3/4

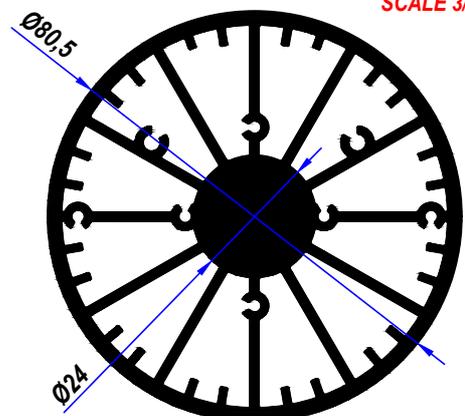


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

**AYS - 86**

Q 86 mm Alu. Heatsink Prf.


SCALE 3/4

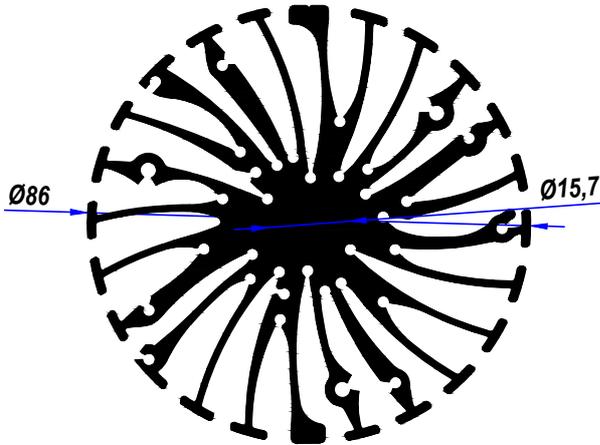

**AYS - 89**

Q 89 mm Alu. Heatsink Prf.


SCALE 3/4

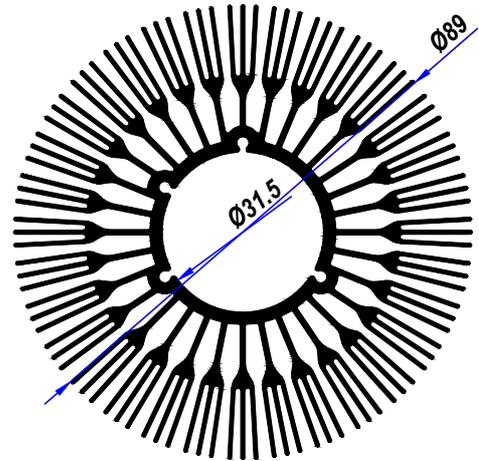

**AYS - 90**

Q 90 mm Alu. Heatsink Prf.

SCALE 3/4

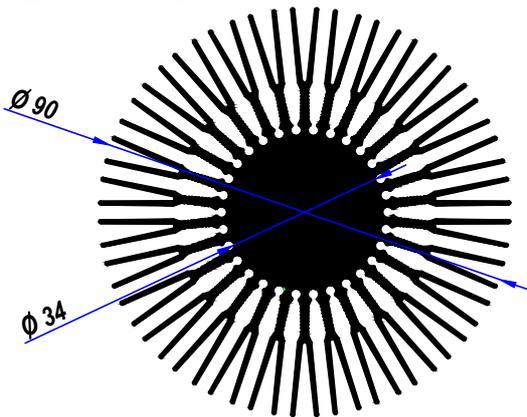


**AYS - 92**

Q 92 mm Alu. Heatsink Prf.

SCALE 3/4


**AVZ-BE 4**  
Spot Hanger Spring

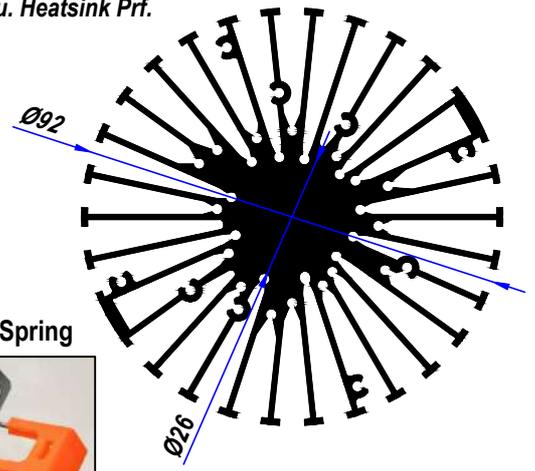

**AYS - 95**

Q 95 mm Alu. Heatsink Prf.


SCALE 3/4

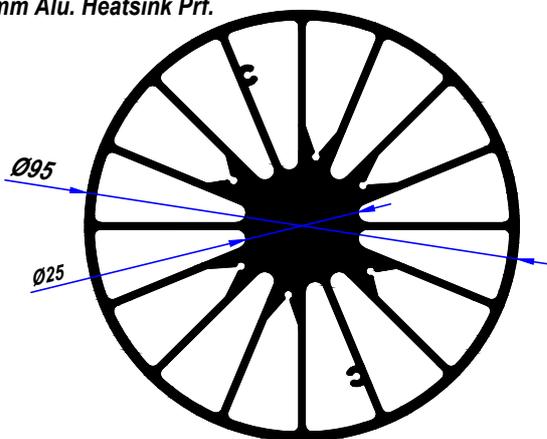

**AYS - 99**

Q 99 mm Alu. Heatsink Prf.

SCALE 3/4

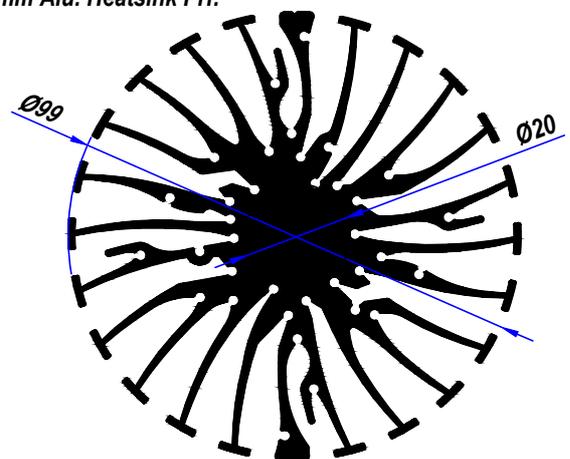


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

AYS - 99 A

Q 99 mm Alu. Heatsink Prf.


SCALE 3/4

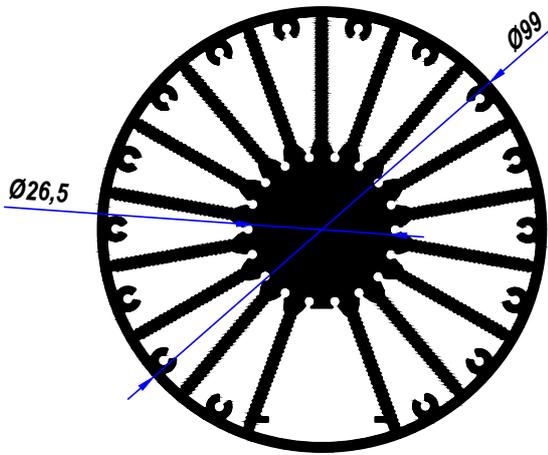

AYS - 100

Q 100,5 mm Alu. Heatsink Prf.


SCALE 3/4

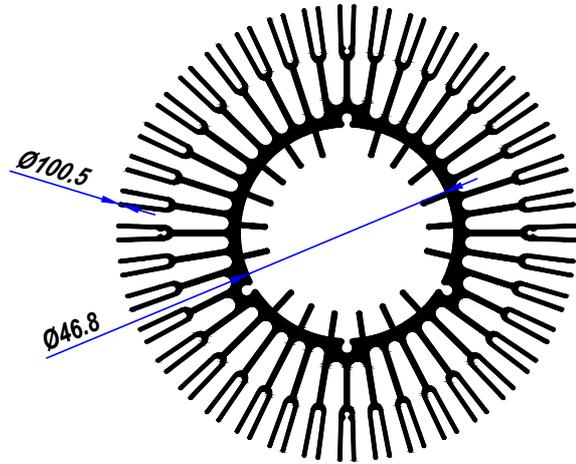

AYS - 105

Q 105 mm Alu. Heatsink Prf.


SCALE 1/2

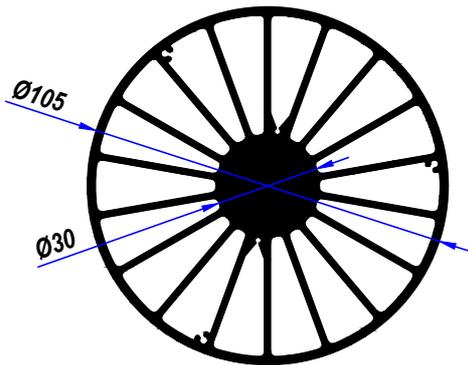

AYS - 110

Q 110 mm Alu. Heatsink Prf.


SCALE 1/2

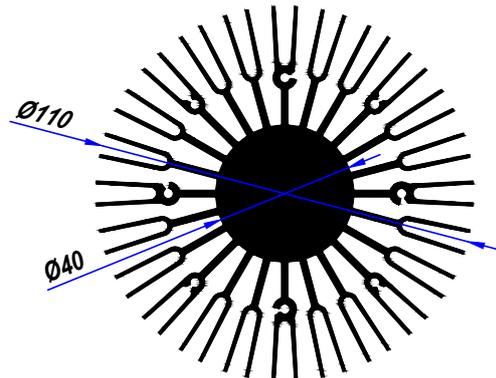

AYS - 115

Q 115 mm Alu. Heatsink Prf.


SCALE 1/2

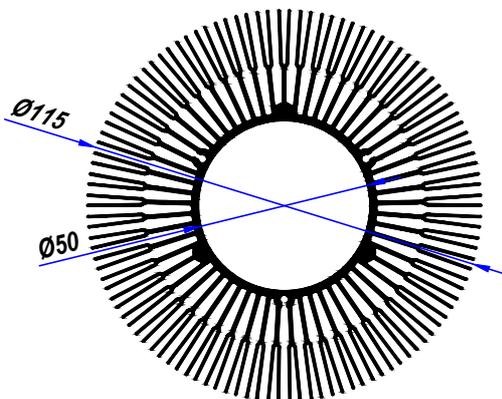

AYS - 120

Q 120 mm Alu. Heatsink Prf.

SCALE 1/2

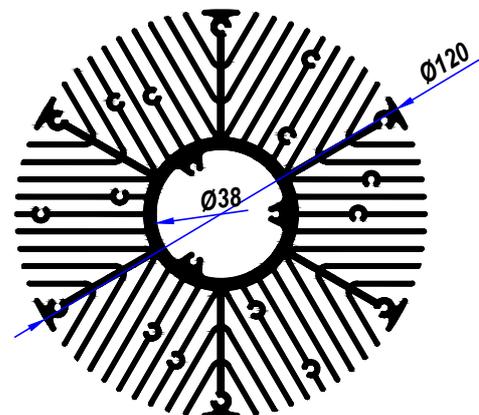


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

**AYS - 121**

Q 121 mm Alu. Heatsink Prf.


SCALE 1/2

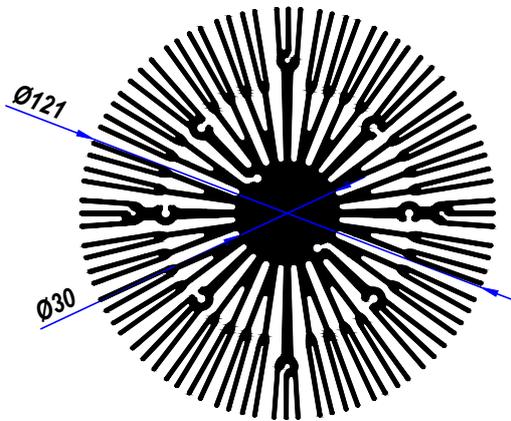

**AYS - 125**

Q 125 mm Alu. Heatsink Prf.



SCALE 1/2

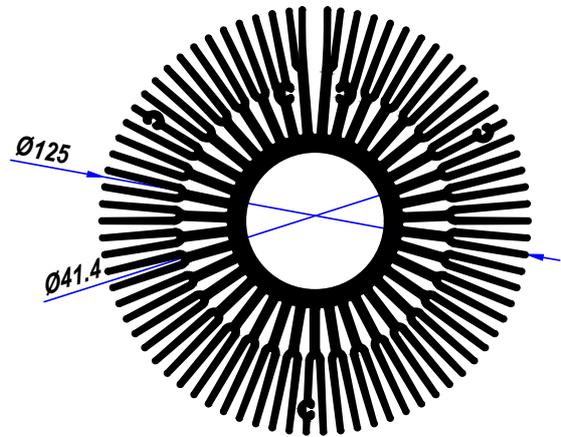

**AYS - 130**

Q 130 mm Alu. Heatsink Prf.



SCALE 1/2

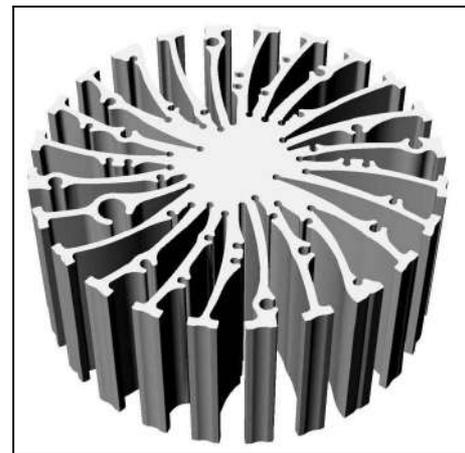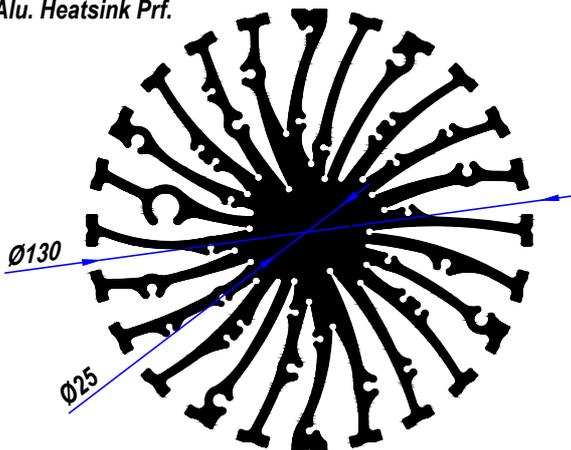

**AYS - 134**

Q 134,6 mm Alu. Heatsink Prf.

SCALE 1/2

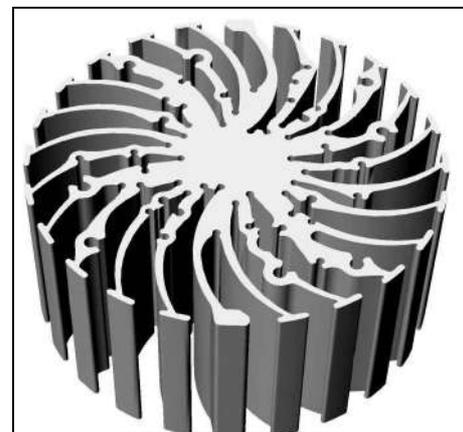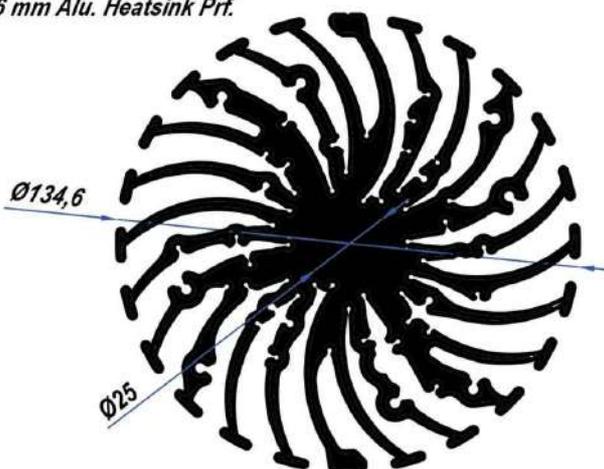


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

**AYS - 138**

SCALE 1/2


Q 138 mm Alu. Heatsink Prf.

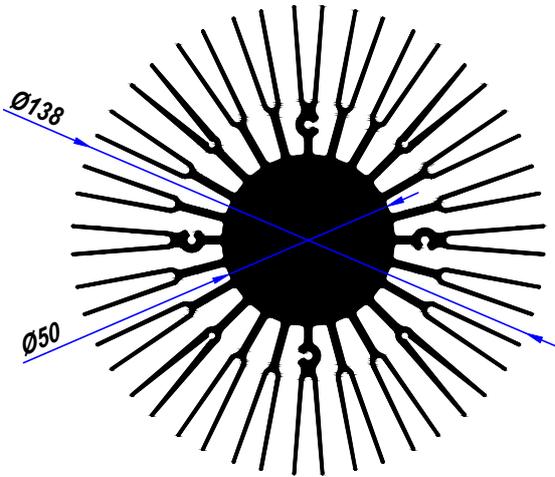

**AYS - 140**

SCALE 1/2


Q 140 mm Alu. Heatsink Prf.

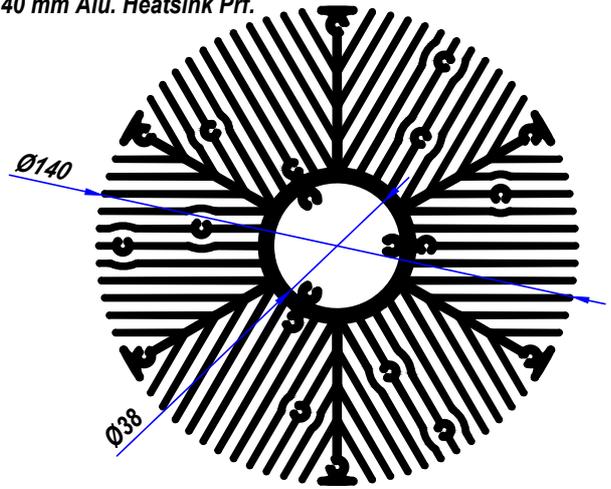

**AYS - 150**

SCALE 1/2


Q 150 mm Alu. Heatsink Prf.

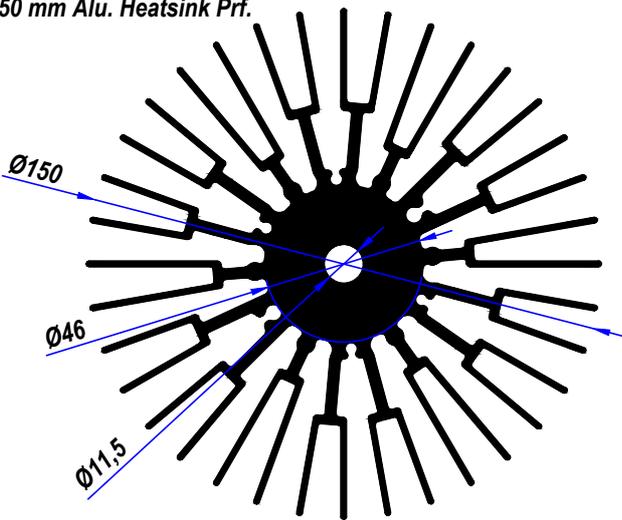

**AYS-150 A**

SCALE 1/2


Q 150 mm Alu. Heatsink Prf.

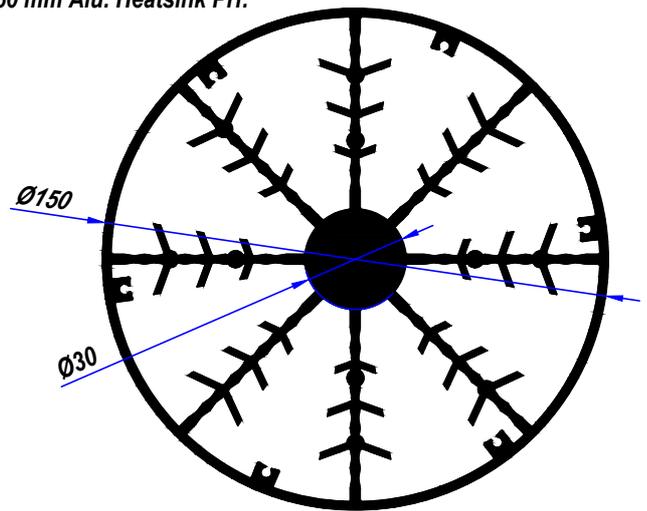

**AYS - 160**

SCALE 1/2


Q 160 mm Alu. Prf.

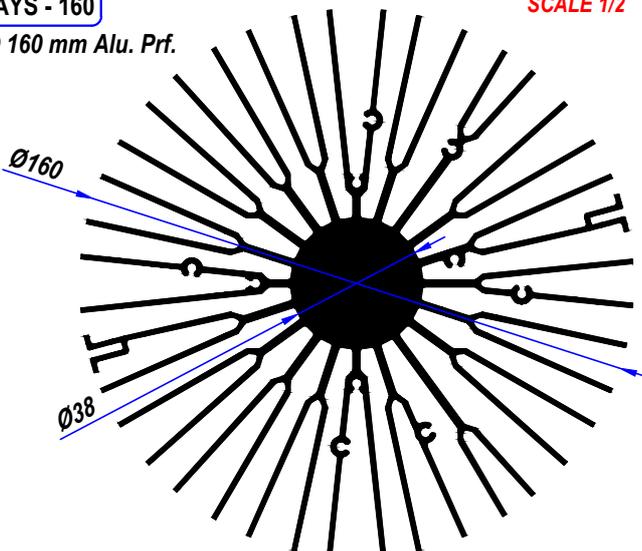


**AYS - 170**

SCALE 1/2



Q 170,2 mm Alu. Prf.

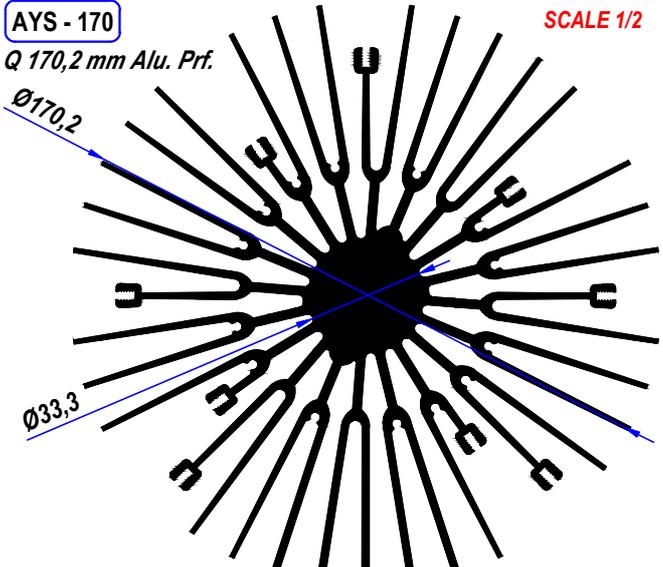



All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

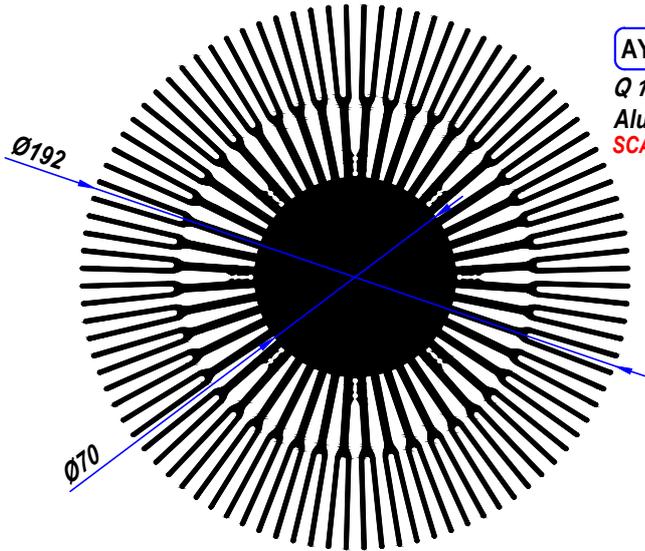


**AYS - 192**  
Q 192 mm  
Alu. Heatsink Prf.  
SCALE 1/3

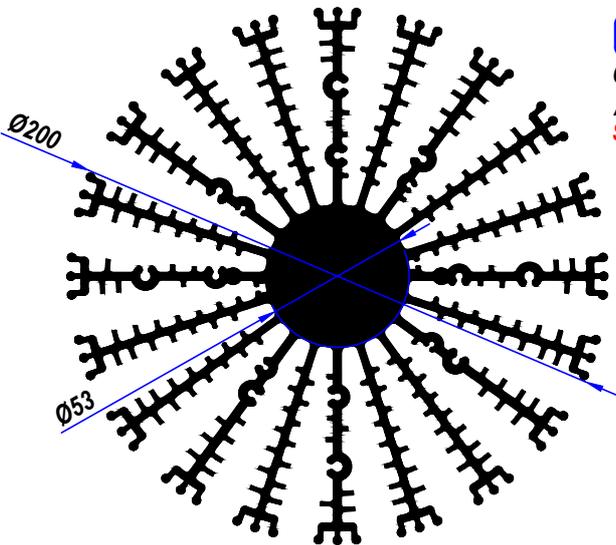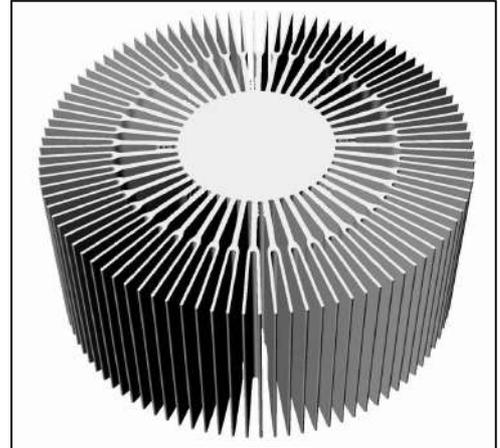

**AYS - 200**  
Q 200 mm  
Alu. Heatsink Prf.  
SCALE 1/3

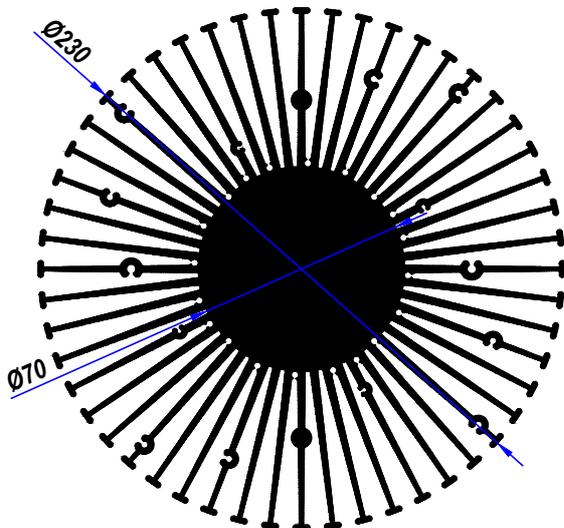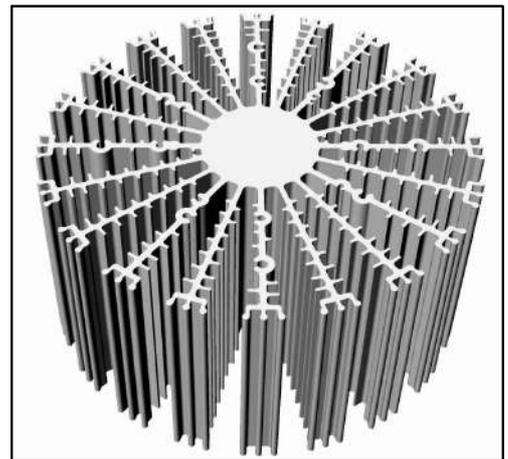









**AYS - 230**  
Q 230 mm  
Alu. Heatsink Prf.  
SCALE 1/3

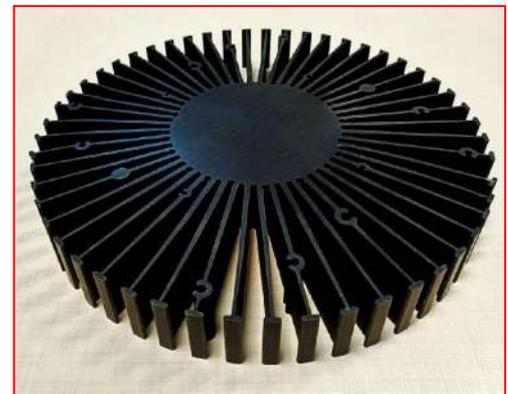

All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

mail : [info@ledaks.com](mailto:info@ledaks.com)

web : [www.ledaks.com.tr](http://www.ledaks.com.tr)

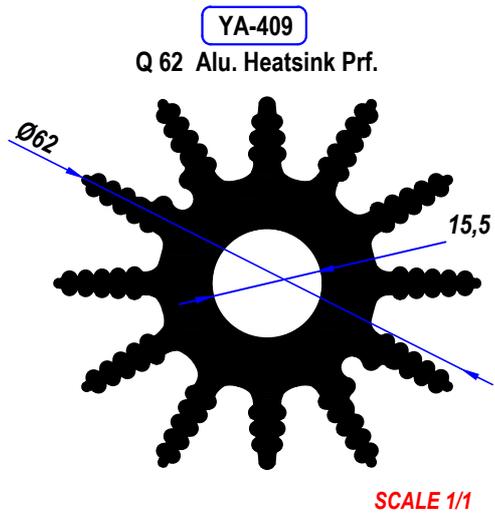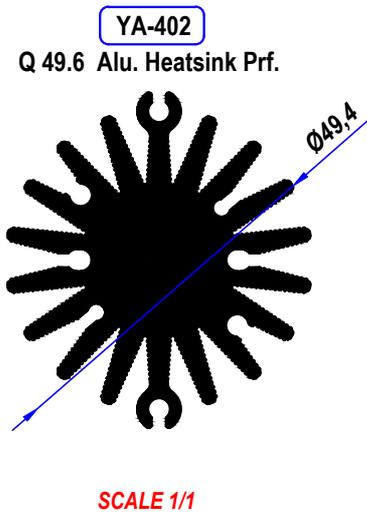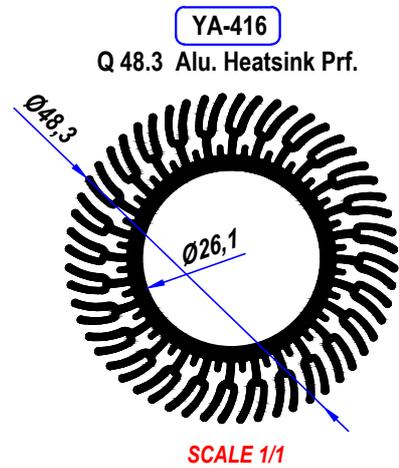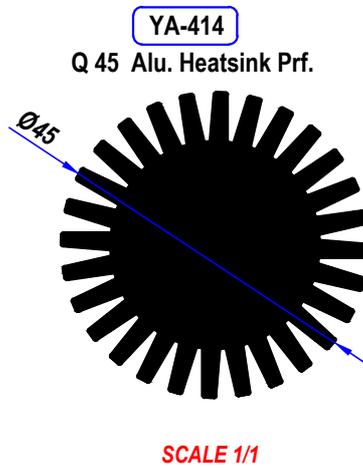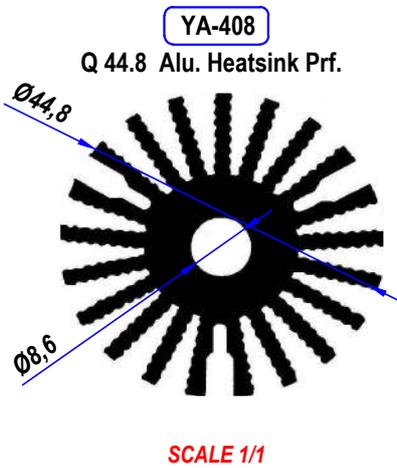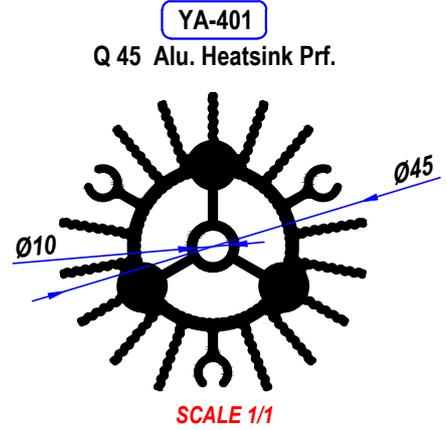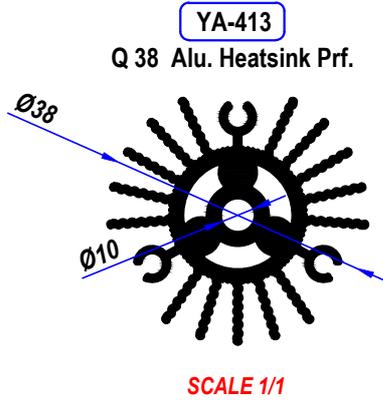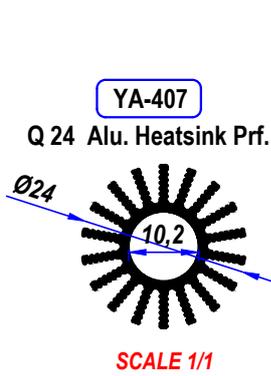


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

YA-415

Q 63.6 Alu. Heatsink Prf.


SCALE 2/3

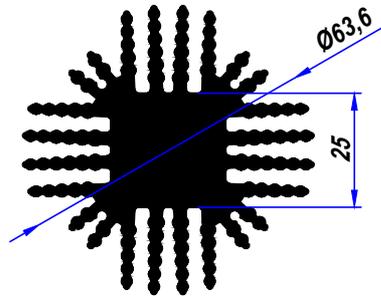

YA-417


Q 65 Alu. Heatsink Prf.

SCALE 3/4

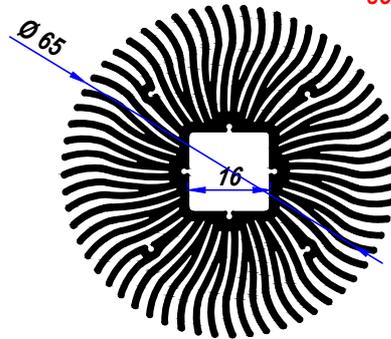

YA-410

Q 80 Alu. Heatsink Prf.

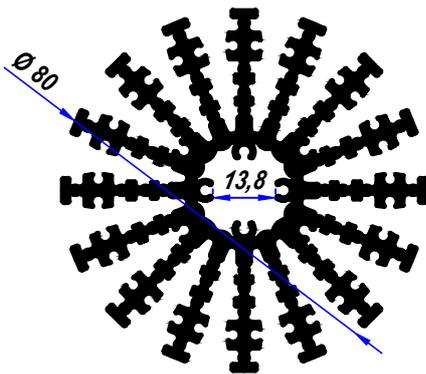

SCALE 3/4

YA-410 F


Q 80 - Alu Flange



not to scale

YA-418


Q 90 Alu. Heatsink Prf.

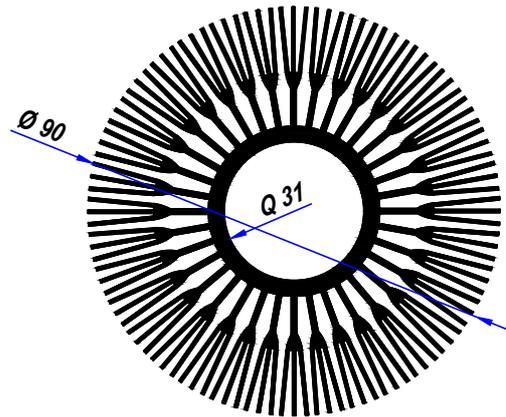

SCALE 3/4

YA-418 A

Q 90 Alu. Heatsink Prf.

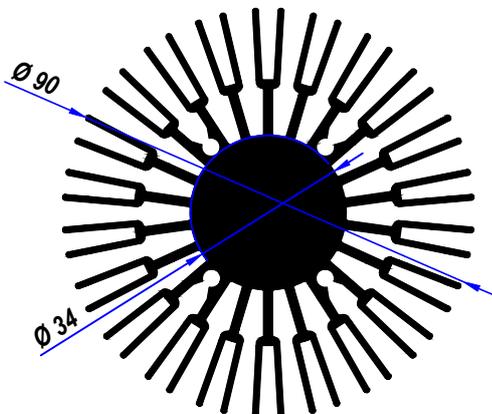

SCALE 3/4

YA-418 F


Q 90 - Alu Flange



not to scale

YA-418 B

Q 90 Alu. Heatsink Prf.

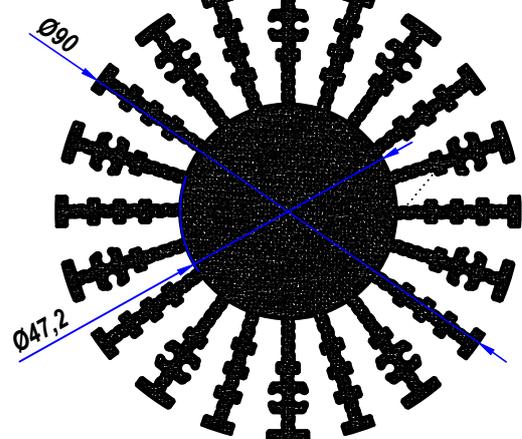


SCALE 3/4

All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

YA-419

Q 100 Alu. Heatsink Prf.


SCALE 1/2

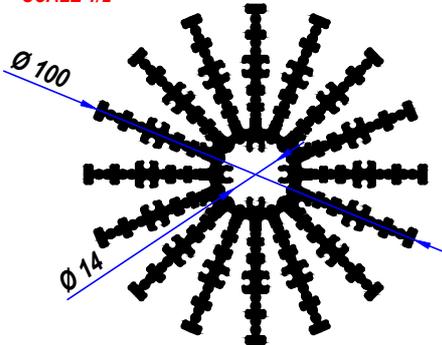

YA-419 A

Q 100 Alu. Heatsink Prf.

SCALE 1/2

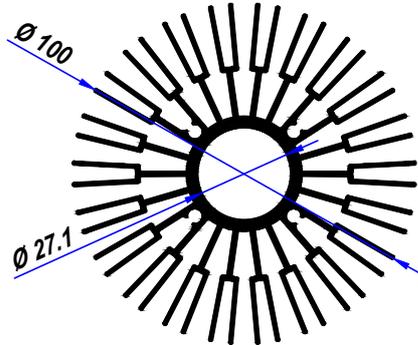

YA-419 F

Q 100 - Alu Flange




not to scale

YA-420

Q 120 Alu. Heatsink Prf.


SCALE 1/2

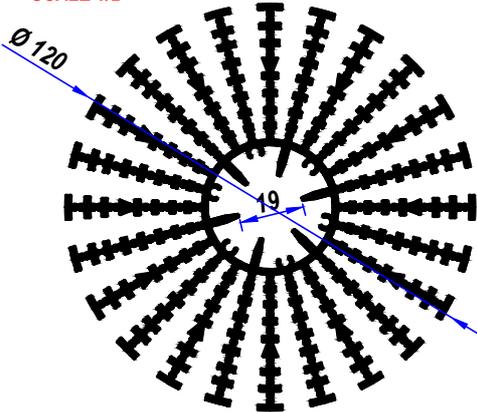

YA-420 A

Q 120 Alu. Heatsink Prf.

SCALE 1/2

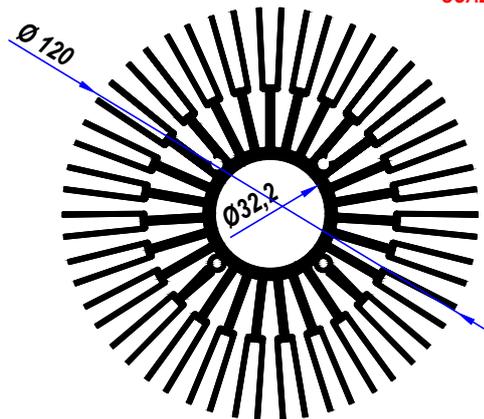

YA-420 F

Q 120 - Alu Flange




not to scale

YA-420 B

Q 120 Alu. Heatsink Prf.


SCALE 1/2

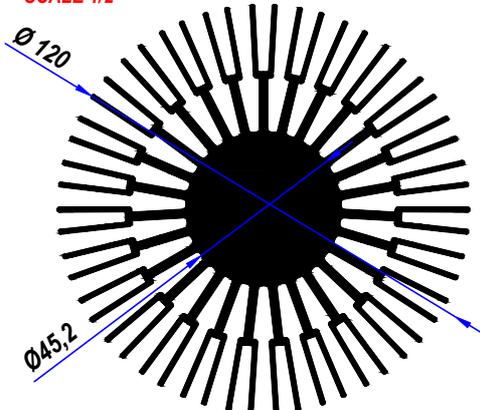

YA-420 C

Q 120 Alu. Heatsink Prf.

SCALE 1/2

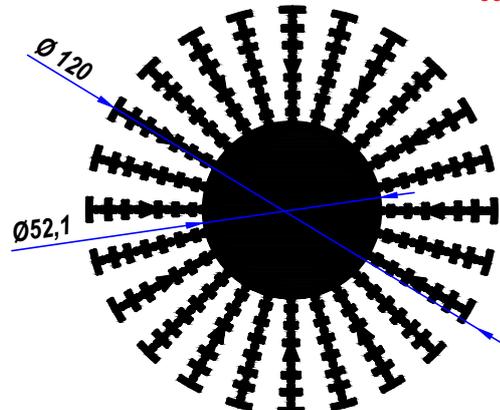


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

YA-411

Q 140 Alu. Heatsink Prf.

SCALE 1/2

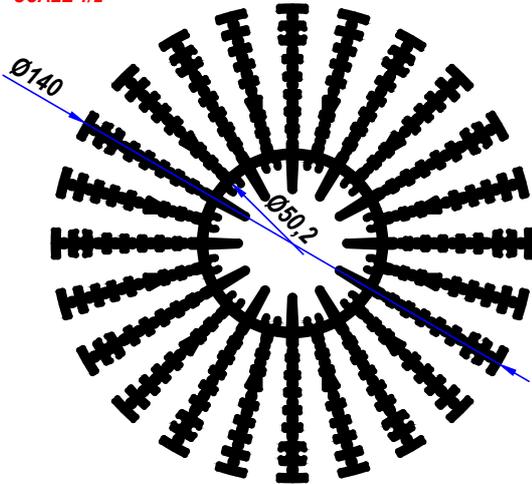

YA-411 F


Q 140 - Alu Flange



YA-411 A

Q 140 Alu. Heatsink Prf.


SCALE 1/2

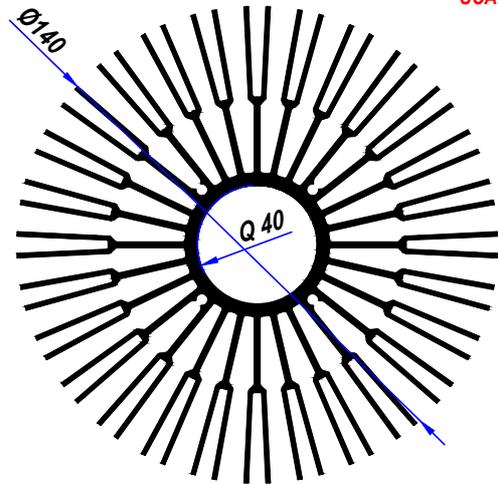

YA-412

Q 160 Alu. Heatsink Prf.

SCALE 1/2

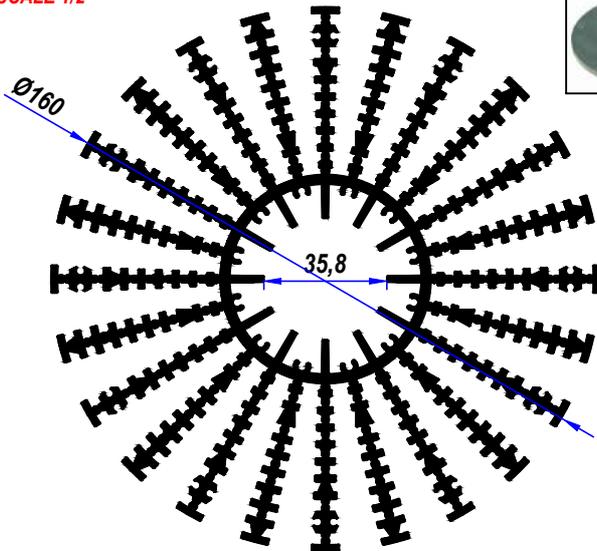

YA-412 F


Q 160 - Alu Flange



YA-412 A

Q 160 Alu. Heatsink Prf.


SCALE 1/2

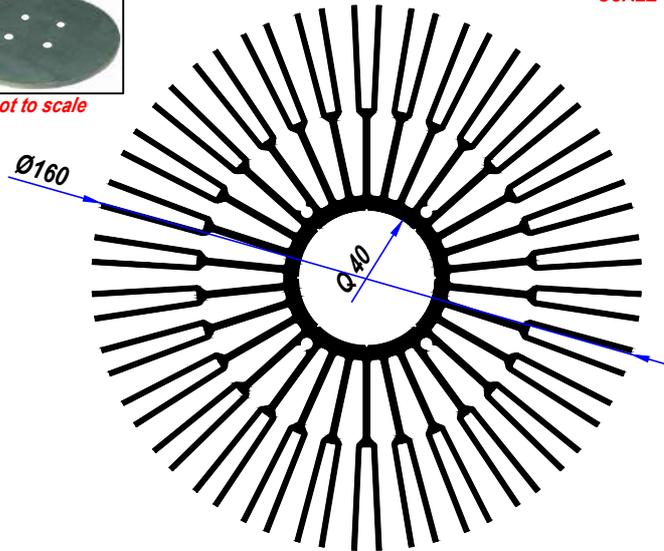

YA-423

Q 50 Alu. Heatsink Prf.


SCALE 1/1

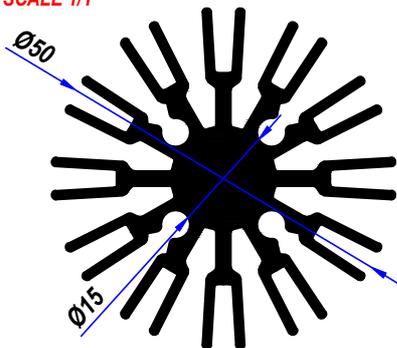




YA-424

Q 70 Alu. Heatsink Prf.




SCALE 3/4

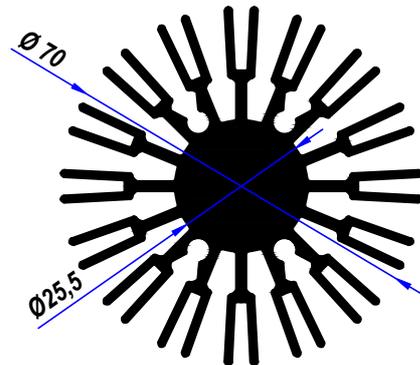

All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.



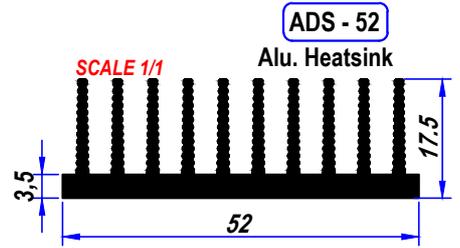
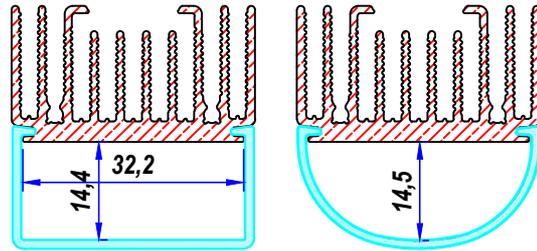



**YA-253 M** Mini Bracket Set







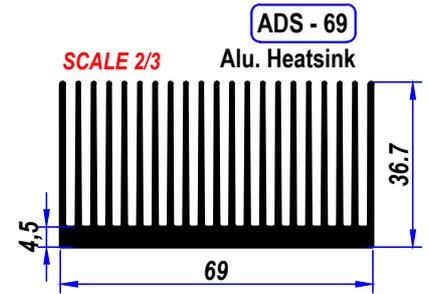
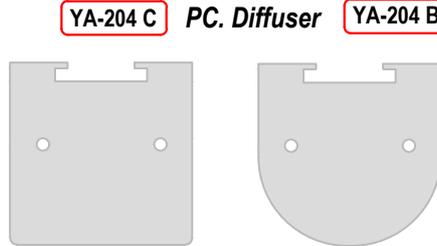



**YA-207 D**  
Hanger Wire









Alu. End Cap

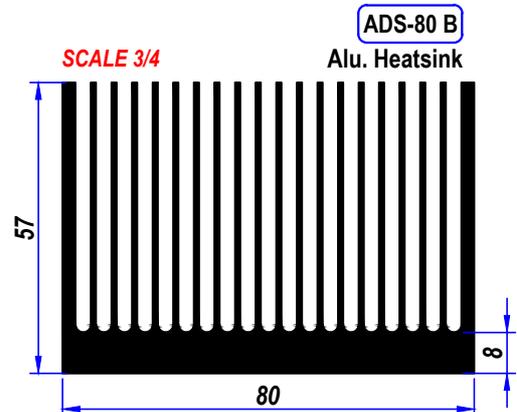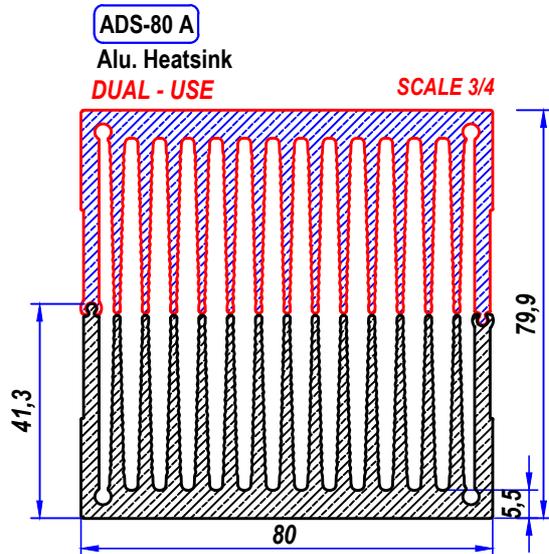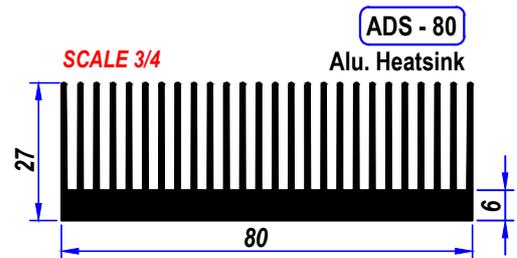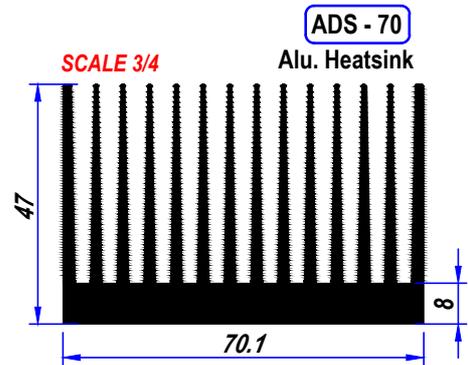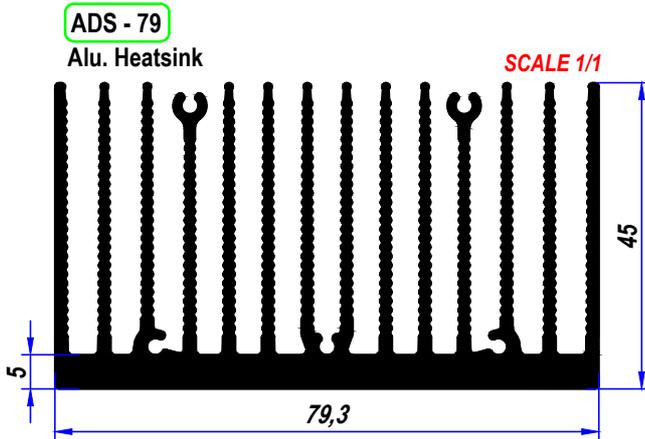


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

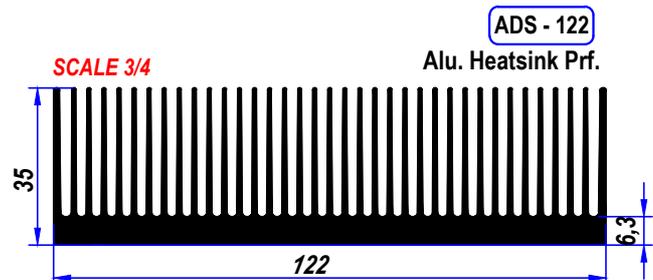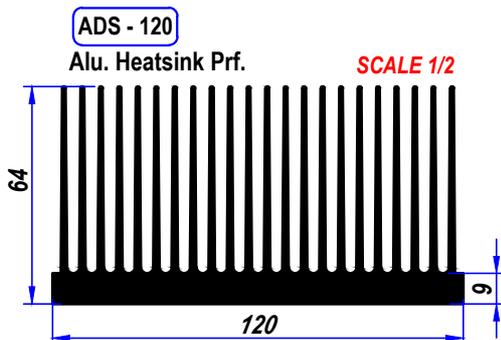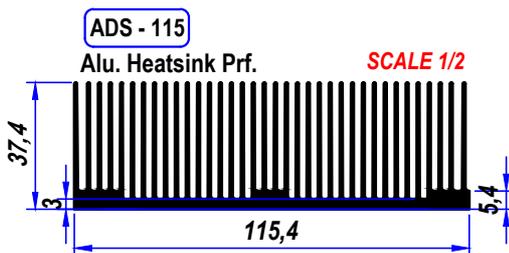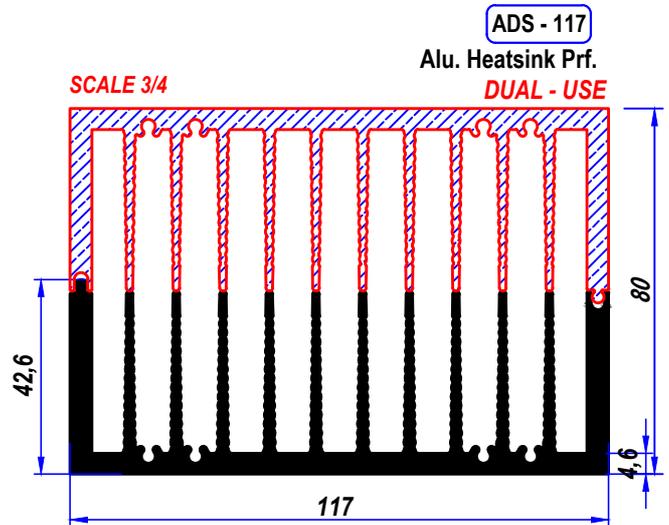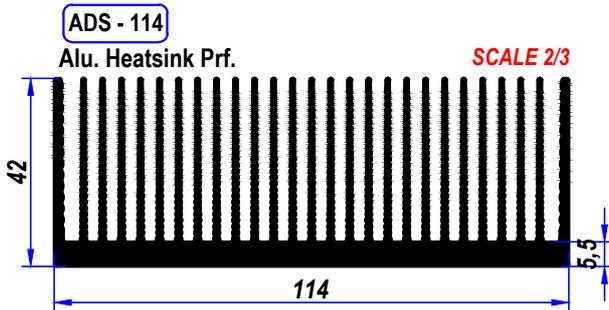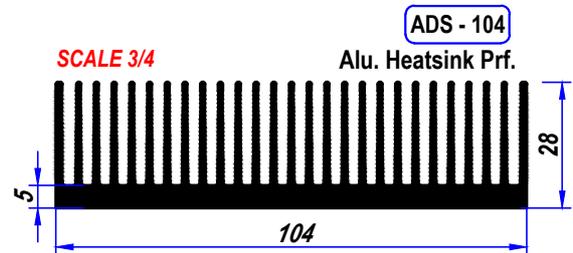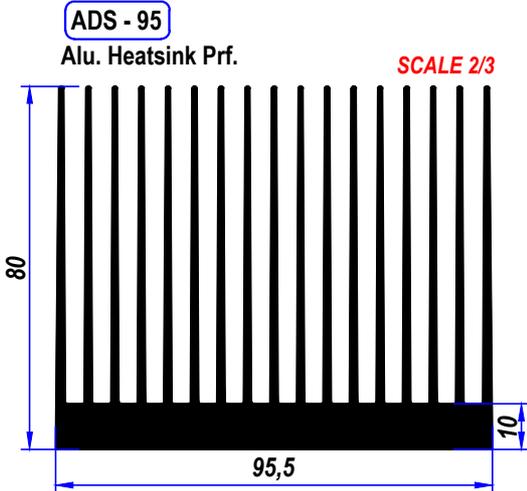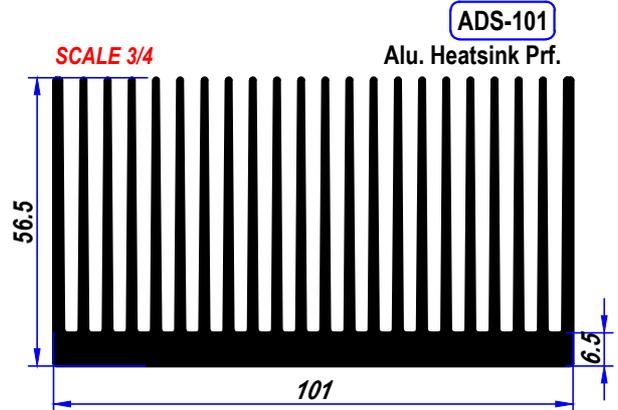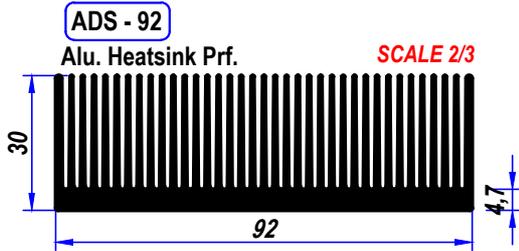

All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

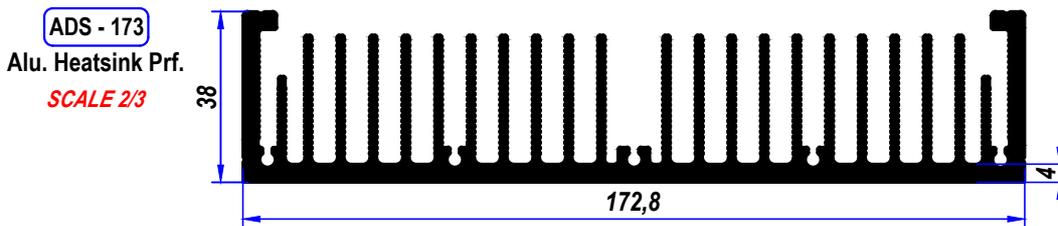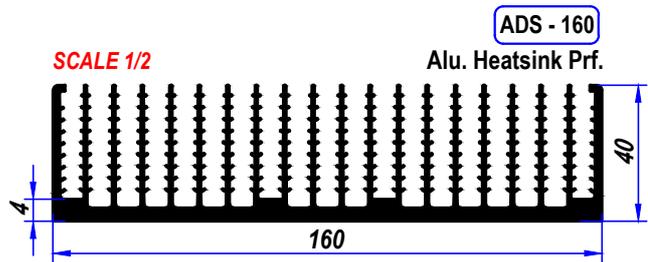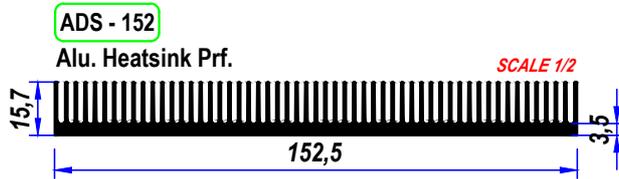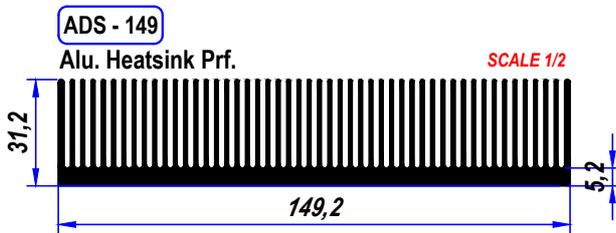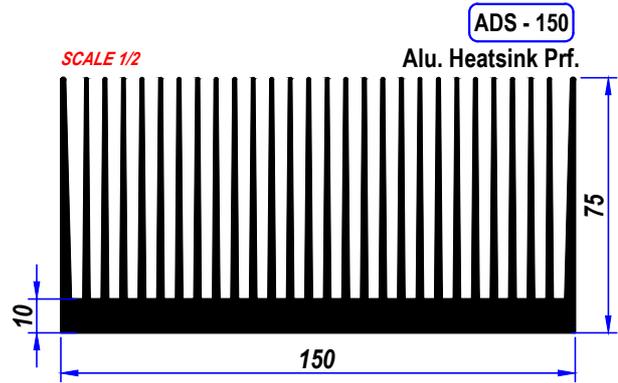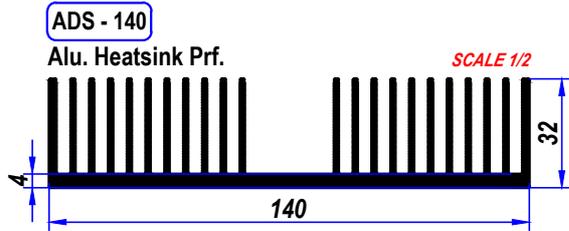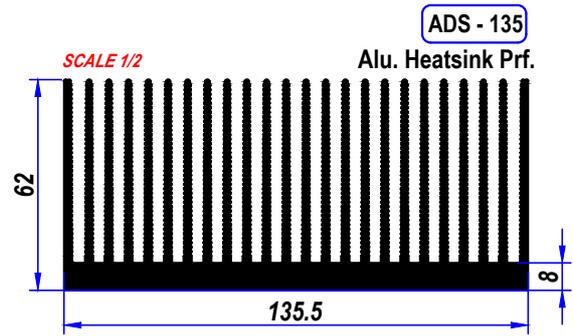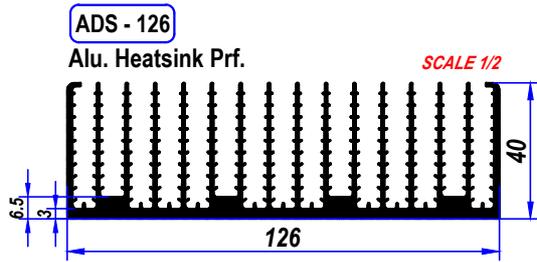


*YA-1310A PC. glass, suitable for canopy frame. YA-173 A aluminum profile is suitable for Module Lens, Street Lighting and Projector applications.*

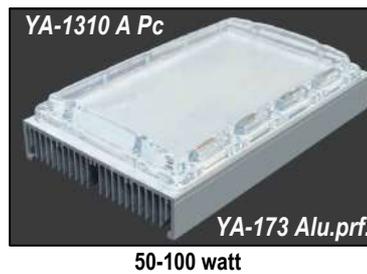


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

**ADS - 178**  
Alu. Heatsink Prf.  
SCALE 1/2

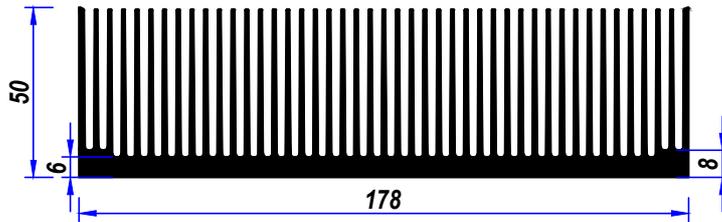


**ADS - 180**  
Alu. Heatsink Prf.  
SCALE 1/2

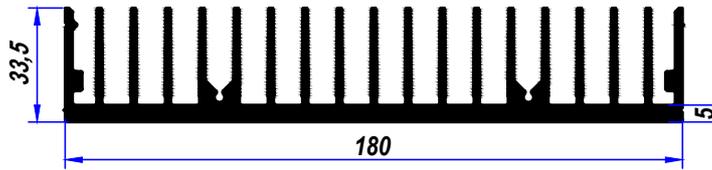

**YA-1310 A**  
P.C. Enj. Dif + Gasket




**ADS - 190**  
Alu. Heatsink Prf.  
SCALE 1/2

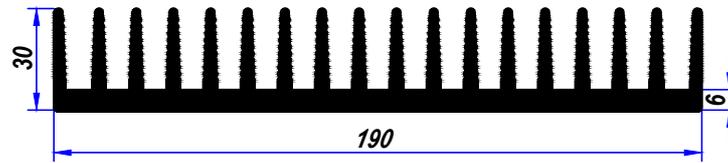


**YA-1310 A**  
P.C. Enj. Dif + Gasket




**ADS - 200**  
Alu. Heatsink Prf.  
SCALE 1/2

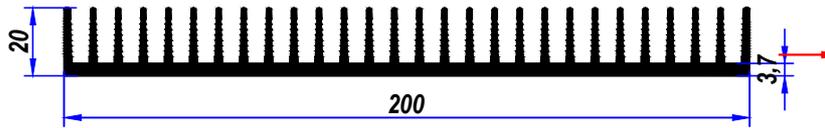


**ADS - 209**  
Alu. Heatsink Prf.  
SCALE 1/2

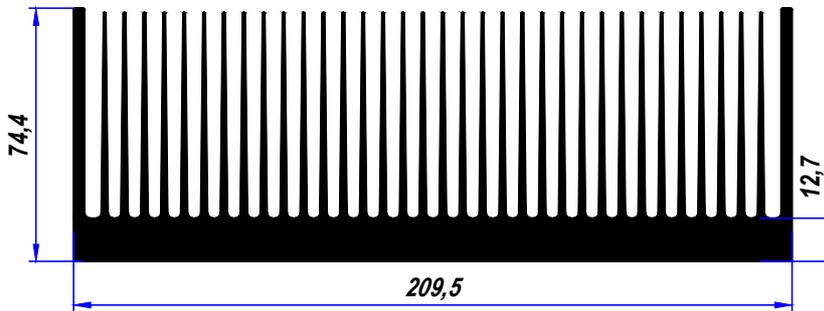


**ADS - 210**  
Alu. Heatsink Prf.  
SCALE 1/2

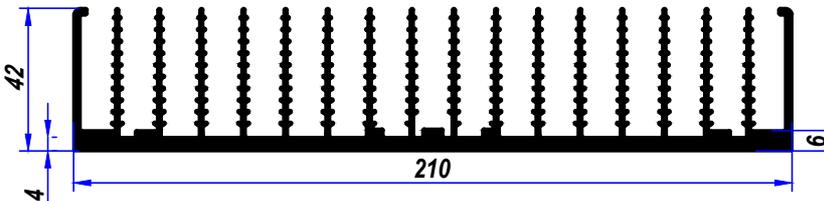

**ADS - 210 A**  
Alu. Heatsink Prf.  
SCALE 1/2

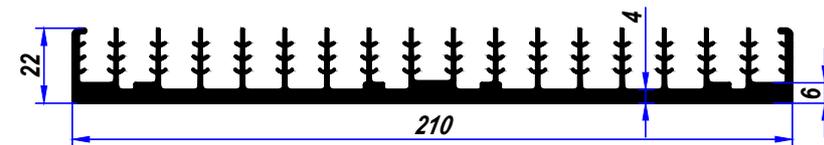


**ADS - 223**  
Alu. Heatsink Prf.  
SCALE 1/2

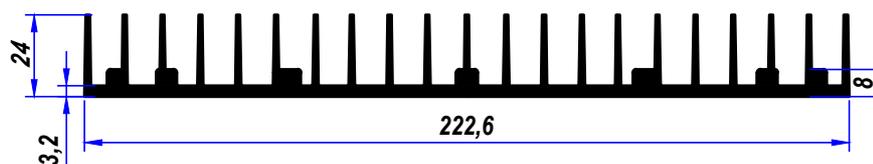


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.


**NEW**  
**ADS - 244**  
 Alu. Heatsink Prf.  
 SCALE 1/2

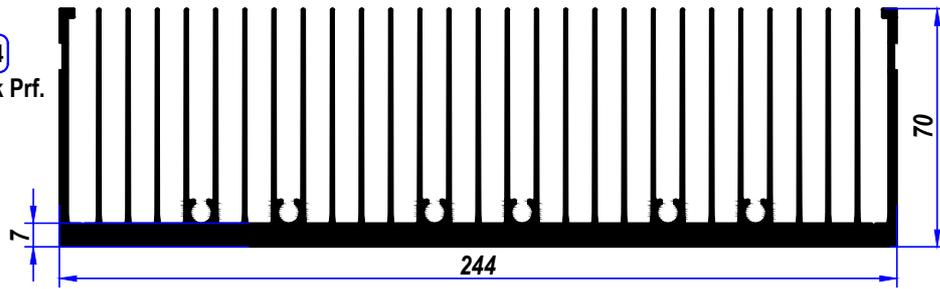

**ADS - 250**  
 Alu. Heatsink Prf.  
 SCALE 1/2

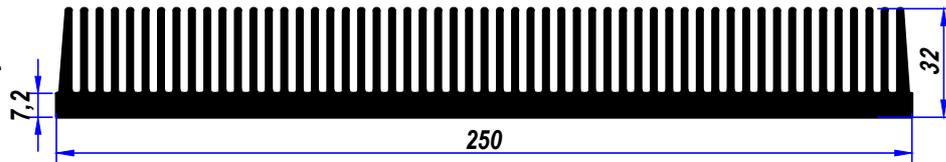


**ADS - 267**  
 Alu. Heatsink Prf.  
 SCALE 1/2

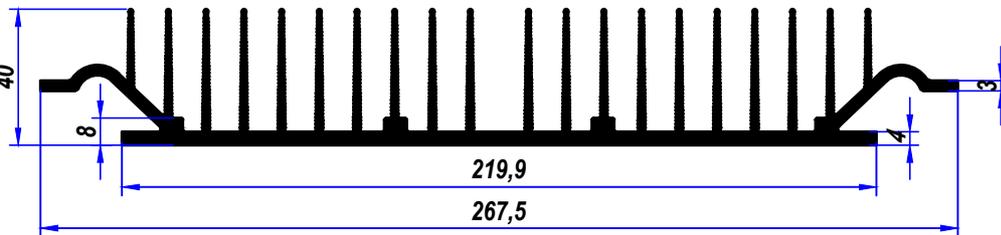


Suitable for canopy frame, alu.prf. and PC Diffuser

**ADS - 278**  
 Alu. Heatsink Prf.  
 SCALE 1/2

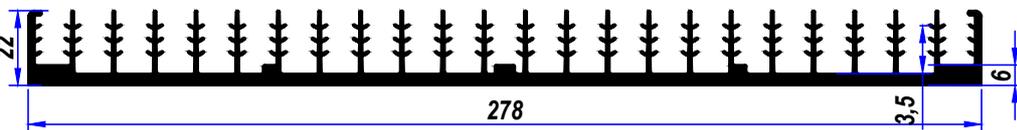


**ADS - 280**  
 Alu. Heatsink Prf.  
 SCALE 1/2

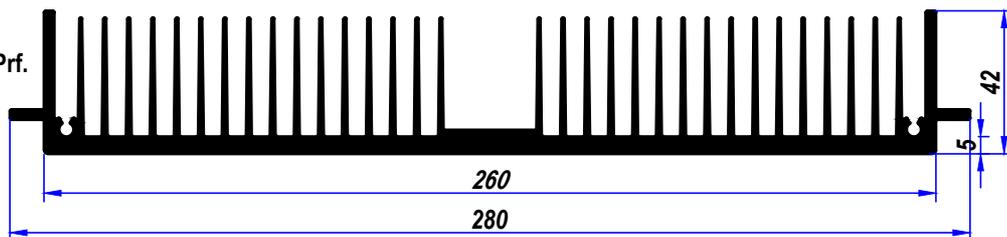


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.


**ADS - 292**  
Alu. Heatsink Prf.  
**SCALE 1/3**

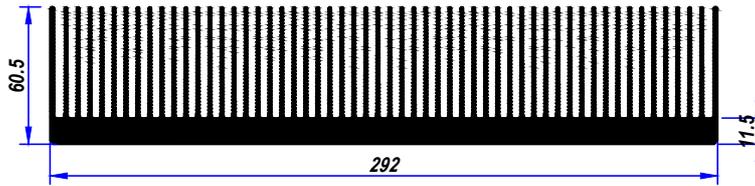


**ADS - 296**  
Alu. Heatsink Prf.  
**SCALE 1/3**

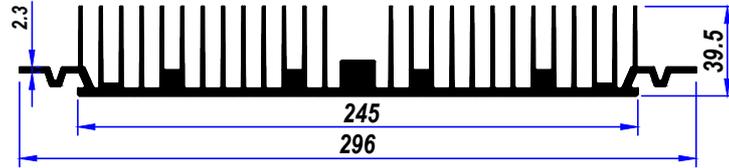

**ADS-296 A**  
Alu. Heatsink Prf.  
**SCALE 1/3**

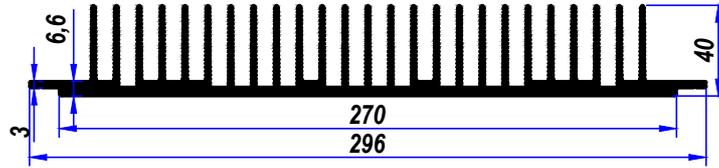


**ADS - 298**  
Alu. Heatsink Prf.  
**SCALE 1/3**

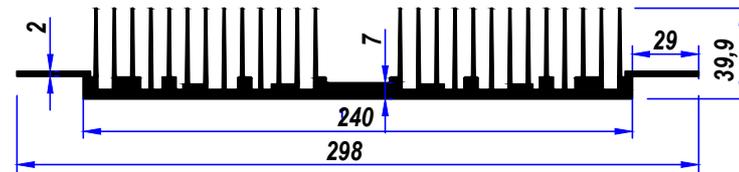

**ADS-298 A**  
Alu. Heatsink Prf.  
**SCALE 1/3**



**ADS-300 A**  
Alu. Heatsink Prf.  
**SCALE 1/3**

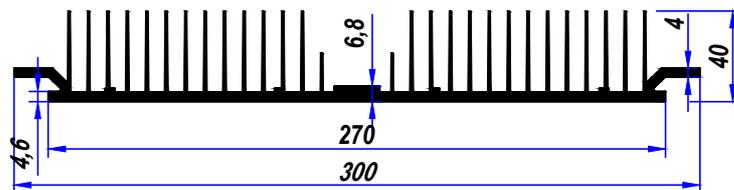


**YA-1311 A**

PC. Enj. Diffuser + Gasket




Transparent  
PC DIFFUSER ; 270 x 370 mm

















**ADS - 305**  
Alu. Heatsink Prf.  
**SCALE 1/3**

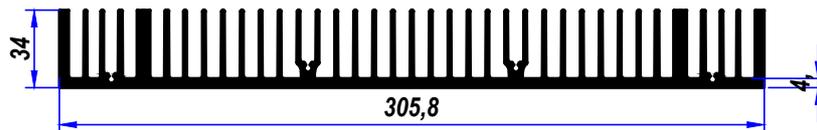











**ADS - 307**  
Alu. Heatsink Prf.  
**SCALE 1/3**

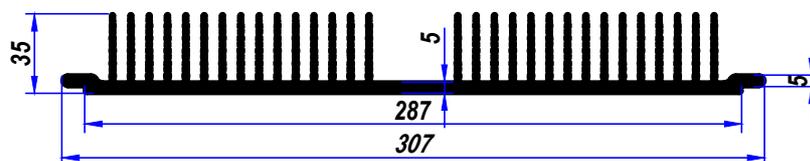











**This aluminium profile, together with YA-1311 A PC., is suitable for canopy frame construction.**  
All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

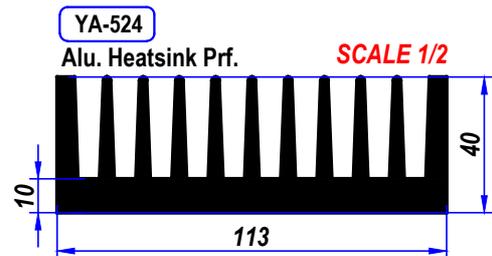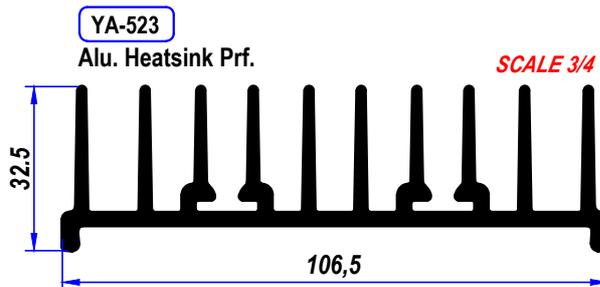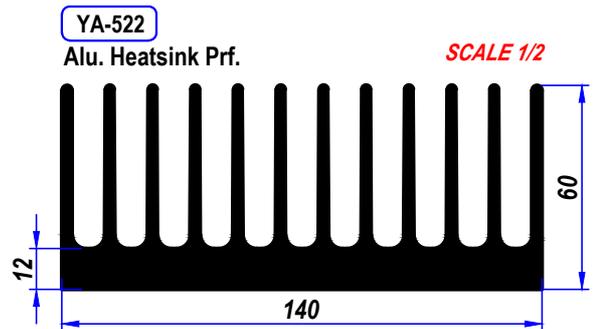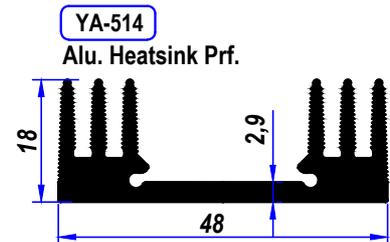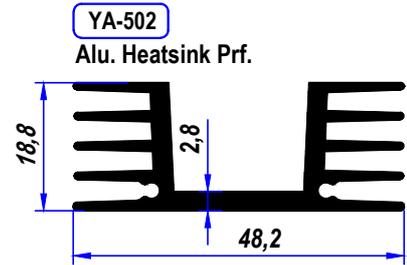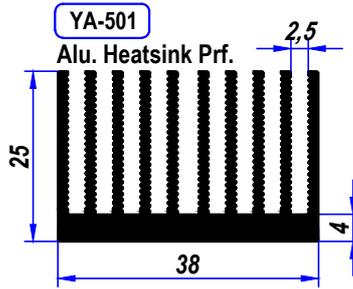












All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

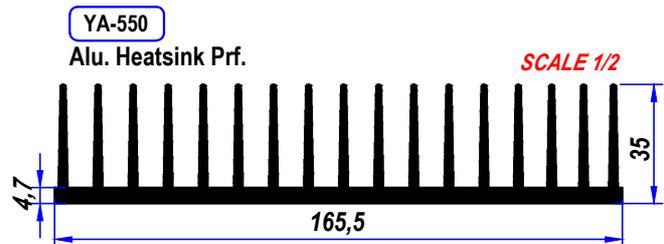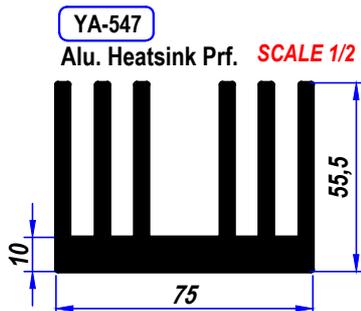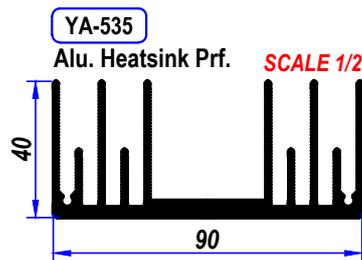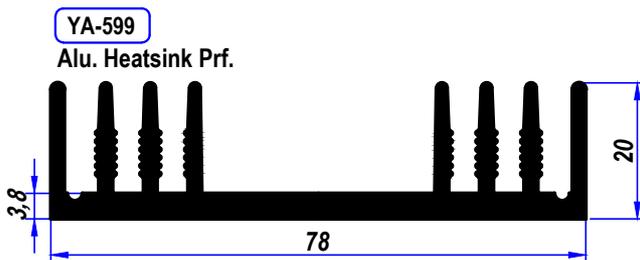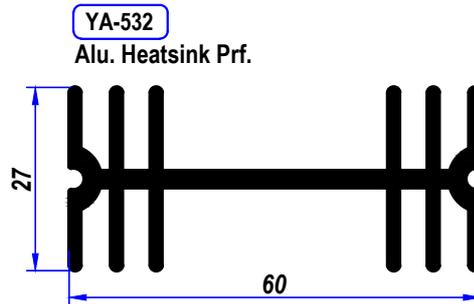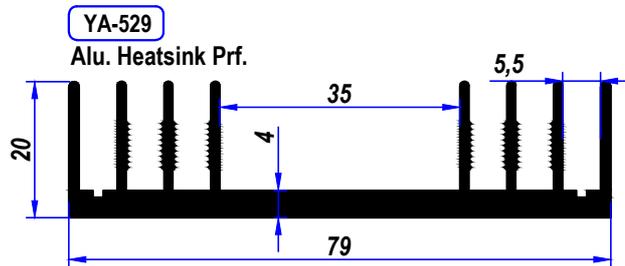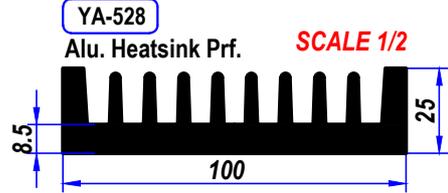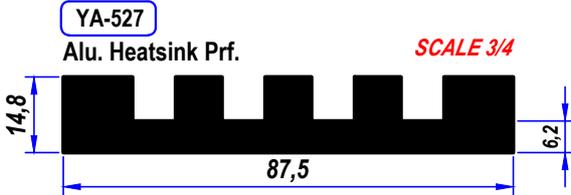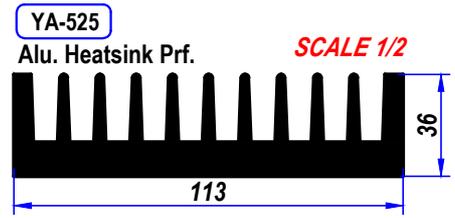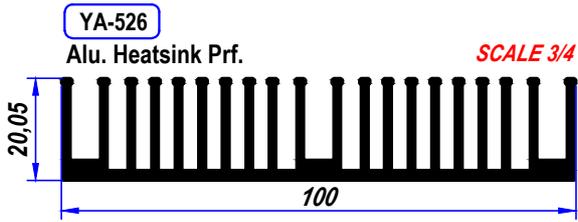













All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

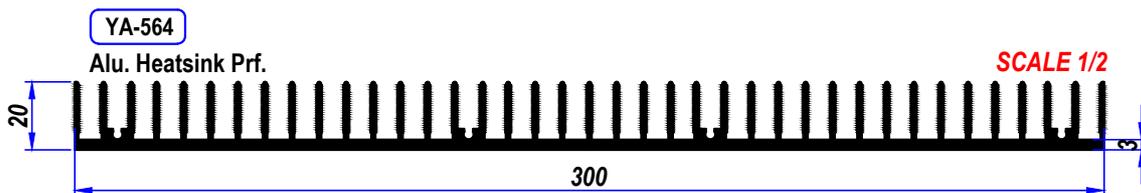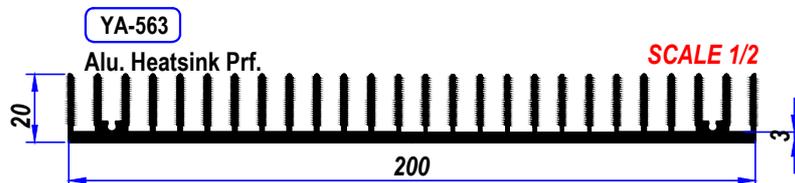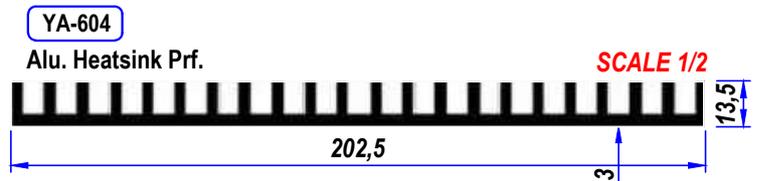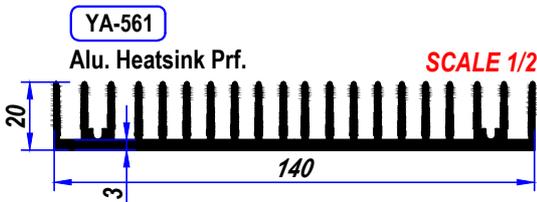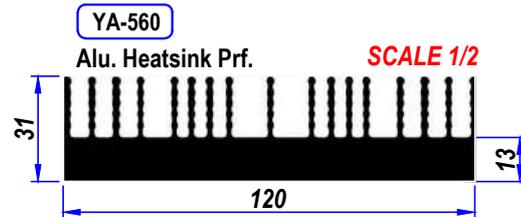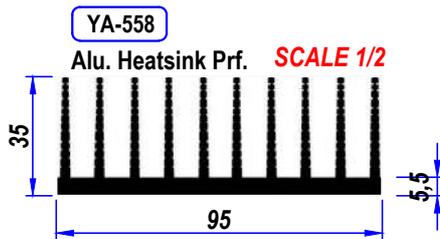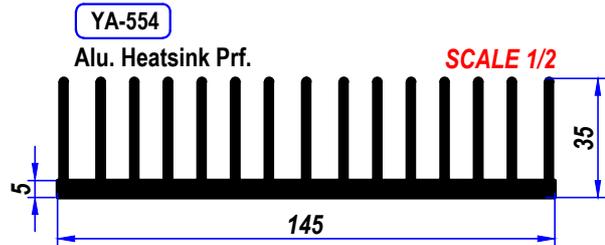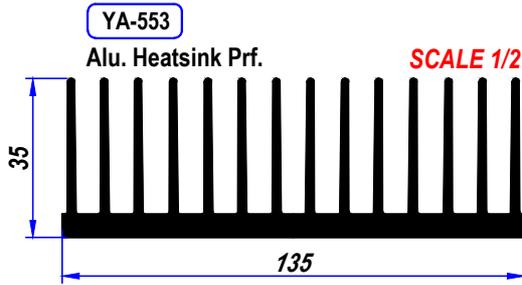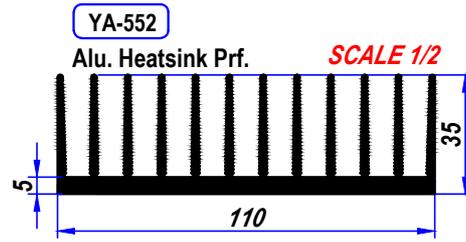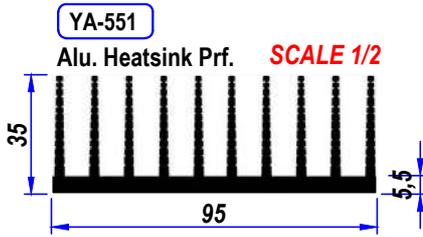











All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

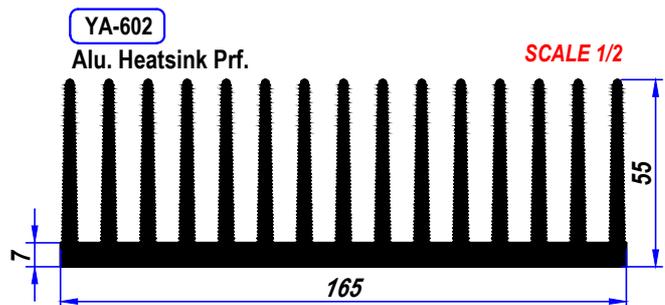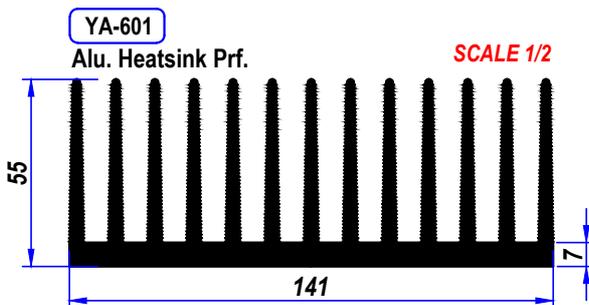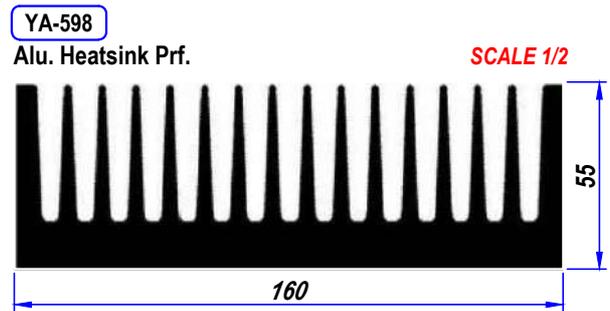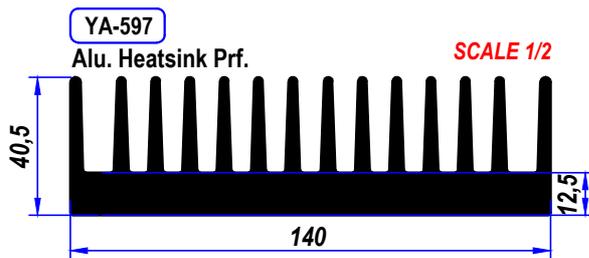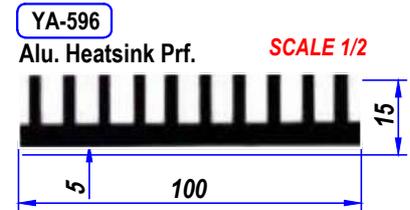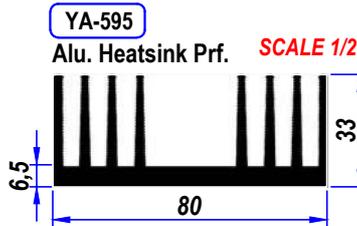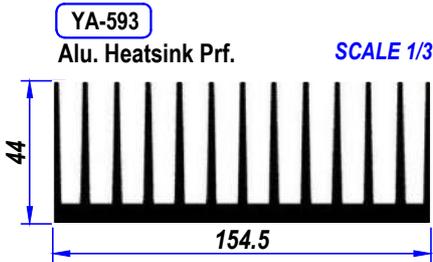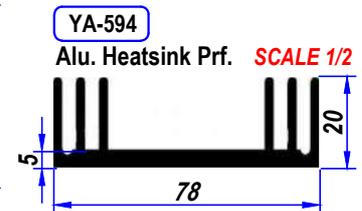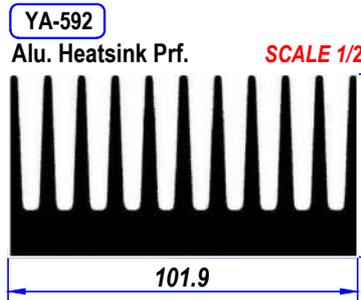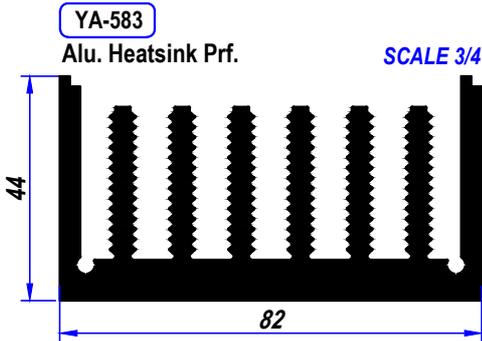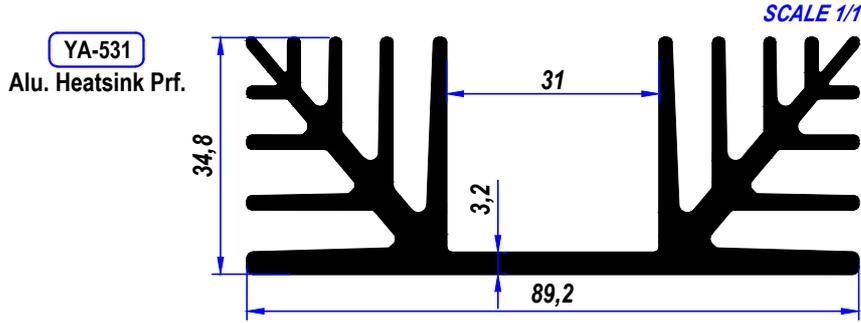

All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

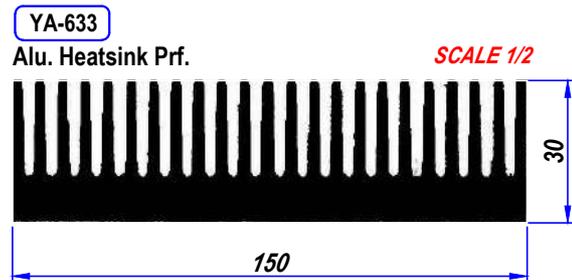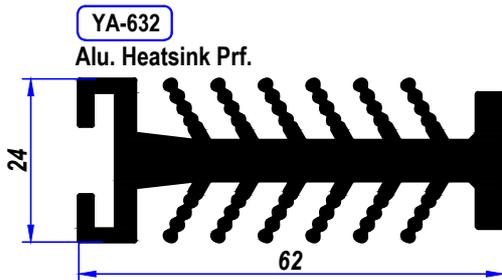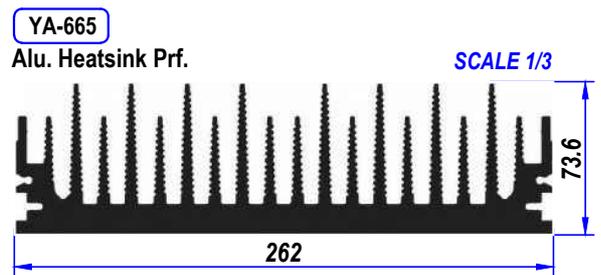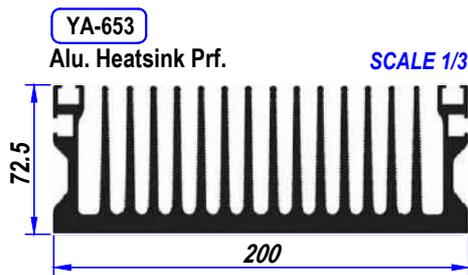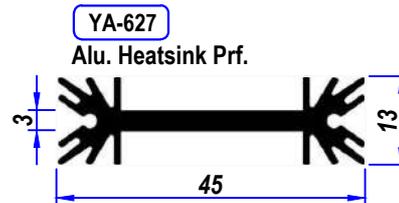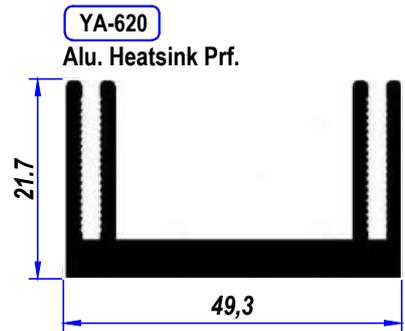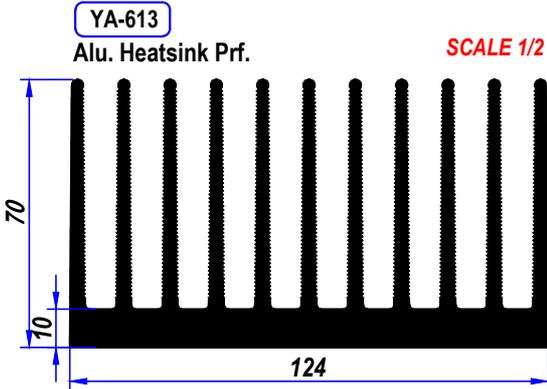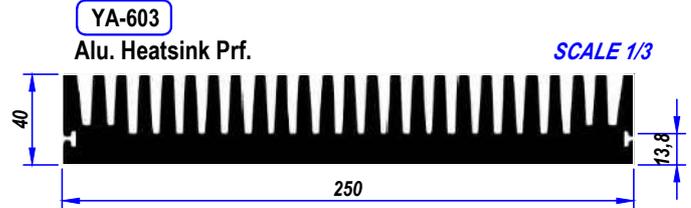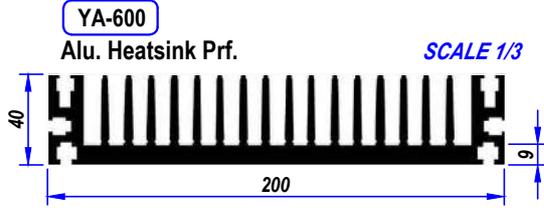

All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

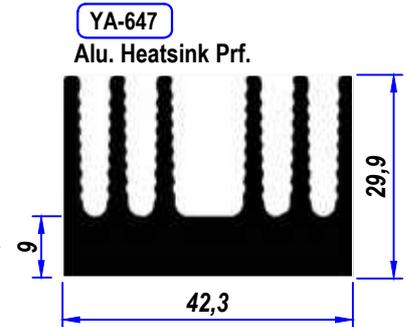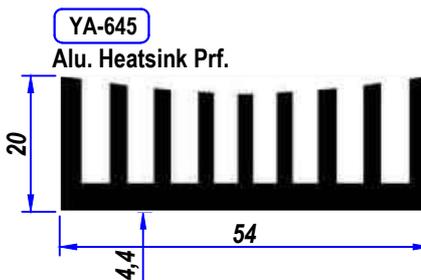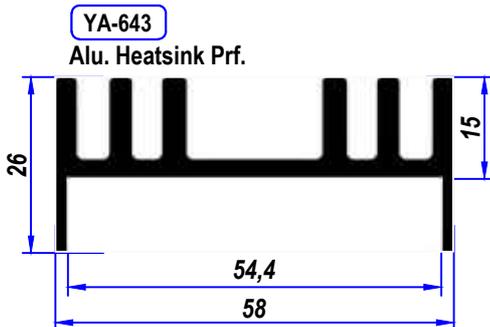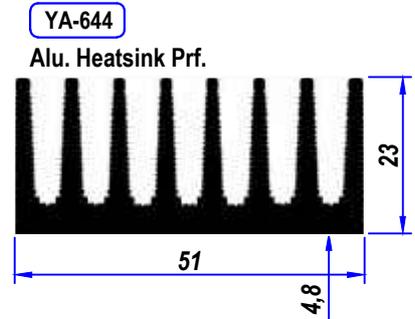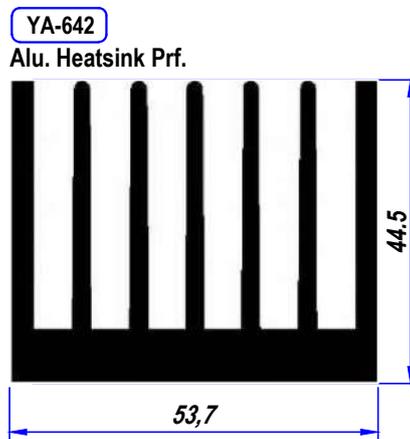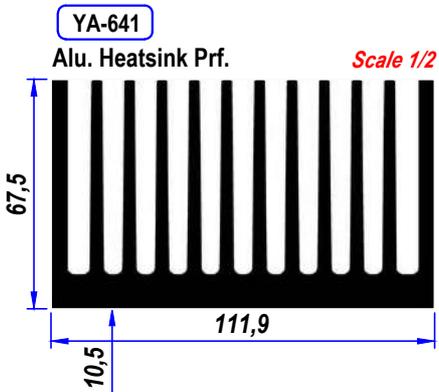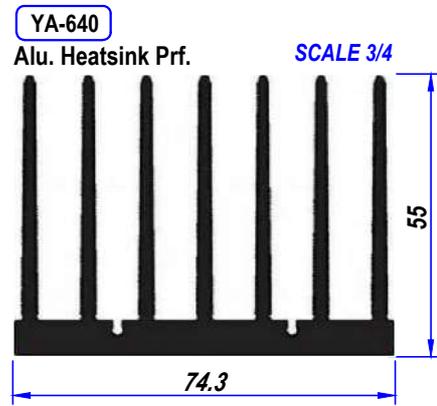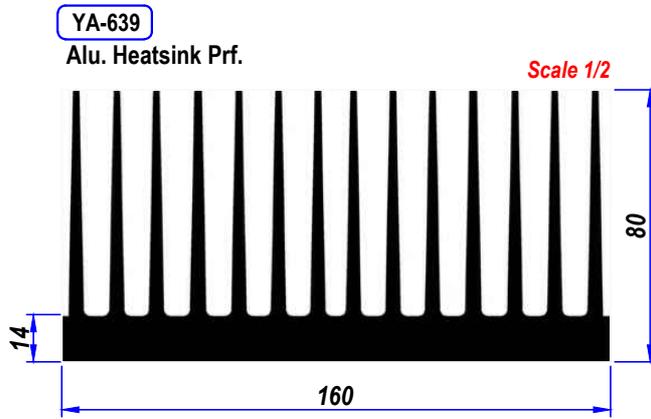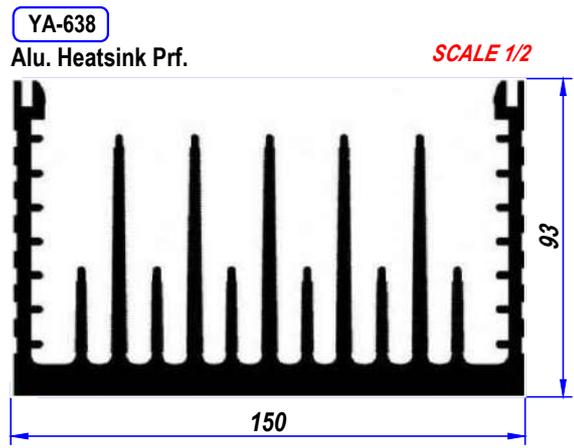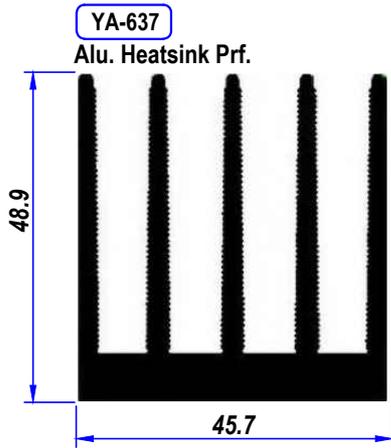


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

YA-648

Alu. Heatsink Prf.


Scale 1/2

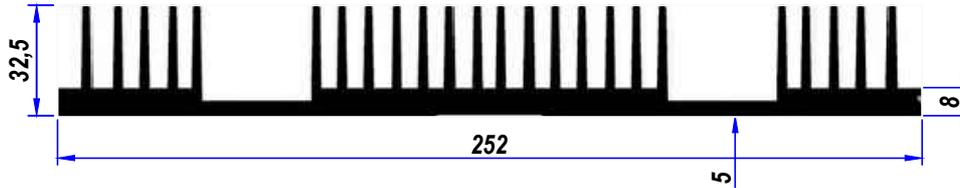

YA-649

Alu. Heatsink Prf.


Scale 1/2



YA-651


Alu. Heatsink Prf.

Scale 1/2

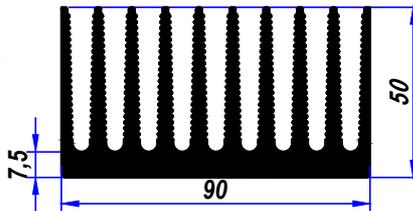

YA-652


Alu. Heatsink Prf.

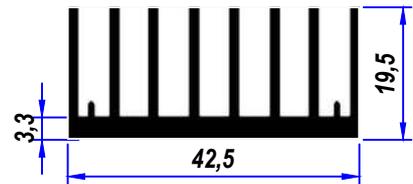

YA-654

Alu. Heatsink Prf.


Scale 1/3

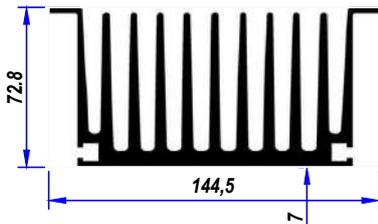

YA-650


Alu. Heatsink Prf.

Scale 1/4

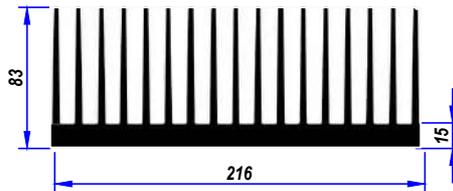

YA-655


Alu. Heatsink Prf.

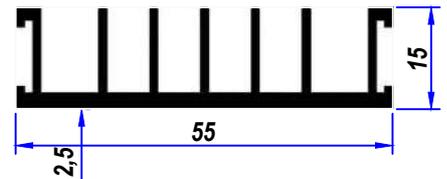

YA-656

Alu. Heatsink Prf.


Scale 1/2



YA-657

Alu. Heatsink Prf.


Scale 1/2



YA-658


Alu. Heatsink Prf.

Scale 1/2




YA-663

Alu. Heatsink Prf.

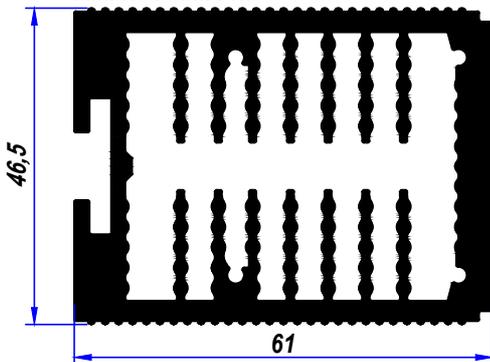


YA-666

Alu. Heatsink Prf.



YA-667

Alu. Heatsink Prf.




YA-668

Alu. Heatsink Prf.














YA-669

Alu. Heatsink Prf.

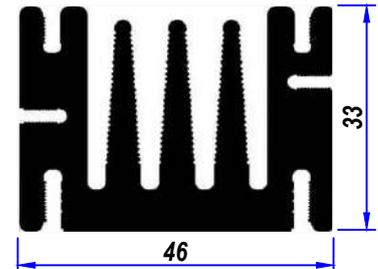

All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

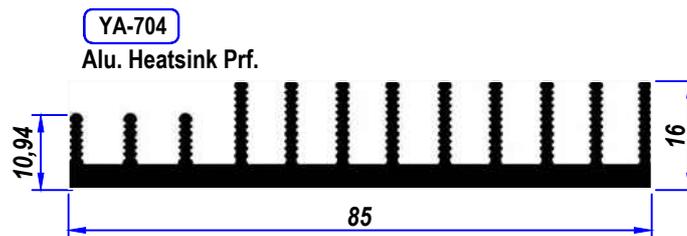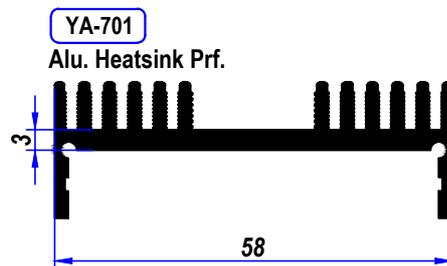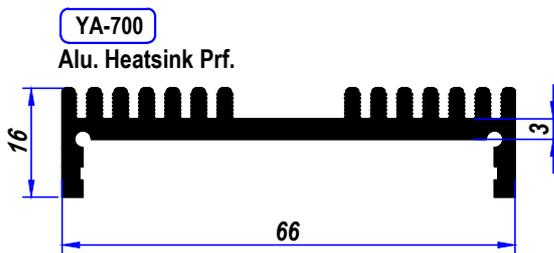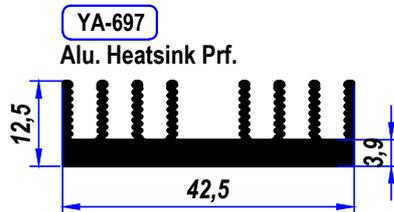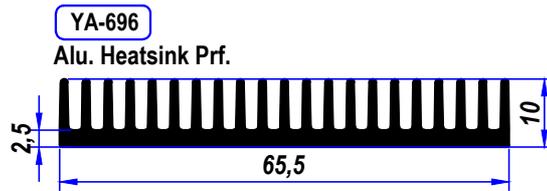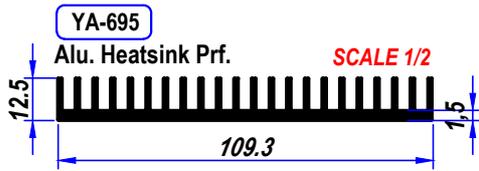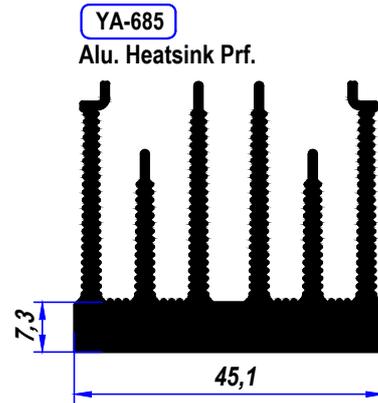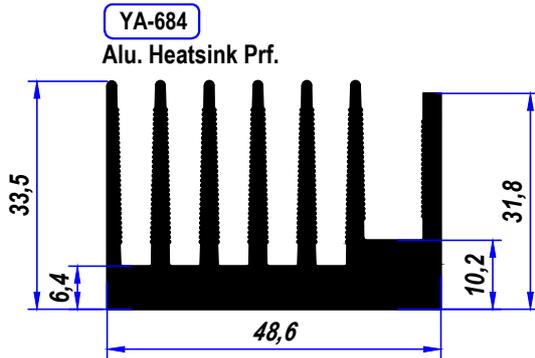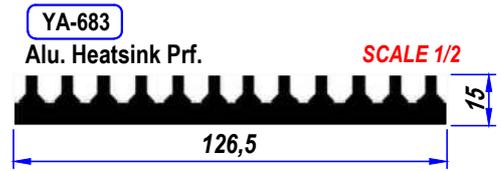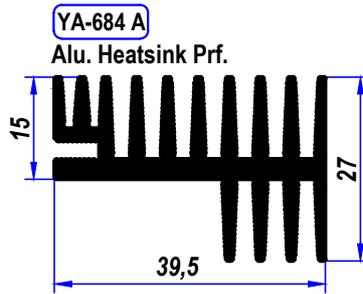


All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

YA-706


Alu. Heatsink Prf.

Scale 1/2

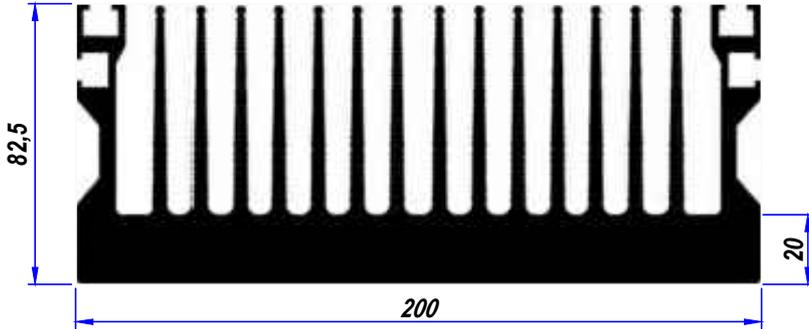


YA-705

Alu. Heatsink Prf.




YA-707

Alu. Heatsink Prf.

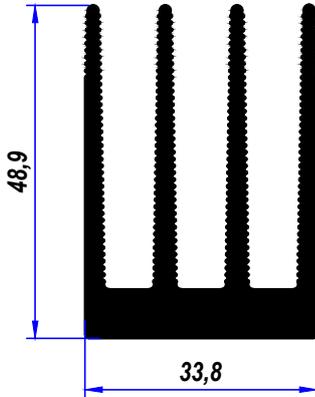


YA-707 A

Alu. Heatsink Prf.

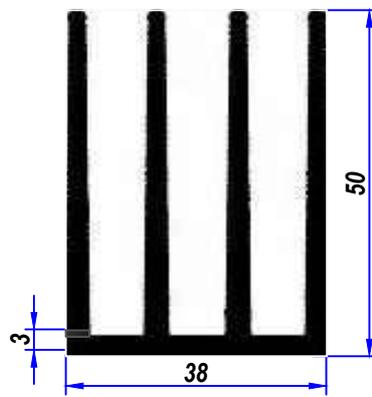

YA-709


Alu. Heatsink Prf.

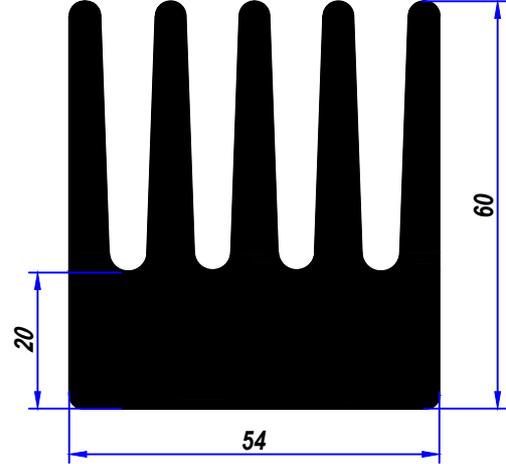

YA-708

Alu. Heatsink Prf.


Scale 1/2

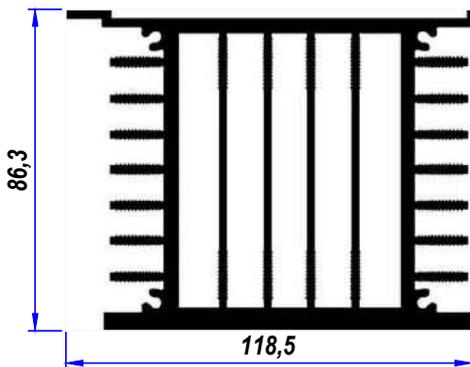

YA-710

Alu. Heatsink Prf.

Scale 1/2

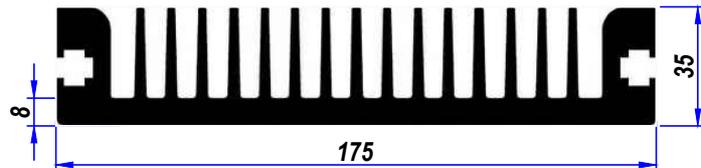



YA-714

Alu. Heatsink Prf.

Scale 1/2

YA-715

Alu. Heatsink Prf.

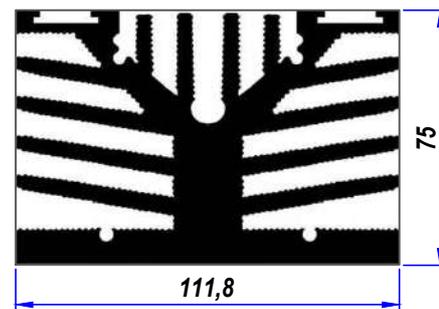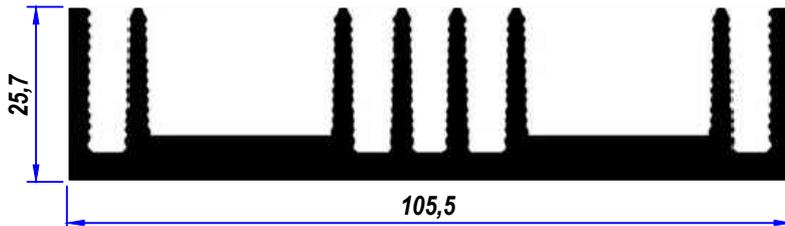

All cutting dimensions can be done according to requirements. Black and other colorful anodize can be coated.

**Ledaks®**  
INNOVATIVE SOLUTIONS PRODUCER

**Copyright - All rights reserved**

**No pictures and drawings can be copied without permission**

**Dimensions & designs of our products are subject to change without notice**

**Adress : Kocak Caddesi No: 71 Siteler Altindag Ankara TURKIYE**

**Tel : +90 312 351 15 15 Web : [www.ledaks.com](http://www.ledaks.com)**

**Whatsapp: +90 554 497 41 71 / +90 549 497 30 35 / +90 554 896 20 85**

**Mail : [info@ledaks.com](mailto:info@ledaks.com) / [export@ledaks.com](mailto:export@ledaks.com)**